

203004 HYDROLINE 21 PERFORMANCE LED

Linear ground-recessed luminaire for outdoor installation, length 985mm, Phospho-chromatised and polyester powder coated extruded copper-free aluminium body and stainless steel AISI 304 frame, tempered safety glass, moulded silicone gasket. Built-in LED driver 220-240V 50-60Hz, with 21 CREE XP-G3 LED. IP67 rating.

Energy Label A++




- Material: high corrosion resistance extruded copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 21 x 1.5W CREE "XP-G3" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel AISI 304 trim.
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Max static weight resistance 5000 Kg
- Protection against impact IK10 (20 joule)
- Double PG13.5 cable gland
- Stainless steel housing for recess included.
- 1 mt. neoprene power cable included.




1-10 V DIMMABLE / DALI VERSION
AVAILABLE ON REQUEST



AVAILABLE ON REQUEST

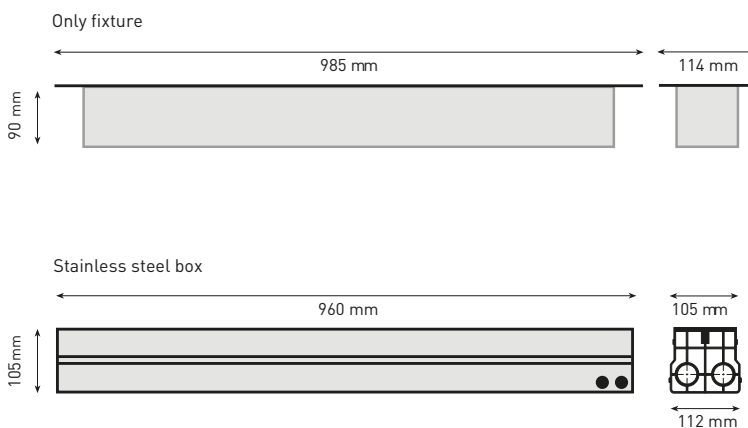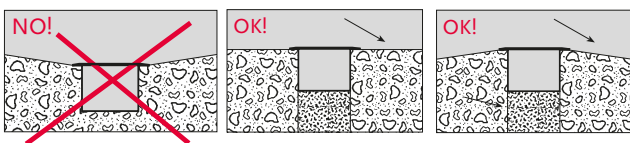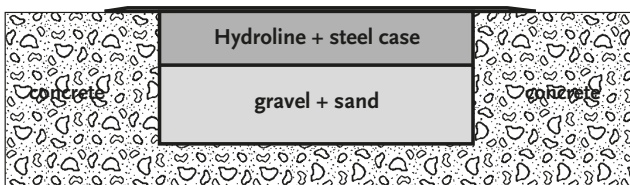

WHEN INSTALLING HYDROLINE, A "DRAINAGE BED" OF AT LEAST 20 CENTIMETERS HAS TO BE OBSERVED UNDER THE STAINLESS STEEL RECESSING BOX (GRAVEL AND SAND)



31.5 WATT
220-240V 50-60HZ ELECTRONIC
IP67
10.00 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	10°	3.024	96.00	STAINLESS STEEL
		30°	2.873	91.25	
		45°	2.729	86.67	
		ASYMMETRIC WALL-WASHER	2.873	91.25	
	4.000°K NEUTRAL-WHITE	10°	3.150	100.00	
		30°	2.993	95.00	
		45°	2.843	90.25	
		ASYMMETRIC WALL-WASHER	2.993	95.00	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ● BLUE