


101001

## CASE MICRO

Square small floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 1 CREE XP-G3 LED. IP65 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	10°	115	115.00
high-power led	30°	110	110.00
high-power led	45°	104	104.00
<b>4000°K neutral-white</b>			
high-power led	10°	120	120.00
high-power led	30°	114	114.00
high-power led	45°	109	109.00
<b>2700°K CCT</b> available on request			

### Finish color options:

-  Textured Grey  
RAL 9006
-  Anthracite Grey  
RAL 7016
-  Matt Black  
(on request)


### Technical features



### Technical data

Wattage	1 WATT
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 1 x 1W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Nickel-plated brass cable gland PG9
Power cable	1 mt. neoprene power cable included
Gross weight	0,55 Kg

101002 - with EXTENDED FIXING BRACKET OPTION

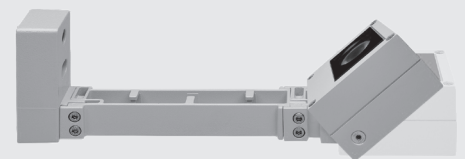

AC001 EARTH SPIKE

