

# HYDROLINE-B SLIGHT 17 35 ARMS/BASE LED

COD 403005

COD 403006

COD 403007


COD 403008

## ASSEMBLY AND OPERATING INSTRUCTIONS:



-Apparecchio in classe I è necessario eseguire un collegamento con messa a terra

-Class I fitting electric grounding is needed



-replace the damaged protective glass  
-sostituire i vetri di protezione se danneggiati  
-die Beschädigten Schutzgläser ersetzen  
-remplacer les verres de protection abimés  
-glass features: plane float glass - safety tempered  
-caratteristiche vetro: vetro piano float di sicurezza temperato  
-Glaseigenschaften: Float-Flachglas, gehärtetes Sicherheitsglas  
-caractéristiques du verre: type de verre: plan<sup>o</sup> float<sup>o</sup> de sûreté trempé



-getting rid of as urban waste forbidden  
-separate collection is mandatory when the product is at the end of its life

-è vietato lo smaltimento come rifiuto urbano  
-è obbligatoria la raccolta separata a fine vita del prodotto

-Das Entsorgen im Hausmüll ist verboten!  
-Bei Ablauf der Lebensdauer bitte beachten:  
-Abfalltrennung ist Pflicht

-il est interdit l'élimination comme ordure urbaine  
-le ramassage séparé est obligatoire lorsque le produit est à la fin de sa vie

**CE** Made in Italy **IP67**



**NB: These assembly instructions must be given to end users for correct maintenance and so that they know how to change the bulb. The appliance must not be tampered with or transformed and it must be installed and used as supplied and in compliance with the National Rules on Installations. Any non-compliant installations will invalidate all forms of guarantee. The company cannot be held responsible for damage caused by incorrect assembly.**

**NOTA BENE: Le presenti istruzioni di montaggio devono obbligatoriamente essere consegnate all'utente finale affinché conosca le corrette modalità di manutenzione e ricambio lampada. È vietata qualsiasi manomissione e/o trasformazione dell'apparecchio che deve essere installato e utilizzato: così come fornito e in conformità alle Norme Impianti Nazionali. Installazioni non conformi fanno decadere ogni forma di garanzia, l'Azienda non risponde dei danni causati da un errato montaggio.**

**N.B. Vorliegende Montageanleitungen müssen auf jeden Fall dem Endverbraucher übergeben werden, damit dieser über die korrekten Wartungs- und Lampenaustauschmodalitäten informiert ist. Jegliches Aufbrechen und/oder Änderung der Leuchte ist verboten. Die Leuchte muss wie geliefert und entsprechend den anlagentechnischen Landesvorschriften montiert und verwendet werden. Nichtentsprechende Installationen führen zum Verfall von jeglicher Garantie. Das Unternehmen übernimmt keine Verantwortung für Schäden, die durch fehlerhafte Montage verursacht sind.**

**N.B.: Remettez obligatoirement ces instructions de montage à l'utilisateur final pour qu'il connaisse les modalités correctes de maintenance et de remplacement d'ampoule. Toute modification et/ou transformation est interdite sur l'appareil, qui doit être installé et utilisé tel qu'il est fourni et conformément aux Normes d'Installation Nationales. Une installation non conforme provoque la déchéance de toutes formes de garantie et la compagnie ne répondra pas des dommages provoqués par un montage erroné.**



### COD. 403005

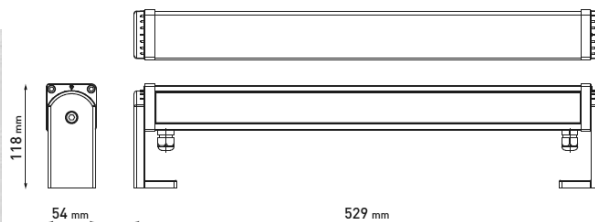

#### HYDROLINE-B SLIGHT 17ARMS LED

-Power consumption : 21W  
-Voltage : 220-240V 50-60Hz  
-Color Temperature : 3000K - 4000K  
-Beam angle : 18°-36°  
-Insulation class: I  
-IP protection: IP67  
-Gross weight: 2.5kg



### COD. 403006

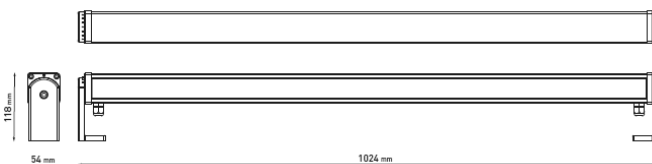

#### HYDROLINE-B SLIGHT 35ARMS LED

-Power consumption : 39W  
-Voltage : 220-240V 50-60Hz  
-Color Temperature : 3000K - 4000K  
-Beam angle : 18° - 36°  
-Insulation class: I  
-IP protection: IP67  
-Gross weight: 4kg

### COD. 403007

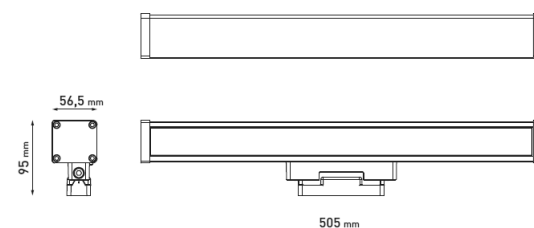



#### HYDROLINE-B SLIGHT 17 BASE LED

-Power consumption : 21W  
-Voltage : 220-240V 50-60Hz  
-Color Temperature : 3000K - 4000K  
-Beam angle : 18°-36°  
-Insulation class: I  
-IP protection: IP67  
-Gross weight: 2.5kg

**COD. 403008**

**HYDROLINE-B SLIGHT 35 BASE LED**

- Power consumption : 39W
- Voltage : 220-240V 50-60Hz
- Color Temperature : 3000K - 4000K
- Beam angle : 18°-36°
- Insulation class: I
- IP protection: IP67
- Gross weight: 4kg

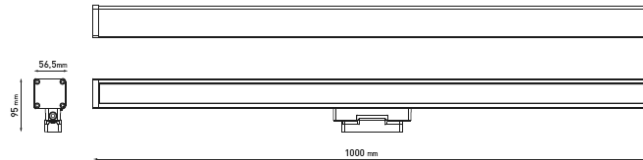

**HYDROLINE SLIGHT ARM LED**

**THE WARRANTY IS FALLING IN THE FOLLOWING CASES:**

- 1) Malfunctions due to improper use of the product, modifications, repairs inadequate, negligence on the part of the installer / electrician, failure to assembly instructions and / or data plate;
- 2) Installations in plants not comply with the general safety;
- 3) Damage caused by natural causes such as lightning, fire or flooding;
- 4) Damage caused by wiring / connections with IP degree lower than the selected product.
- 5) Damage occurring during shipment of the product. In these cases the damage will be to charge and notify the carrier;
- 6) The warranty covers only the integrity of the product and NOT any costs of removal of the same;

**Recommendations**

- 1) verify that the equipment used to connect our devices to enjoy all the guarantees required under European law;
- 2) use the cables, connectors and quality materials for electrical wiring;
- 3) Products with IP67/68 degree make the wiring / connections with accessories provide the same degree IP of the selected product (available in the catalog);
- 4) In the case of installations outside is not recommended to install the power supplies in the formwork and / or in the junction box without adequate protection;

**Choice of installation location**

The unit should be positioned so that when in use is not subject to direct radiation from the sun or other heat sources . High temperatures reduce the life and efficiency of the components or the LED module .

**Installation:**




**-SWITCH-OFF THE POWER SUPPLY BEFORE CARRYING OUT ANY MAINTENANCE OPERATIONS**

- 1) Unscrew two screws on the edge of luminaire to remove the brackets by using the tool in the package. (pic1)
- 2) Choice the correct position of the luminaire close to the feeding point
- 3) Drill a hole in the fixing point using an appropriate plug (not included in the package) see the drawing for the correct distance. (pic 2)
- 4) Fix the bracket of the wall and then lighting fixture by tighten the two hexagonal screws on the edge of luminaire.
- 5) Making the appropriate electrical connection (L-N-PE)
- 6) Positioning the beam of lighting fixture in the desired way (pic3)

The luminaire is supplied by us with LED illuminator already installed with built in SELV power supply.

The cable and the fixture must not be tampered with for any reason.

-it is essential to do a frequent cleaning of the glass and of the outer surface of the fixture to avoid build up of mud and dirtiness resulting in dangerous overheating due to uncorrect light and heat dissipation. Clean carefully the glass screen removing limestone deposits by means of a scraper.

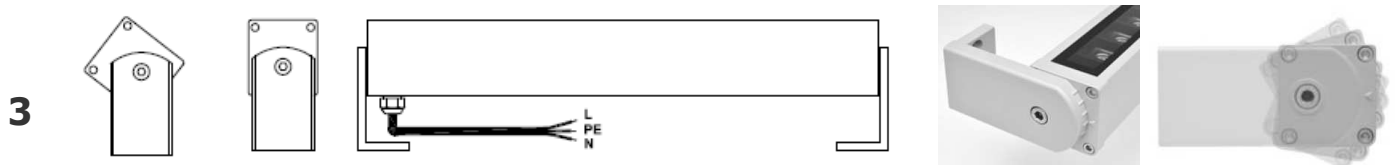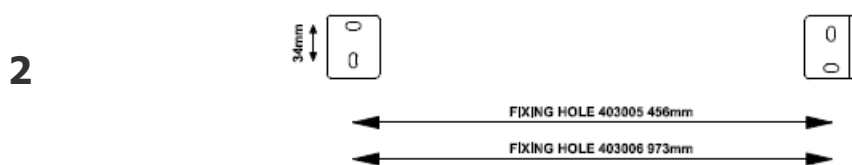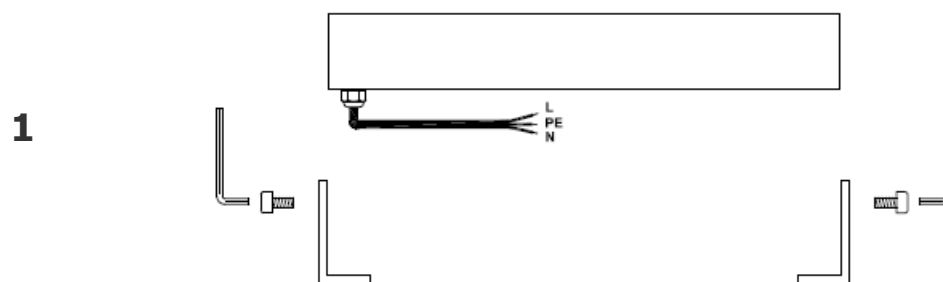

## HYDROLINE SLIGHT BASE LED

### Recommendations

- 1) verify that the equipment used to connect our devices to enjoy all the guarantees required under European law;
- 2) use the cables, connectors and quality materials for electrical wiring;
- 3) Products with IP67/68 degree make the wiring / connections with accessories provide the same degree IP of the selected product (available in the catalog);
- 4) In the case of installations outside is not recommended to install the power supplies in the formwork and / or in the junction box without adequate protection;

### Choice of installation location

The unit should be positioned so that when in use is not subject to direct radiation from the sun or other heat sources . High temperatures reduce the life and efficiency of the components or the LED module .

### Installation:

#### -SWITCH-OFF THE POWER SUPPLY BEFORE CARRYING OUT ANY MAINTENANCE OPERATIONS


- 1) Unscrew two screws on the edge of luminaire to remove the bracket by using the tool in the package. (pic1)
- 2) Choice the correct position of the luminaire close to the feeding point
- 3) Drill a hole in the fixing point using an appropriate plug (not included in the package) see the drawing for the correct distance. (pic 2)
- 4) Fix the bracket of the wall and then lighting fixture by tighten the two hexagonal screws on the edge of luminaire.
- 5) Making the appropriate electrical connection (L-N-PE)
- 6) Positioning the beam of lighting fixture in the desired way (pic3)

The luminaire is supplied by us with LED illuminator already installed with built in SELV power supply.


The cable and the fixture must not be tampered with for any reason.

-it is essential to do a frequent cleaning of the glass and of the outer surface of the fixture to avoid build up of mud and dirtiness resulting in dangerous overheating due to uncorrect light and heat dissipation. Clean carefully the glass screen removing limestone deposits by means of a scraper.

1

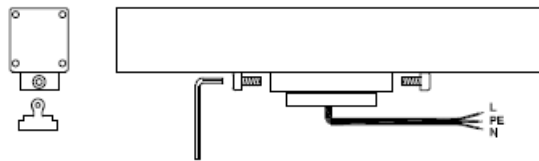

2

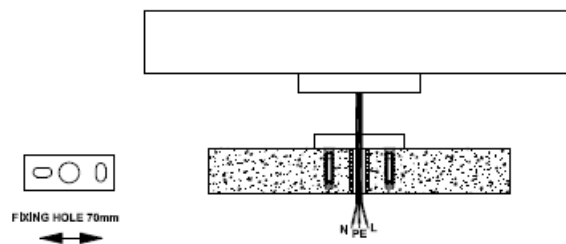

3

