

TARGET 250-500-1000

COD. 406008

COD. 406006

COD. 406007

ASSEMBLY AND OPERATING INSTRUCTIONS:



-very low voltage feeding with security transformer
-Class III no earth required



In the case of glass breakage, contact the device manufacturer to replace it. Replace the screen with an original replacement



-getting rid of as urban waste forbidden
-separate collection is mandatory when the product is at the




Made in Italy



-Retain the instructions


NB: The appliance must not be tampered with or transformed and it must be installed and used as supplied and in compliance with the National Rules on Installations. Any non-compliant installations will invalidate all forms of guarantee. The company cannot be held responsible for damage caused by incorrect assembly.

COD. 406008

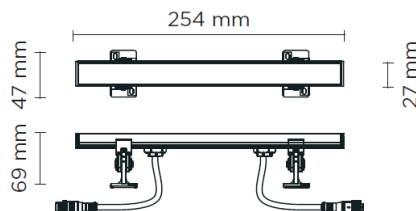


- Power consumption : 3W
- Voltage :24Vdc
- Color Temperature : 3000K
- Lumen output: 510lm
- Lens Type : 40°
- Insulation class: III
- IK 07
- IP protection: IP65
- Gross weight: 0,3kg

COD. 406006

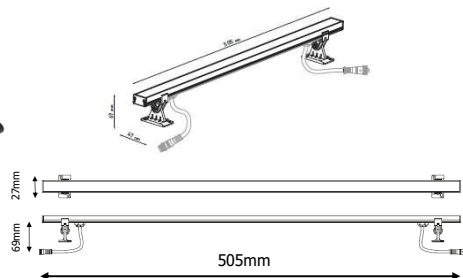

- Power consumption : 6W
- Voltage :24Vdc
- Color Temperature : 3000K
- Lumen output: 510lm
- Lens Type : 40°
- Insulation class: III
- IK07
- IP protection: IP65
- Gross weight: 0,3kg

COD. 406007

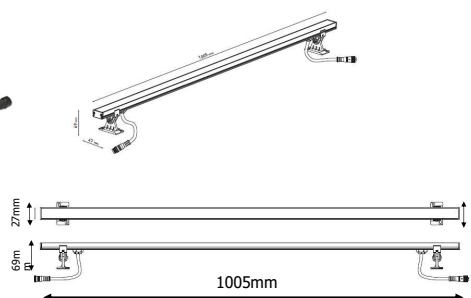

- Power consumption : 12W
- Voltage :24Vdc
- Color Temperature : 3000K
- Lumen output: 1020lm
- Lens Type : 40°
- Insulation class: III
- IK07
- IP protection: IP65
- Gross weight: 0,6kg

THE WARRANTY IS FALLING IN THE FOLLOWING CASES:

- 1) Malfunctions due to improper use of the product, modifications, repairs inadequate, negligence on the part of the installer / electrician, failure to assembly instructions and / or data plate;
- 2) Installations in plants not comply with the general safety;
- 3) Damage caused by natural causes such as lightning, fire or flooding;
- 4) Damage caused by wiring / connections with IP degree lower than the selected product.
- 5) Damage occurring during shipment of the product. In these cases the damage will be to charge and notify the carrier;
- 6) The warranty covers only the integrity of the product and NOT any costs of removal of the same;

Recommendations

- 1) verify that the equipment used to connect our devices to enjoy all the guarantees required under European law;
- 2) use the cables, connectors and quality materials for electrical wiring;
- 3) Products with IP65/68 degree make the wiring / connections with accessories provide the same degree IP of the selected product (available in the catalog);
- 4) In the case of installations outside is not recommended to install the power supplies in the formwork and / or in the junction box without adequate protection;

Note on corrosion protection


For installation and maintenance be especially careful not to damage the coating powder . Damage combined action of water could cause corrosion.

- In the case of damage to the external flexible cable, it must be replaced by the manufacturer, or its assistance service, or equivalent qualified personnel in order to avoid dangers
- In the case of glass breakage, contact the device manufacturer to replace it. Replace the screen with an original replacement
- Do not use water high pressure cleaners

Installation:

- 1) Set the apparatus at the point of supply by making the appropriate electrical connection to the line
- 2) Drill holes in the wall to insert plugs (fischer type) corresponding to the holes located on the base unit.
- 3) Secure the unit by tightening the screws on the plugs.
- 4) Position the beam of lighting fixture in the desired way

ACCESSORIES

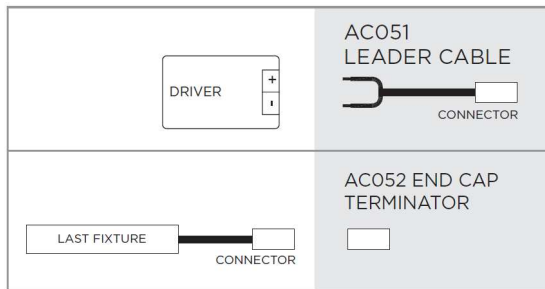

SERIAL CONNECTION SCHEME

