





601201

STICK

680mm height bollard, rectangular shape for outdoor surface installation, with 180° diffused light emission from one side, phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, opaline PMMA diffuser, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 48 low-power LED. Anchorage bolts included. IP65 rating.

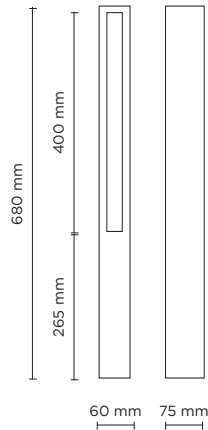

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
low power led	 180°	350	58.34

Finish color options:

 Textured Grey
RAL 9006

Technical features



Technical data

Wattage	6 WATT
IP Rating	IP65
IK Rating	IK07
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 48 x low-power SMD3528 LED
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Diffuser	PMMA diffuser
	Anchorage unit included
Gross weight	3,00 Kg

