

# PERISCOPE 01 02 03

## ASSEMBLY AND OPERATING INSTRUCTIONS:



-Class I fitting electric gruonding is needed



In the case of glass breakage, contact the device manufacturer to replace it. Replace the screen with an original replacement

-COD. 601601  
-COD. 601602  
-COD. 601603  
-COD. 601604  
-COD. 601605  
-COD. 601606



-getting rid of as urban waste forbidden  
-separate collection is mandatory when the product is at the end of its life



Made in Italy


IP65



- GB Retain the instructions.  
I Conservare le istruzioni.  
D Retain the instructions.  
F Bewahren Sie die Anleitung.  
E Conservez ces instructions.

NB: The appliance must not be tampered with or transformed and it must be installed and used as supplied and in compliance with the National Rules on Installations. Any non-compliant installations will invalidate all forms of guarantee. The company cannot be held responsible for damage caused by incorrect assembly.


### COD. 601601-02

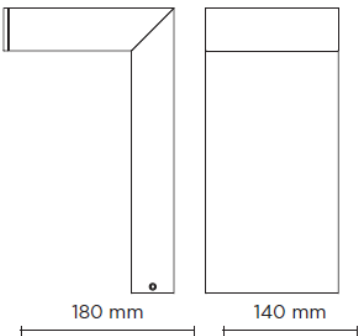

#### PERISCOPE 01

- Power consumption Cod. 601601 : 7W
- Power consumption Cod. 601602 : 14W
- Voltage : 220-240V 50-60Hz
- Color Temperature : 3000K - 4000K
- Beam angle : Asymmetric
- Insulation class: I
- IK rating : IK10
- IP protection: IP65
- Gross weight: 3.5kg


### COD. 601603-04

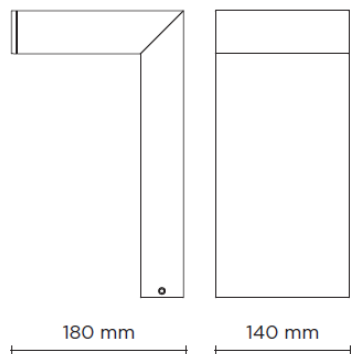

#### PERISCOPE 02

- Power consumption Cod. 601603 : 7W
- Power consumption Cod. 601604 : 14W
- Voltage : 220-240V 50-60Hz
- Color Temperature : 3000K - 4000K
- Beam angle : Asymmetric
- Insulation class: I
- IK rating : IK10
- IP protection: IP65
- Gross weight: 4.5kg

### COD. 601605-06

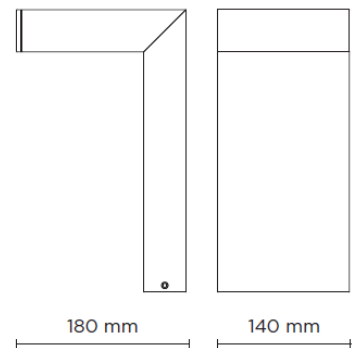

#### PERISCOPE 03

- Power consumption Cod. 601605 : 7W
- Power consumption Cod. 601606 : 14W
- Voltage : 220-240V 50-60Hz
- Color Temperature : 3000K - 4000K
- Beam angle : Asymmetric
- Insulation class: I
- IK rating : IK10
- IP protection: IP65
- Gross weight: 5.5kg

## Recommendations

- 1) verify that the equipment used to connect our devices to enjoy all the guarantees required under European law;
- 2) use the cables, connectors and quality materials for electrical wiring;
- 3) Products with IP65 degree make the wiring / connections with accessories provide the same degree IP of the selected product (available in the catalog);
- 4) In the case of installations outside is not recommended to install the power supplies in the formwork and / or in the junction box without adequate protection


## Note on corrosion protection

For installation and maintenance be especially careful not to damage the coating powder . Damage combined action of water could cause corrosion.

-In the case of damage to the external flexible cable, it must be replaced by the manufacturer, or its assistance service, or equivalent qualified personnel in order to avoid dangers

-In the case of glass breakage, contact the device manufacturer to replace it. Replace the screen with an original replacement

-Terminal block not included. Installation may require advice from a qualified person. For wiring use a terminal complies with EN60998-2-1, EN 60998-2-2. The IP rating of the electrical connection must be equal to or greater than the IP rating of the luminaire.

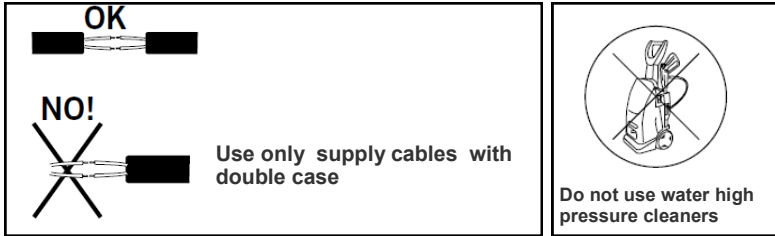

## Installation

1. Loose the three grub-screws in the base of the luminaire and remove the fixing plate pic.1
2. Mount the top head of the luminaire tighten the two screws in the package pic 2
3. Prepare holes in corispondance of the feeding point using fischer plugs pic. 3
4. Fix the base to the floor by tighten the screws of the fischer plugs pic. 4-5
5. Insert the cable through the base hole pic. 6
6. Make the adequate electrical connection pic. 7
7. Place the luminaire by tighten the two grub-screws using the tool included in the package pic. 8

