




101903RGBW

# NANOSPOT MINI RGBW

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. Remote 24V DC power supply needed, remote DMX interface needed; with 1 x CREE "XML" RGBW LED. IP66 rating.

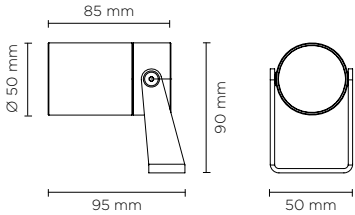

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>RGBW</b>			
high-power led	12°	160	35.55
high-power led	25°	152	33.78
high-power led	35°	145	32.23

**Finish color options:**

- Textured Grey  
RAL 9006
- Anthracite Grey  
RAL 7016
- Matt Black  
(on request)

**DMX ACCESSORIES CONTROLLERS, SPLITTERS, ETC...**

To be defined together with puk technical department, according to project specifications and after providing installation details.

**Technical features**

- IP66
- IK09
- CE
- 5 YEARS
- III
- DMX



**Available on request**



**Technical data**

Wattage	4.5 WATT
IP Rating	IP66
IK Rating	IK09
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x CREE XM-L RGBW LED
Screws	Stainless steel
Remote driver	Constant voltage 24V DC
DMX interface	not included
Gasket	Silicone rubber
Glass	Tempered
Power cable	1,5 mt. power cable included
Gross weight	0,60 Kg

## OTHER VIEW




## OPTIONAL

AC044  
SPIKE



AC095  
HONEYCOMB LOUVER



AC038  
TREE STRAP



AC098  
ANTI-GLARE SNOOT



## ACCESSORIES

### AC100 PIPE L 300 mm

Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

### AC101 PIPE L 600 mm

Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

### AC102 PIPE L 900 mm

Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.



### remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
Meanwell	LPV-20-24	Constant voltage 24C DV	20W	IP67	min 1 - max 3
Meanwell	LPV-35-24	Constant voltage 24C DV	35W	IP67	min 1 - max 6