




101904

## NANOSPOT MEDIUM COB

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 57C" COB LED. IP66 rating.

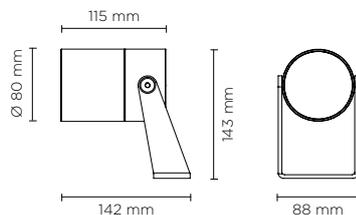

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	20°	1.000	66.67
cob led	40°	980	65.34
<b>4000°K neutral-white</b>			
cob led	20°	1.050	70.00
cob led	40°	1.030	68.67

**2700°K CCT** available on request

### Finish color options:

Textured Grey  
RAL 9006

Anthracite Grey  
RAL 7016

Matt Black  
(on request)

### Technical features

IP66

IK09

CE

5  
YEARS

⊕

### Technical data

Wattage	15 WATT
IP Rating	IP66
IK Rating	IK09
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x LUMENS "EDC 57C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1,5 mt. power cable included
Gross weight	1,50 Kg

## OTHER VIEW




## OPTIONAL

AC044  
SPIKE



AC096  
HONEYCOMB LOUVER



AC038  
TREE STRAP



AC099  
ANTI-GLARE SNOOT



**AC100** PIPE L 300 mm

Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

**AC101** PIPE L 600 mm


Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

**AC102** PIPE L 900 mm

Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.



AC100

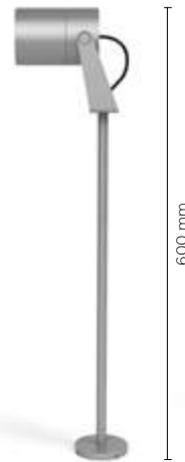

AC101



AC102

300 mm

600 mm

900 mm