




602301

## COINY BOLLARD

Projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 38C" COB LED. IP66 rating.

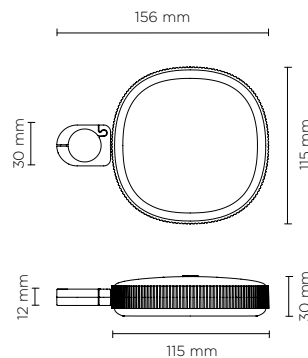


light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	M 18°	400	50.00
cob led	M 36°	390	48.75
cob led	M 60°	375	46.88
<b>4000°K neutral-white</b>			
cob led	M 18°	410	51.25
cob led	M 36°	400	50.00
cob led	M 60°	385	48.13

**2700°K CCT** available on request

### Finish color options:



### Technical features



### Technical data

Wattage	8 WATT
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminium body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x LUMENS "EDC 38C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,20 Kg



AC112

PIPE L 500 mm + BASE



Extension pipe length 500 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.



AC113

PIPE L 1000 mm + BASE

Extension pipe length 1.000 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.

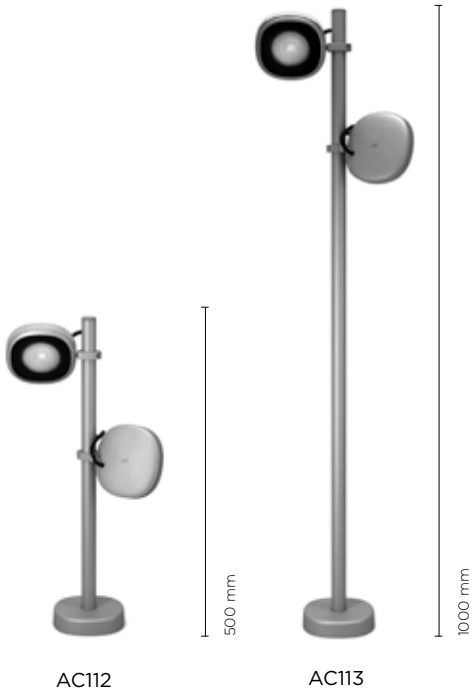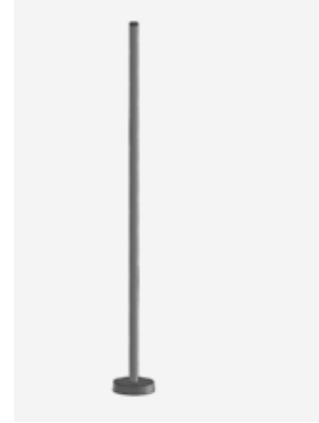

## OPTIONAL

AC044  
SPIKE



AC111  
VISOR



AC0110  
HONEYCOMB LOUVER

