




102101

**COINY**

Projector for outdoor installation on a façade/ wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 38C" COB LED. IP66 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	18°	400	50.00
cob led	36°	390	48.75
cob led	60°	375	46.88
<b>4000°K neutral-white</b>			
cob led	18°	410	51.25
cob led	36°	400	50.00
cob led	60°	385	48.13

**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

**Technical features**



**Technical data**

Wattage	8 WATT
IP Rating	IP66
IK Rating	08
Material	high corrosion resistance die-cast copper-free aluminum body
Coating	polyester powder coating with phosphochromating pre-finish
Light source	1 x LUMENS "EDC 38C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,20 Kg

AC0110 HONEYCOMB LOUVER



AC044 SPIKE



AC111 VISOR








602301

# COINY BOLLARD

Designed by  
NAVA + AROSIO

Projector for outdoor installation on a façade/ wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 38C" COB LED. IP66 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	18°	400	50.00
cob led	36°	390	48.75
cob led	60°	375	46.88
<b>4000°K neutral-white</b>			
cob led	18°	410	51.25
cob led	36°	400	50.00
cob led	60°	385	48.13

**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

**Technical features**



**Technical data**

Wattage	8 WATT
IP Rating	IP66
IK Rating	O8
Material	High corrosion resistance die-cast copper-free aluminium body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x LUMENS "EDC 38C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,20 Kg





AC112

**PIPE L 500 mm + BASE**


Extension pipe length 500 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.



AC113

**PIPE L 1000 mm + BASE**

Extension pipe length 1.000 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.

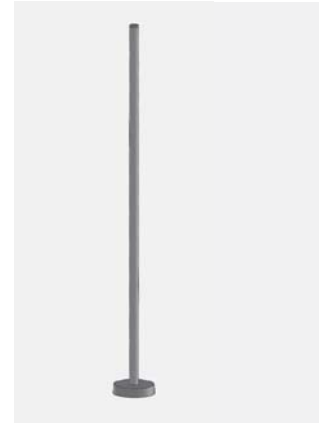

## OPTIONAL

AC044  
SPIKE



AC111  
VISOR



AC0110  
HONEYCOMB LOUVER

