


101102

FLASH MEDIUM COB

Round floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 1 CREE CXA 1512 COB LED. IP65 rating.

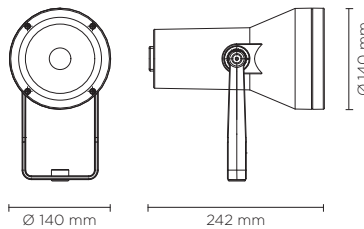

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| cob led | M 35° | 1.530 | 85.00 |
| 4000°K neutral-white | | | |
| cob led | M 35° | 1.700 | 94.44 |
| 2700°K CCT available on request | | | |

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)

Technical features



Available on request



Technical data

| | |
|--------------|--|
| Wattage | 18 WATT |
| IP Rating | IP65 |
| IK Rating | IK09 |
| Material | High corrosion resistance die-cast copper-free aluminum body |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Light source | NR. 1 CREE CXA 1512 LED |
| Screws | Stainless steel |
| Transformer | Electronic power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable gland | Double nickel-plated brass cable gland PG11 |
| Power cable | 1 mt. neoprene power cable included |
| Gross weight | 2,60 Kg |

AC-026 Anti-glare visor for hydroflash medium



Graduated stainless steel insert

