










101405

RING MEDIUM HP

Designed by
NAVA + AROSIO

Floodlight for outdoor installation on a façade/wall, with 355° swivel base and allowing horizontal adjustment of +90° / -40°. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium base and head, tempered safety glass, moulded silicone gaskets and o-rings, with screws in stainless steel. Swivel joint with graduated scale and mechanical aiming lock. Built-in LED driver, with 3 x CREE "XHP35" LED. IP66 rating.



light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		4°	2.050	102.50
high-power led		10°	2.000	100.00
high-power led		28°	1.950	97.50
4000°K neutral-white				
high-power led		4°	2.100	105.00
high-power led		10°	2.050	102.50
high-power led		28°	2.000	100.00
2700°K CCT available on request				

Finish color options:



Technical features



Available on request



Technical data


Wattage	20 WATT
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	3 x CREE "XHP35" LED
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	2,50 Kg

OTHER VIEW




OPTIONAL

- | | | | |
|----------------|------------------------------|--|------------------------------|
| AC044
SPIKE | AC049
HONEYCOMB
LOUVER | AC038
TREE STRAP
FOR RING SERIES | AC046
ANTI-GLARE
VISOR |
|----------------|------------------------------|--|------------------------------|

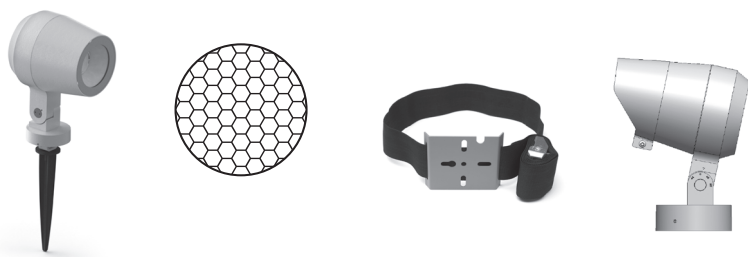

OPTIONAL LIGHT DISTRIBUTIONS

These optional light distributions are obtained with special glass diffusers, product must be ordered as per light distribution requirement and these optics are not interchangeable

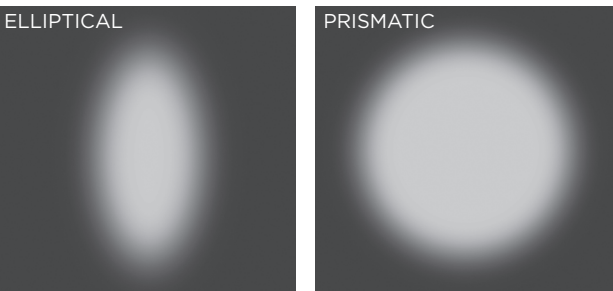

OPTIONAL

LUMINAIRE SUITABLE FOR POLE MOUNTING
IN SINGLE OR MULTIPLE COMBINATIONS

AC085 - POLE PLATE

Pole plate for pole mounting of all Ring models, suitable to be used with poles diam. min 76 mm and diam. max 120 mm. Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho-chromatised and polyester powder coated dia-cast copper-free aluminum material, moulded silicone gaskets and screws in stainless steel.

