




101903

## NANOSPOT MINI HP

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. Constant current max 700mA remote driver needed. With 1 x CREE XHP35 LED. IP66 rating.

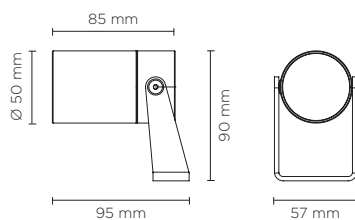

### 350 mA - LED POWER 5W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	4°	510	102.00
high-power led	10°	489	97.80
high-power led	28°	474	94.80
<b>4000°K neutral-white</b>			
high-power led	4°	520	104.00
high-power led	10°	499	99.80
high-power led	28°	484	96.80
<b>2700°K CCT</b> available on request			

### Finish color options:

 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matt Black  
(on request)

### Technical features

IP66

IK09

CE

5  
YEARS















Full  
RGB

### Technical data

Wattage	MAX 10 WATT
IP Rating	IP66
IK Rating	IK09
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x CREE XHP35 LED
Screws	Stainless steel
Remote driver	Constant current max 700mA
Gasket	Silicone rubber
Glass	Tempered
Power cable	1,5 mt. power cable included
Gross weight	0,60 Kg



500 mA – LED POWER 7W				
light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		4°	690	98.57
high-power led		10°	662	94.57
high-power led		28°	642	91.71
4000°K neutral-white				
high-power led		4°	703	100.43
high-power led		10°	676	96.57
high-power led		28°	656	93.71


700 mA - LED POWER 10W				
light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		4°	907	90.69
high-power led		10°	872	87.20
high-power led		28°	846	84.60
4000°K neutral-white				
high-power led		4°	930	93.00
high-power led		10°	890	89.00
high-power led		28°	863	86.30

## ACCESSORIES


AC100	PIPE L 300 mm
Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.	

AC101	PIPE L 600 mm
Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.	


AC102	PIPE L 900 mm
Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.	



AC100

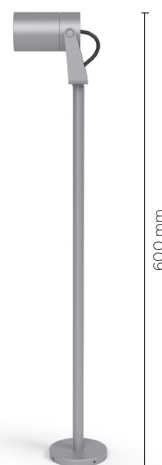

AC101

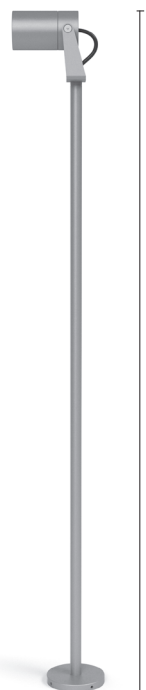


AC102

## OPTIONAL

AC044  
SPIKE




AC095  
HONEYCOMB LOUVER



AC038  
TREE STRAP



AC098  
ANTI-GLARE SNOOT



remote driver selection					
brand	manufacturer code	type	watt	IP rate	numbers of fixtures
ALVIT Italy	AL1435S-IP	Constant current 350mA	14W	IP67	min 1 - max 2
ALVIT Italy	AL1450S-IP	Constant current 500mA	14W	IP67	1
ALVIT Italy	AL1470S-IP	Constant current 700mA	14W	IP67	1
TCI Italy	152014/350	Constant current 350mA	17W	IP68	min 1 - max 3
TCI Italy	152014/500	Constant current 500mA	24W	IP68	min 1 - max 3
TCI Italy	152014/700	Constant current 700mA	30W	IP68	min 1 - max 3