




209001

HYDROFLOOR NANO LINEAR HP

Linear shape ground-recessed luminaire for outdoor installation. Body in hard anodized aluminum with phosphochromatised and polyester powder coating and frontal cover in stainless steel AISI 316L, tempered safety glass. Remote constant current max 700mA driver needed, with 3 CREE XP-G2 LED. IP68 rating.

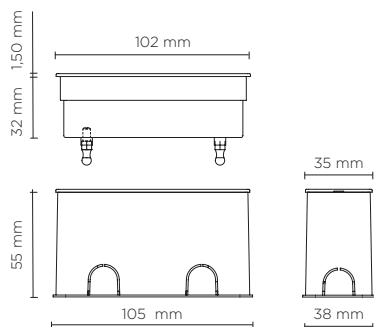

350 mA - LED POWER 3W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	8°	300	100.00
high-power led	32°	287	95.80
high-power led	45°	278	92.80
3000°K warm-white			
high-power led	8°	306	102.00
high-power led	32°	293	97.80
high-power led	45°	284	94.80
4000°K neutral-white			
high-power led	8°	312	104.00
high-power led	32°	300	99.80
high-power led	45°	290	96.80

Finish color options:



Stainless Steel

Technical features

IP68

IK08

CE

5 YEARS

III

3000

NEW

Technical data

Wattage	MAX 6 WATT
IP Rating	IP68
IK Rating	IK08
Material	Hard anodized aluminum
Trim	Stainless steel AISI 316L
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	3 x CREE XP-G2 LED
Screws	Stainless steel
Remote driver	Constant current max 700mA
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	0,50 Kg



AC125
HONEYCOMB LOUVER

