

403205

# WALLBOX MINI HP 02

Wall applique for outdoor wall installation, with up&down light distribution. Luminaire body is made of extruded copper-free aluminum, secured with die-cast aluminum base, tempered safety glass and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with nr. 10 CREE XP-G3 LED. IP66 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	11°	2x550	78.57
high-power led	30°	2x525	75.00
high-power led	60°	2x500	71.43
high-power led	45°x10°	2x520	74.28
<b>3000°K warm-white</b>			
high-power led	11°	2x560	80.00
high-power led	30°	2x535	76.43
high-power led	60°	2x510	72.86
high-power led	45°x10°	2x530	75.72
<b>4000°K neutral-white</b>			
high-power led	11°	2x570	81.43
high-power led	30°	2x545	77.86
high-power led	60°	2x520	74.28
high-power led	45°x10°	2x540	77.14

Combination of different optics are possible, on request


**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

**Technical features**



**Available on request**

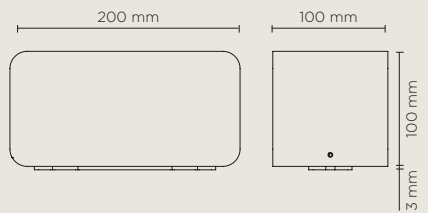

**Technical data**

Wattage	14 WATT
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance extruded copper-free aluminium
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	10 x CREE XP-G3 LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Glass	Tempered
Power cable	0,5 mt. power cable included
Gross weight	1,70 Kg

