

403207

WALLBOX MINI ASYMMETRIC 02

Wall applique for outdoor wall installation, with up&down light distribution. Luminaire body is made of extruded copper-free aluminum, secured with die-cast aluminum base, tempered safety glass and stainless steel screws. Asymmetrical wide light distribution. Built-in LED driver 220-240V 50-60Hz, with 40 x mid-power SAMSUNG 2835 LED. IP66 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
mid-power led	ASYMMETRIC FORWARD 110°x70°	2x560	70.00
mid-power led	ASYMMETRIC BACKWARD 110°x70°	2x560	70.00
3000°K warm-white			
mid-power led	ASYMMETRIC FORWARD 110°x70°	2x570	71.25
mid-power led	ASYMMETRIC BACKWARD 110°x70°	2x570	71.25
4000°K neutral-white			
mid-power led	ASYMMETRIC FORWARD 110°x70°	2x590	73.75
mid-power led	ASYMMETRIC BACKWARD 110°x70°	2x590	71.25

Combinations of asymmetric forward and asymmetric backward light distributions or asymmetric and symmetric light distributions are possible, on request.

Finish color options:

■ Textured Grey
RAL 9006

■ Anthracite Grey
RAL 7016

■ Matt Black
(on request)

Technical features

IP66

IK08

CE


5
YEARS

⊕

NEW

Available on request

DALI

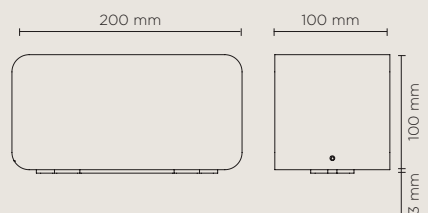

Technical data

Wattage	16 WATT
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance extruded copper-free aluminium
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	40 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Glass	Tempered
Power cable	0,5 mt. power cable included
Gross weight	1,70 Kg

