

403208

WALLBOX MINI DIFFUSED 02

Wall applique for outdoor wall installation, with up&down light distribution. Luminaire body is made of extruded copper-free aluminum, secured with die-cast aluminum base, tempered safety glass and stainless steel screws. Diffused light distribution. Built-in LED driver 220-240V 50-60Hz, with 40 x mid-power SAMSUNG 2835 LED. IP66 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
mid-power led	DIFFUSED	2x200	25.00
3000°K warm-white			
mid-power led	DIFFUSED	2x210	26.25
4000°K neutral-white			
mid-power led	DIFFUSED	2x220	27.50

Finish color options:

Textured Grey
RAL 9006


Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical features



Available on request

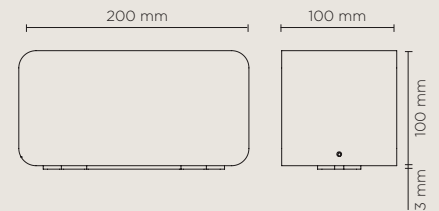

Technical data

Wattage	16 WATT
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance extruded copper-free aluminium
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	40 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Glass	Tempered
Power cable	0,5 mt. power cable included
Gross weight	1,70 Kg

