




505004

NANOSTEP LINEAR

Linear shape wall-recessed luminaire for outdoor installation. Body and frontal cover in hard anodized aluminum with phospho-chromatised and polyester powder coating, tempered safety glass, moulded silicone gasket. Asymmetrical oval wide light distribution. Remote constant current max 700mA driver needed, with 3 CREE XP-G2 LED. IP68 rating.

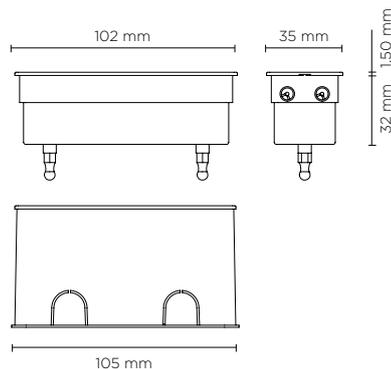

Technical features



Technical data

Wattage	MAX 6 WATT
IP Rating	IP68
IK Rating	IK08
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	3 x CREE XP-G2 LED
Screws	Stainless steel
Remote driver	Constant current max 700mA
Glass	Tempered
Power cable	0.3 mt. power cable included
Gross weight	0,50 Kg

350 mA - LED POWER 3W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	 10°x45° ELLIPTICAL	278	92.80
3000°K warm-white			
high-power led	 10°x45° ELLIPTICAL	284	94.80
4000°K neutral-white			
high-power led	 10°x45° ELLIPTICAL	290	96.80

Finish color options:



500 mA - LED POWER 4.5W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	 10°x45° ELLIPTICAL	350	77.75
3000°K warm-white			
high-power led	 10°x45° ELLIPTICAL	360	80.25
4000°K neutral-white			
high-power led	 10°x45° ELLIPTICAL	369	82.00


700 mA - LED POWER 6W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	 10°x45° ELLIPTICAL	501	83.60
3000°K warm-white			
high-power led	 10°x45° ELLIPTICAL	507	84.60
4000°K neutral-white			
high-power led	 10°x45° ELLIPTICAL	518	86.30

505005

NANOSTEP LINEAR TRIMLESS

Trimless version, all other details are same as model 505004

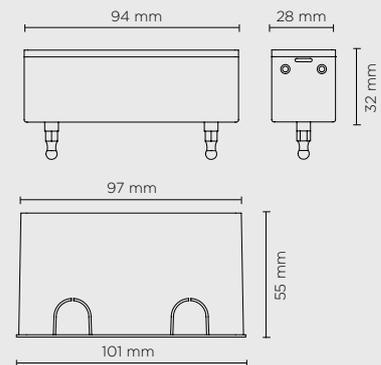

remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
ALVIT Italy	AL1435S-IP	constant current 350mA	14W	IP67	min 1 - max 4
ALVIT Italy	AL1450S-IP	constant current 500mA	14W	IP67	min 1 - max 3
ALVIT Italy	AL1470S-IP	constant current 700mA	14W	IP67	min 1 - max 2
TCI Italy	152014/350	constant current 350mA	17W	IP68	min 1 - max 5
TCI Italy	152014/500	constant current 500mA	24W	IP68	min 1 - max 5
TCI Italy	152014/700	constant current 700mA	30W	IP68	min 1 - max 4