



807003 - 807006

# RING POLE MAXI

Designed by  
NAVA + AROSIO

Floodlight for outdoor installation on a pole diam. 60 mm or 76 mm, with 355° swivel pole attachment and allowing horizontal adjustment of +90° / -40°. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium base and head, tempered safety glass, moulded silicone gaskets and o-rings, with screws in stainless steel. Swivel pole joint with graduated scale and mechanical aiming lock. Built-in LED driver, with 1 COB CREE "CXB 2540" LED. IP66 rating.

| 807003                                 | SINGLE RING POLE MAXI - 42 WATT 220-240V 50-60HZ |                   |                        |
|--|--|-------------------|------------------------|
| light source                           | light beam options                               | lumen output (lm) | lumin. efficacy (lm/w) |
| <b>3000°K warm-white</b>               |  |                   |                        |
| cob led                                | 14°  | 4.950             | 117.85                 |
| cob led                                | 35°  | 4.752             | 113.14                 |
| cob led                                | 55°  | 4.560             | 108.57                 |
| <b>4000°K neutral-white</b>            |  |                   |                        |
| cob led                                | 14°  | 5.265             | 125.36                 |
| cob led                                | 35°  | 5.000             | 119.05                 |
| cob led                                | 55°  | 4.770             | 113.57                 |
| <b>2700°K CCT available on request</b> |  |                   |                        |

## Technical features



## Available on request





## Technical data

|             |  |
|-------------|--|
| IP Rating   | IP66   |
| IK Rating   | IK10   |
| Material    | High corrosion resistance die-cast copper-free aluminum body |
| Coating     | Polyester powder coating with phosphochromating pre-finish   |
| Screws      | Stainless steel  |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in            |
| Gasket      | Silicone rubber  |
| Glass       | Tempered   |
| Cable gland | M16 rubber grommet   |
| Power cable | 3 Mt. Power cable included                                   |



## Technical data

|              |                           |
|--------------|---------------------------|
| Wattage      | 42 WATT                   |
| Light source | 1 COB CREE "CXB 2540" LED |
| Gross weight | 4,50 Kg                   |



## Colors options



807006


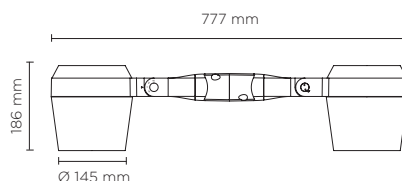
DOUBLE RING POLE MAXI - 2X42 WATT 220-240V 50-60HZ

| light source                | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| <b>3000°K warm-white</b>    |                    |                   |                        |
| cob led                     | 14°                | 2 x 4.950         | 117.85                 |
| cob led                     | 35°                | 2 x 4.752         | 113.14                 |
| cob led                     | 55°                | 2 x 4.560         | 108.57                 |
| <b>4000°K neutral-white</b> |                    |                   |                        |
| cob led                     | 14°                | 2 x 5.265         | 125.36                 |
| cob led                     | 35°                | 2 x 5.000         | 119.05                 |
| cob led                     | 55°                | 2 x 4.770         | 113.57                 |

**2700°K CCT** available on request

**Technical data**

|              |                              |
|--------------|------------------------------|
| Wattage      | 2X42 WATT                    |
| Light source | 2 COB CREE<br>"CXB 2540" LED |
| Gross weight | 8,50 Kg                      |

**Colors options**

Textured Grey  
RAL 9006

Anthracite Grey  
RAL 7016

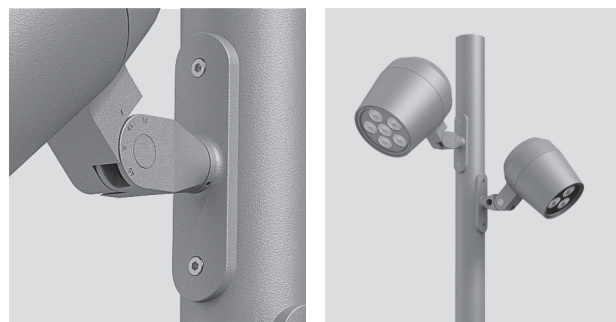
Matt Black  
(on request)

**DIFFERENT POSSIBILITIES AS MULTIPLE APPLICATION ON THE SAME POLE:**

LUMINAIRE SUITABLE FOR POLE MOUNTING  
IN SINGLE OR MULTIPLE COMBINATIONS

**AC085 - POLE PLATE**

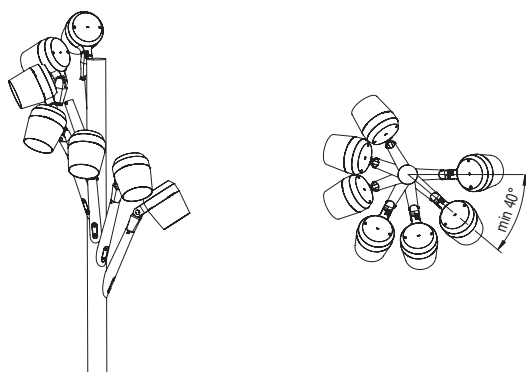
Pole plate for pole mounting of all Ring models, suitable to be used with poles diam. min 76 mm and diam. max 120 mm. Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho-chromatised and polyester powder coated dia-cast copper-free aluminum material, moulded silicone gaskets and screws in stainless steel.

**AC088 - TREE-BRANCH BRACKET**

Special bracket for Ring Maxi pole mounting, suitable to be used with poles diam. min 76 mm and diam. max 120 mm. Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho-chromatised and polyester powder coated dia-cast copper-free aluminum material, moulded silicone gaskets and screws in stainless steel.

**On various staggered levels**

Min. angle between luminaire heads **40°**

**On a single level**

Min. angle between luminaire heads **80°**

