

Nanowall


WALL MOUNTING

The new face of miniaturization. Starting from a diameter of 34mm, NANOWALL has been developed with the aim of bringing the power of the most performing lighting products in a tiny wall application. Highly profiled technology and circular or squared design create a true micro-jewel.





NANOWALL ROUND

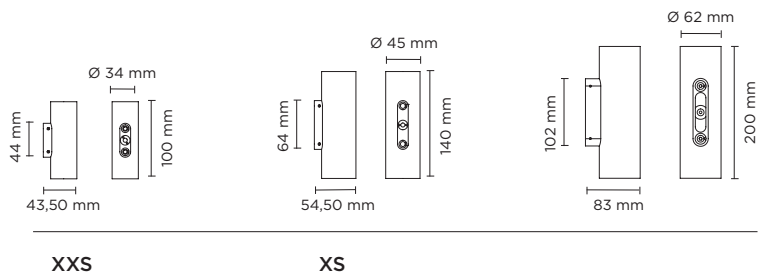

XXS

XS



403101
COB 01



403102
COB 02



403105
XXS 01



403107
XS 01



403103
HP 01



403106
XXS 02



403108
XS 02



403104
HP 02

Material

Hard anodized aluminum

Coating

Polyester powder coating with phosphochromating pre-finish

Screws

Stainless steel

Glass

Tempered

Led colour temperature

2700°K
3000°K
4000°K

Wattage

MAX 2x10 WATT

Rating

IP66 | IK09

Available finishes



RAL 9006 Textured Grey



RAL 7016 Anthracite Grey




Matt Black







NANOWALL SQUARE

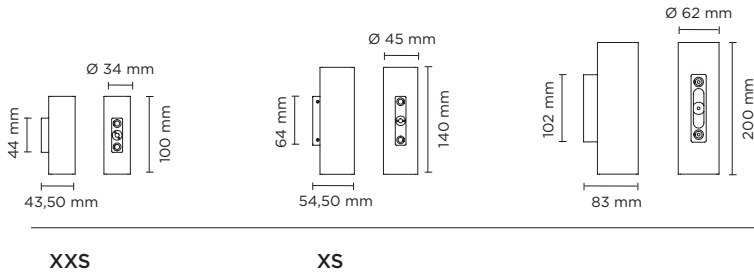

XXS

XS



403113
COB 01



403114
COB 02



403109
XXS 01



403111
XS 01



403115
HP 01



403110
XXS 02



403112
XS 02



403116
HP 02

Material

Hard anodized aluminum

Coating

Polyester powder coating with phosphochromating pre-finish

Screws

Stainless steel

Glass

Tempered

Led colour temperature

3000°K
4000°K
2700°K available on request

Wattage

MAX 2x10 WATT

Rating

IP66 | IK08

Available finishes

 RAL 9006 Textured Grey

 RAL 7016 Anthracite Grey

 Matt Black





