


201101 - 201105 - 201109 - 201113

## LINEAGROUND HP

Linear shape ground-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



201101



201105



201109



201113

### Technical features



Available on request



### Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request





201101		LINEAGROUND 300 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	900	75.00	
high-power led	35°	870	72.50	
high-power led	55°	840	70.00	
high-power led	Asymmetric Wall-Washer	870	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	930	77.50	
high-power led	35°	900	75.00	
high-power led	55°	870	72.50	
high-power led	Asymmetric Wall-Washer	900	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	960	80.00	
high-power led	35°	930	77.50	
high-power led	55°	900	75.00	
high-power led	Asymmetric Wall-Washer	930	77.50	

**Finish color options:**

■ Matt Black




201105		LINEAGROUND 600 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	1800	75.00	
high-power led	35°	1740	72.50	
high-power led	55°	1680	70.00	
high-power led	Asymmetric Wall-Washer	1740	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	1860	77.50	
high-power led	35°	1800	75.00	
high-power led	55°	1740	72.50	
high-power led	Asymmetric Wall-Washer	1800	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	1920	80.00	
high-power led	35°	1860	77.50	
high-power led	55°	1800	75.00	
high-power led	Asymmetric Wall-Washer	1860	77.50	


**Finish color options:**

■ Matt Black

LUMINAIRE



RECESS HOUSING




**Technical data**

Class	⊕
Wattage	12 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	3,00 Kg

LUMINAIRE



RECESS HOUSING

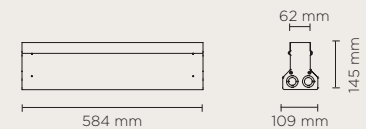

**Technical data**

Class	⊕
Wattage	24 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	5,50 Kg




201109		LINEAGROUND 900 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	2.700	75.00	
high-power led	35°	2.610	72.50	
high-power led	55°	2.520	70.00	
high-power led	Asymmetric Wall-Washer	2.610	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	2.790	77.50	
high-power led	35°	2.700	75.00	
high-power led	55°	2.610	72.50	
high-power led	Asymmetric Wall-Washer	2.700	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	2.880	80.00	
high-power led	35°	2.790	77.50	
high-power led	55°	2.700	75.00	
high-power led	Asymmetric Wall-Washer	2.790	77.50	


**Finish color options:**

■ Matt Black

LUMINAIRE



RECESS HOUSING

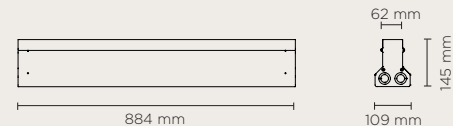

**Technical data**

Class	⊕
Wattage	36 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	7,00 Kg




201113		LINEAGROUND 1200 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	3.600	75.00	
high-power led	35°	3.480	72.50	
high-power led	55°	3.360	70.00	
high-power led	Asymmetric Wall-Washer	3.480	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	3.720	77.50	
high-power led	35°	3.600	75.00	
high-power led	55°	3.480	72.50	
high-power led	Asymmetric Wall-Washer	3.600	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	3.840	80.00	
high-power led	35°	3.720	77.50	
high-power led	55°	3.600	75.00	
high-power led	Asymmetric Wall-Washer	3.720	77.50	


**Finish color options:**

■ Matt Black

LUMINAIRE



RECESS HOUSING

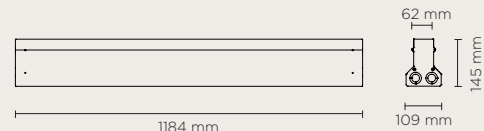

**Technical data**


Class	⊕
Wattage	48 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	9,50 Kg

## ACCESSORIES

AC132-300

**MICROLOUVRE 300**


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

**MICROLOUVRE 600**


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

**MICROLOUVRE 900**


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

**MICROLOUVRE 1200**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

**FEED CABLE 1 MT. ON/OFF**

Initial cable 3 core, to start an in-line installation, cable length 1 meter.  
Open wires for mains connection and IP68 connector for fixture connection.



AC134

**FEED CABLE 1 MT. DALI**

Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter.  
Open wires for mains connection and IP68 connector for fixture connection.



AC135

**JUMPER CABLE 2 MT. ON/OFF**

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

**JUMPER CABLE 2 MT. DALI**


2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

**JUMPER CABLE 4 MT. ON/OFF**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

**JUMPER CABLE 4 MT. DALI**

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

**END CAP ON/OFF**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

**END CAP DALI**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).

