



201104 - 201108 - 201112 - 201116

LINEAGROUND DIFFUSED

Linear shape ground-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



201104



201108



201112



201116

Technical features




NEW

Available on request



Technical data


IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request

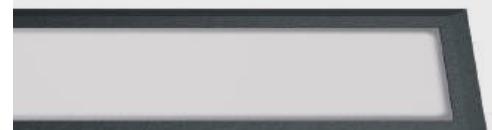

LUMINAIRE



RECESS HOUSING



201104 LINEAGROUND 300 DIFFUSED

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	300	37.50
3000°K warm-white			
high-power led	DIFFUSED	310	38.75
4000°K neutral-white			
high-power led	DIFFUSED	330	41.25


Finish color options:

Matt Black


Technical data

Class	
Wattage	8 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	3,00 Kg

LUMINAIRE



RECESS HOUSING



201108 LINEAGROUND 600 DIFFUSED

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	500	41.66
3000°K warm-white			
high-power led	DIFFUSED	520	43.33
4000°K neutral-white			
high-power led	DIFFUSED	550	45.83


Finish color options:

Matt Black



Technical data

Class	
Wattage	12 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	5,50 Kg

LUMINAIRE



RECESS HOUSING



201112	LINEAGROUND 900 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	780	45.88
3000°K warm-white			
high-power led	DIFFUSED	800	47.06
4000°K neutral-white			
high-power led	DIFFUSED	830	48.80


Finish color options:

Matt Black



Technical data

Class	
Wattage	17 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	7,00 Kg

LUMINAIRE



RECESS HOUSING



201116	LINEAGROUND 1200 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	1.010	42.08
3000°K warm-white			
high-power led	DIFFUSED	1.050	43.75
4000°K neutral-white			
high-power led	DIFFUSED	1.100	45.83

Finish color options:

Matt Black

Technical data

Class	
Wattage	24 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	9,50 Kg

ACCESSORIES

AC133

FEED CABLE 1 MT. ON/OFF

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

JUMPER CABLE 2 MT. DALI

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT. ON/OFF

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).

