



403302 - 403306 - 403310 - 403314

## LINEAFACADE HP DMX RGBW

Linear shape luminaire for outdoor installation, surface mounted on a façade/wall with brackets, four available lengths (290mm, 580mm, 880mm, 1180mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets. Built-in LED driver 220-240V 50-60Hz (except for smaller length 290mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with RGBW(3000K) 3535 LED. IP67 rating.



403302



403306




403310



403314

### Technical features

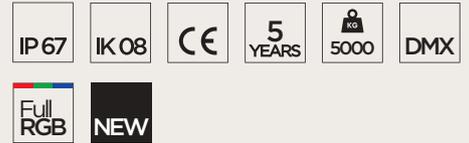


### Available on request



### Technical data

IP Rating	IP67
IK Rating	IK08
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included






403302		LINEAFACADE 300 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	380	38.00	
high-power led	30°	365	36.50	
high-power led	60°	335	33.50	
high-power led	10x60° ELLIPTICAL	365	36.50	

#### Finish color options:



#### Technical data

Class	III
Wattage	10 WATT
Light Source	Nr. 12 RGBW 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	1,70 Kg

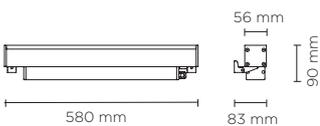

403306		LINEAFACADE 600 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	760	38.00	
high-power led	30°	730	36.50	
high-power led	60°	670	33.50	
high-power led	10x60° ELLIPTICAL	730	36.50	

#### Finish color options:



#### Technical data

Class	II
Wattage	20 WATT
Light Source	Nr. 24 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	3,00 Kg



403310		LINEAFACADE 900 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	1.140	38.00	
high-power led	30°	1.095	36.50	
high-power led	60°	1.005	33.50	
high-power led	10x60° ELLIPTICAL	1.095	36.50	

**Finish color options:**

- Textured Grey  
RAL 9006
- Anthracite Grey  
RAL 7016
- Matt Black  
(on request)

**Technical data**

Class	⊕
Wattage	30 WATT
Light Source	NR. 36 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	4,50 Kg



403314		LINEAFACADE 1200 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	1.520	38.00	
high-power led	30°	1.460	36.50	
high-power led	60°	1.340	33.50	
high-power led	10x60° ELLIPTICAL	1.460	36.50	

**Finish color options:**

- Textured Grey  
RAL 9006
- Anthracite Grey  
RAL 7016
- Matt Black  
(on request)

**Technical data**


Class	⊕
Wattage	40 WATT
Light Source	Nr. 48 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	6,00 Kg

## ACCESSORIES

AC132-300

MICROLOUVRE 300


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

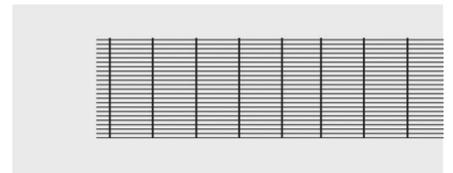

AC132-600

MICROLOUVRE 600


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

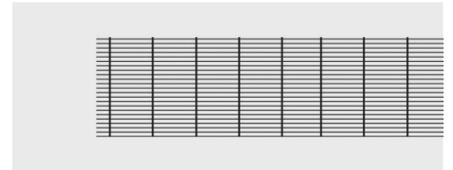

AC132-900

MICROLOUVRE 900


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

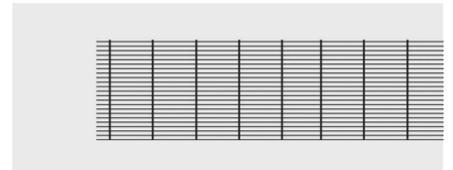

AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

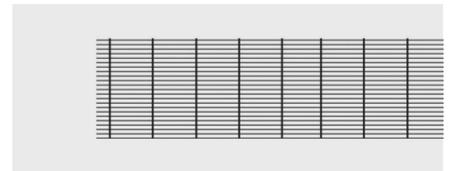

AC141-300

ANTI-GLARE SINGLE SHIELD 300

Anti-glare single shield, improving visual comfort on the outer side.



AC141-600

ANTI-GLARE SINGLE SHIELD 600


Anti-glare single shield, improving visual comfort on the outer side.



AC141-900

ANTI-GLARE SINGLE SHIELD 900

Anti-glare single shield, improving visual comfort on the outer side.

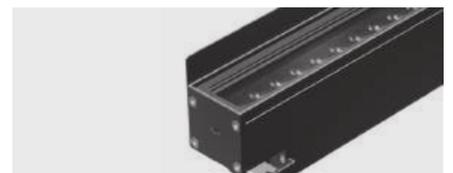

AC141-1200

ANTI-GLARE SINGLE SHIELD 1200

Anti-glare single shield, improving visual comfort on the outer side.



AC143-300

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE  
300 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC143-600

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE  
600 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, conferring very high glare control: each optic is individually shielded.



## ACCESSORIES

AC143-900

### ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 900 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC143-1200

### ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 1200 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC144

### PAIR OF LONGER BRACKETS L 100mm

100mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC145

### PAIR OF LONGER BRACKETS L 150mm

150mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC133

### FEED CABLE 1 MT.


Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

### JUMPER CABLE 2 MT.


2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

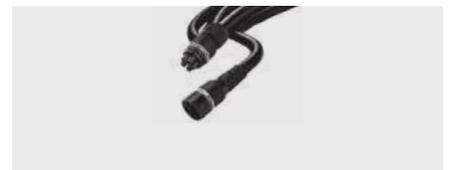

AC137

### JUMPER CABLE 4 MT.

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

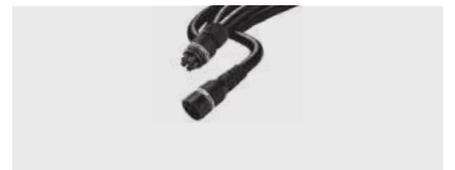

AC139

### END CAP

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



