



403304 - 403308 - 403312 - 403316

LINEAFACADE DIFFUSED


Linear shape luminaire for outdoor installation, surface mounted on a façade/wall with brackets, four available lengths (290mm, 580mm, 880mm, 1180mm) made in phospho-chromatised and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



403304



403308



403312



403316

Technical features




Available on request



Technical data

IP Rating	IP67
IK Rating	IK08
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request






403304		LINEAFACADE 300 DIFFUSED	
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	300	37.50
3000°K warm-white			
high-power led	DIFFUSED	310	38.75
4000°K neutral-white			
high-power led	DIFFUSED	330	41.25

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)



403308		LINEAFACADE 600 DIFFUSED	
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	500	41.66
3000°K warm-white			
high-power led	DIFFUSED	520	43.33
4000°K neutral-white			
high-power led	DIFFUSED	550	45.83

Finish color options:


- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)

Technical data

Class	⊕
Wattage	8 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	1,70 Kg

Technical data

Class	⊕
Wattage	12 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	3,00 Kg

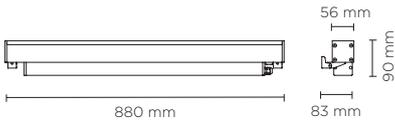

403312		LINEAFACADE 900 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	DIFFUSED	780	45.88	
3000°K warm-white				
high-power led	DIFFUSED	800	47.06	
4000°K neutral-white				
high-power led	DIFFUSED	830	48.80	

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)

Technical data

Class	⊕
Wattage	17 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	4,50 Kg



403316		LINEAGROUND 1200 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	DIFFUSED	1.010	42.08	
3000°K warm-white				
high-power led	DIFFUSED	1.050	43.75	
4000°K neutral-white				
high-power led	DIFFUSED	1.100	45.83	

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)


Technical data

Class	⊕
Wattage	24 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	6,00 Kg

ACCESSORIES


AC141-300 ANTI-GLARE SINGLE SHIELD 300

Anti-glare single shield, improving visual comfort on the outer side.

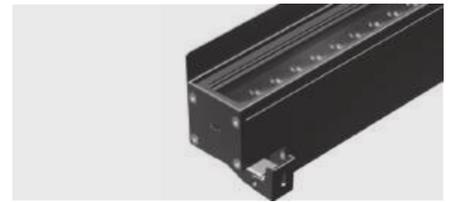


AC141-600 ANTI-GLARE SINGLE SHIELD 600

Anti-glare single shield, improving visual comfort on the outer side.

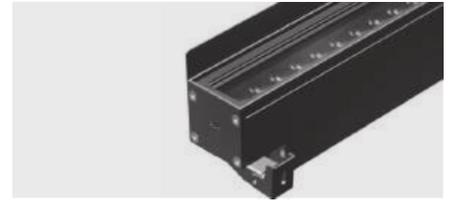

AC141-900 ANTI-GLARE SINGLE SHIELD 900

Anti-glare single shield, improving visual comfort on the outer side.

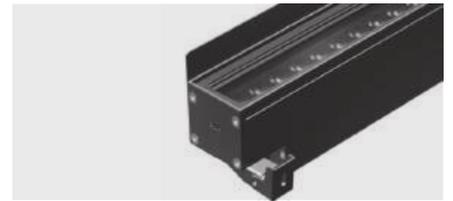

AC141-1200 ANTI-GLARE SINGLE SHIELD 1200

Anti-glare single shield, improving visual comfort on the outer side.



AC142-300 ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 300 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC142-600 ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 600 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC142-900 ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 900 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC142-1200 ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 1200 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, conferring very high glare control: each optic is individually shielded.



AC144 PAIR OF LONGER BRACKETS L 100mm

100mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



ACCESSORIES

AC145

PAIR OF LONGER BRACKETS L 150mm

150mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC133

FEED CABLE 1 MT.

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI


Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF


2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

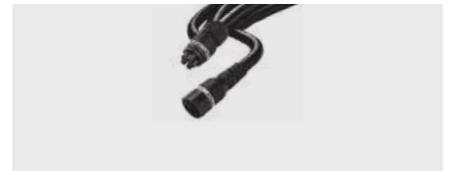

AC136

JUMPER CABLE 2 MT. DALI


2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

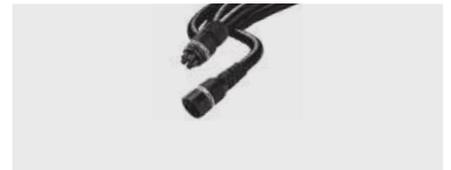

AC137

JUMPER CABLE 4 MT. ON/OFF

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

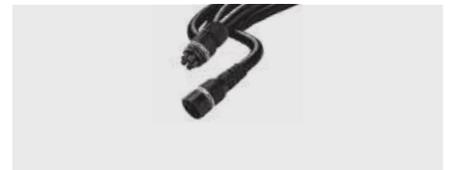

AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).



