

201200

LINEAGROUND TRIMLESS






NO EXPOSED SCREWS ONCE THE PRODUCT IS INSTALLED



PLENTY OF SOLUTIONS AS ANTI-GLARE ACCESSORIES



CONTINUOUS LINE OF LIGHT (END TO END INSTALLATION)

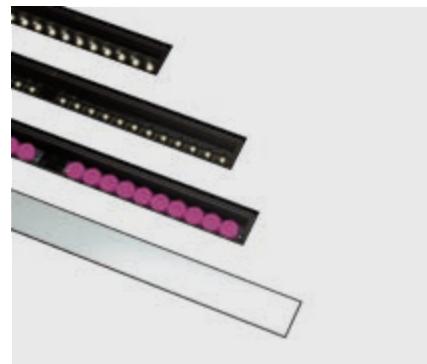


VARIETY OF LIGHT SOURCE & MODELS



SPECIAL TILT SYSTEM INTEGRATED ALLOWING ON SITE ADJUSTMENT +/- 15 DEG WITHOUT OPENING THE LUMINAIRE

LIGHT BEAM OPTIONS

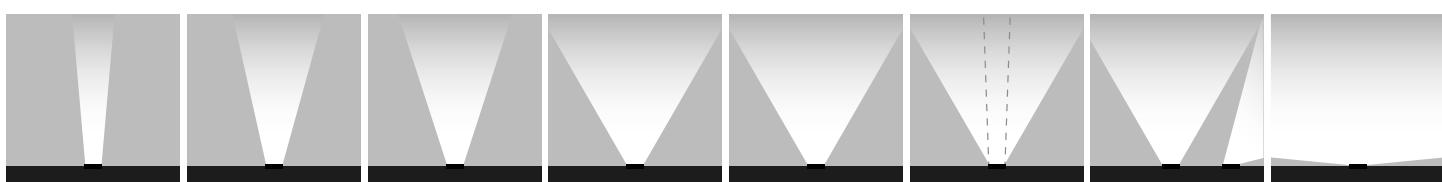

NARROW 15°

MEDIUM 30°

MEDIUM WIDE 35°


WIDE FLOOD 55°

WIDE FLOOD 60°

10x60° ELLIPTICAL

ASYMMETRIC WALL-WASHER

DIFFUSED

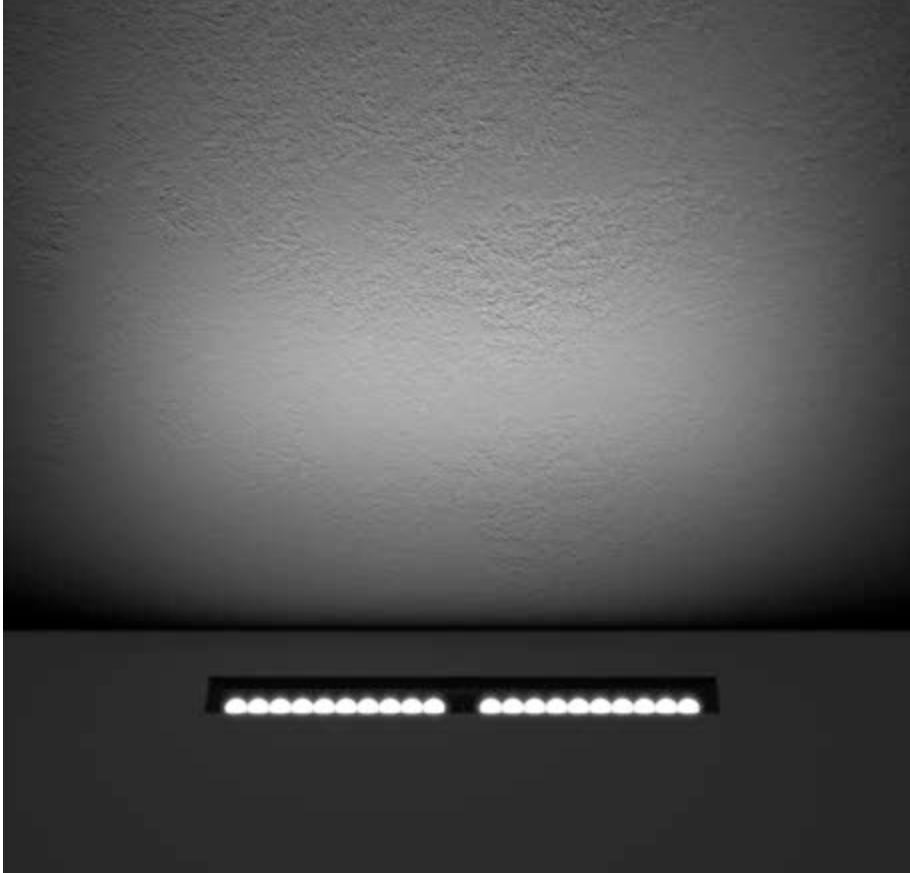

201201 - 201205 - 201209 - 201213

LINEAGROUND TRIMLESS HP

Trimless version of linear shape ground-recessed luminaire for outdoor installation, four available lengths (294mm, 584mm, 884mm, 1184mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



201201



201205



201209



201213

Technical features



NEW

Available on request



Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request







201201	LINEAGROUND 300 TRIMLESS HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	900	75.00	
high-power led	35°	870	72.50	
high-power led	55°	840	70.00	
high-power led	Asymmetric Wall-Washer	870	72.50	
3000°K warm-white				
high-power led	15°	930	77.50	
high-power led	35°	900	75.00	
high-power led	55°	870	72.50	
high-power led	Asymmetric Wall-Washer	900	75.00	
4000°K neutral-white				
high-power led	15°	960	80.00	
high-power led	35°	930	77.50	
high-power led	55°	900	75.00	
high-power led	Asymmetric Wall-Washer	930	77.50	

Finish color options:

Glass



Technical data

Class

Wattage 12 WATT

Light Source Nr. 12 SAMSUNG 3030 LED


Gross weight 3,00 Kg



201205	LINEAGROUND 600 TRIMLESS HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	1.800	75.00	
high-power led	35°	1.740	72.50	
high-power led	55°	1.680	70.00	
high-power led	Asymmetric Wall-Washer	1.740	72.50	
3000°K warm-white				
high-power led	15°	1.860	77.50	
high-power led	35°	1.800	75.00	
high-power led	55°	1.740	72.50	
high-power led	Asymmetric Wall-Washer	1.800	75.00	
4000°K neutral-white				
high-power led	15°	1.920	80.00	
high-power led	35°	1.860	77.50	
high-power led	55°	1.800	75.00	
high-power led	Asymmetric Wall-Washer	1.860	77.50	

Finish color options:

Glass



Technical data

Class

Wattage 24 WATT

Light Source Nr. 24 SAMSUNG 3030 LED



Gross weight 5,50 Kg



201209	LINEAGROUND 900 TRIMLESS HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	2.700	75.00	
high-power led	35°	2.610	72.50	
high-power led	55°	2.520	70.00	
high-power led	Asymmetric Wall-Washer	2.610	72.50	
3000°K warm-white				
high-power led	15°	2.790	77.50	
high-power led	35°	2.700	75.00	
high-power led	55°	2.610	72.50	
high-power led	Asymmetric Wall-Washer	2.700	75.00	
4000°K neutral-white				
high-power led	15°	2.880	80.00	
high-power led	35°	2.790	77.50	
high-power led	55°	2.700	75.00	
high-power led	Asymmetric Wall-Washer	2.790	77.50	

Finish color options:

Glass

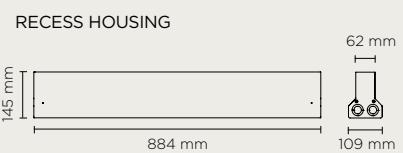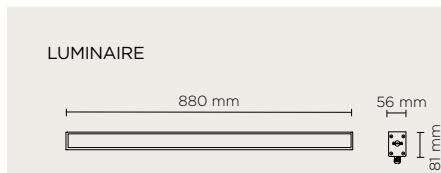

Technical data

Class

Wattage 36 WATT

Light Source Nr. 36 SAMSUNG 3030 LED

Gross weight 7,00 Kg



202113	LINEAGROUND 1200 TRIMLESS HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	3.600	75.00	
high-power led	35°	3.480	72.50	
high-power led	55°	3.360	70.00	
high-power led	Asymmetric Wall-Washer	3.480	72.50	
3000°K warm-white				
high-power led	15°	3.720	77.50	
high-power led	35°	3.600	75.00	
high-power led	55°	3.480	72.50	
high-power led	Asymmetric Wall-Washer	3.600	75.00	
4000°K neutral-white				
high-power led	15°	3.840	80.00	
high-power led	35°	3.720	77.50	
high-power led	55°	3.600	75.00	
high-power led	Asymmetric Wall-Washer	3.720	77.50	

Finish color options:

Glass



Technical data

Class

Wattage 48 WATT

Light Source Nr. 48 SAMSUNG 3030 LED


Gross weight 9,50 Kg

ACCESSORIES

AC132-300

MICROLOUVRE 300

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

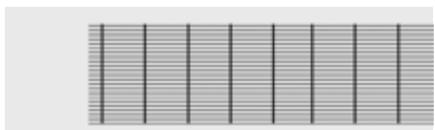

AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

FEED CABLE 1 MT. ON/OFF

Initial cable 3 core, to start an in-line installation, cable length 1 meter.

Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI

Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter.

Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

JUMPER CABLE 2 MT. DALI

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT. ON/OFF

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).




AC141

KIT "CONTINUOUS LINE" FOR LINEAGROUND TRIMLESS

Alignment rods + securing screws, to allow create "Continuous line" system joining various Lineaground Trimless units together.



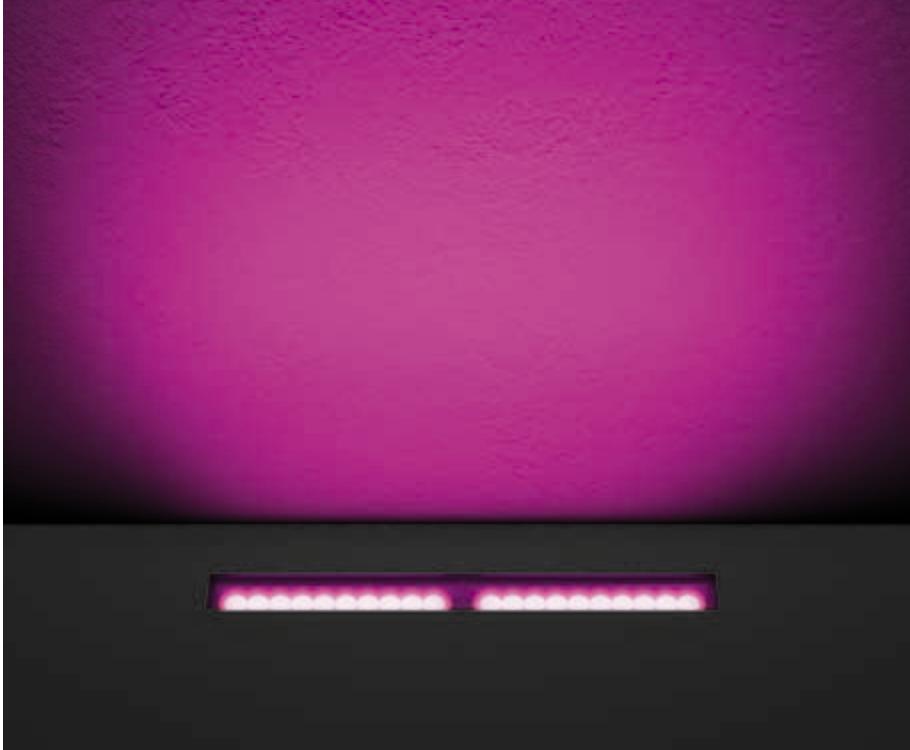

201202 - 201206 - 201210 - 201214

LINEAGROUND TRIMLESS HP DMX RGBW

Trimless version of linear shape ground-recessed luminaire for outdoor installation, four available lengths (294mm, 584mm, 884mm, 1184mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz (except for smaller length 294mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with RGBW(3000K) 3535 LED. IP67 rating.



201202



201206



201110



201214

Technical features



Available on request




Technical data


IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included



LUMINAIRE



RECESS HOUSING



201202

LINEAGROUND 300 TRIMLESS HP DMX RGBW

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW 3000K			
high-power led	15°	380	38.00
high-power led	30°	365	36.50
high-power led	60°	335	33.50
high-power led	10x60° ELLIPTICAL	365	36.50

Finish color options:

Glass


Technical data

Class	
Wattage	10 WATT
Light Source	Nr. 12 RGBW 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	3,00 Kg

LUMINAIRE



RECESS HOUSING



201206

LINEAGROUND 600TRIMLESS HP DMX RGBW

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW 3000K			
high-power led	15°	760	38.00
high-power led	30°	730	36.50
high-power led	60°	670	33.50
high-power led	10x60° ELLIPTICAL	730	36.50

Finish color options:



Glass

Technical data

Class	
Wattage	20 WATT
Light Source	Nr. 24 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	5,50 Kg

LUMINAIRE

RECESS HOUSING

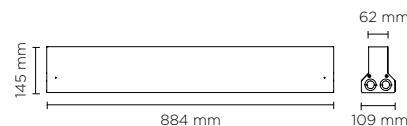

201210 LINEAGROUND 900 TRIMLESS HP DMX RGBW

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW 3000K			
high-power led	15°	1.140	38.00
high-power led	30°	1.095	36.50
high-power led	60°	1.005	33.50
high-power led	10x60° ELLIPTICAL	1.095	36.50

Finish color options:


Glass

Technical data

Class	
Wattage	30 WATT
Light Source	NR. 36 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	7,00 Kg

LUMINAIRE

RECESS HOUSING



201214 LINEAGROUND 1200 TRIMLESS HP DMX RGBW

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW 3000K			
high-power led	15°	1.520	38.00
high-power led	30°	1.460	36.50
high-power led	60°	1.340	33.50
high-power led	10x60° ELLIPTICAL	1.460	36.50

Finish color options:

Glass

Technical data

Class	
Wattage	40 WATT
Light Source	Nr. 48 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	9,50 Kg

ACCESSORIES

AC132-300

MICROLOUVRE 300

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

FEED CABLE 1 MT.

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT.


2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT.

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

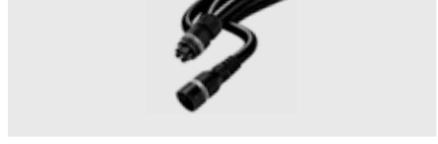

AC139

END CAP

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC141

KIT "CONTINUOUS LINE" FOR LINEAGROUND TRIMLESS

Alignment rods + securing screws, to allow create "Continuous line" system joining various Lineaground Trimless units together.





201203-201207-201211-201215

LINEAGROUND TRIMLESS HP DMX TUNABLE WHITE

Trimless version of linear shape ground-recessed luminaire for outdoor installation, four available lengths (294mm, 584mm, 884mm, 1184mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside Built-in LED driver 220-240V 50-60Hz (except for smaller length 294mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with Tunable White 3535 LED. IP67 rating.



201203



201207




201211



201215

Technical features

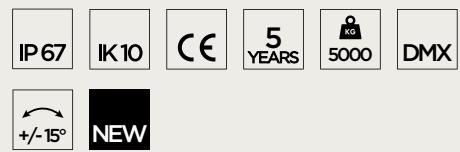

Available on request




Technical data


IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included



LUMINAIRE



RECESS HOUSING



201203	LINEAGROUND 300 TRIMLESS HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	650	65.00
high-power led	30°	635	63.50
high-power led	60°	620	62.00
high-power led	10x60° ELLIPTICAL	635	63.50


Finish color options:



Technical data

Class	
Wattage	10 WATT
Light Source	Nr. 12 TUNABLE WHITE 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	3,00 Kg

LUMINAIRE



RECESS HOUSING



201207	LINEAGROUND 600 TRIMLESS HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	1.300	65.00
high-power led	30°	1.270	63.50
high-power led	60°	1.240	62.00
high-power led	10x60° ELLIPTICAL	1.270	63.50

Finish color options:





Technical data

Class	
Wattage	20 WATT
Light Source	Nr. 24 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	5,50 Kg

LUMINAIRE

RECESS HOUSING

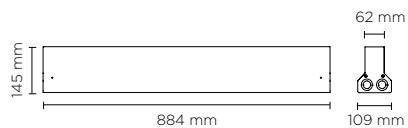

201211	LINEAGROUND 900 TRIMLESS HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	1.950	65.00
high-power led	30°	1.905	63.50
high-power led	60°	1.860	62.00
high-power led	10x60° ELLIPTICAL	1.905	63.50

Finish color options:


Glass

Technical data

Class	
Wattage	30 WATT
Light Source	NR. 36 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	7,00 Kg

LUMINAIRE

RECESS HOUSING



201215	LINEAGROUND 1200 TRIMLESS HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	2.600	65.00
high-power led	30°	2.540	63.50
high-power led	60°	2.480	62.00
high-power led	10x60° ELLIPTICAL	2.540	63.50

Finish color options:

Glass

Technical data

Class	
Wattage	40 WATT
Light Source	Nr. 48 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	9,50 Kg

ACCESSORIES

AC132-300

MICROLOUVRE 300


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

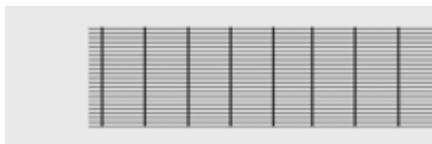

AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

FEED CABLE 1 MT.

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT.

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT.

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC139

END CAP


End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.




AC141

KIT "CONTINUOUS LINE" FOR LINEAGROUND TRIMLESS

Alignment rods + securing screws, to allow create "Continuous line" system joining various Lineaground Trimless units together.

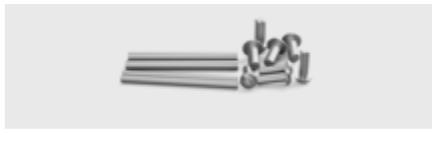

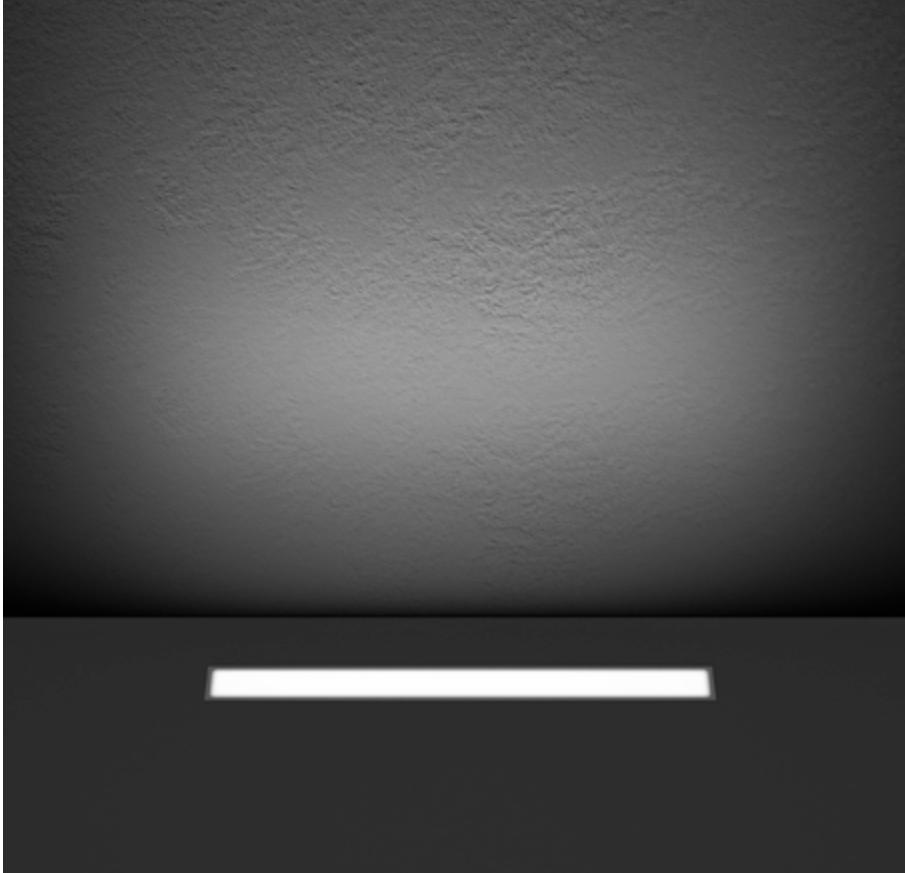

201204-201208-201212-201216

LINEAGROUND TRIMLESS DIFFUSED

Trimless version of linear shape ground-recessed luminaire for outdoor installation, four available lengths (294mm, 584mm, 884mm, 1184mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



201204



201208



201212



201216

Technical features



NEW


Available on request

DALI


Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request

LUMINAIRE



RECESS HOUSING



201204	LINEAGROUND 300 TRIMLESS DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	300	37.50
3000°K warm-white			
high-power led	DIFFUSED	310	38.75
4000°K neutral-white			
high-power led	DIFFUSED	330	41.25

Finish color options:

Glass


Technical data

Class	
Wattage	8 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	3,00 Kg

LUMINAIRE



RECESS HOUSING



201208	LINEAGROUND 600 TRIMLESS DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	500	41.66
3000°K warm-white			
high-power led	DIFFUSED	520	43.33
4000°K neutral-white			
high-power led	DIFFUSED	550	45.83

Finish color options:



Glass

Technical data

Class	
Wattage	12 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	5,50 Kg

LUMINAIRE

RECESS HOUSING

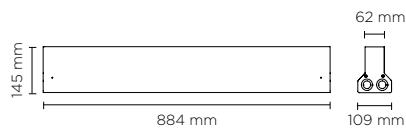

201212	LINEAGROUND 900 TRIMLESS DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	780	45.88
3000°K warm-white			
high-power led	DIFFUSED	800	47.06
4000°K neutral-white			
high-power led	DIFFUSED	830	48.80

Finish color options:

Glass

Technical data

Class 


Wattage 17 WATT

Light Source Nr. 36 SAMSUNG 3030 LED

Gross weight 7,00 Kg

LUMINAIRE

RECESS HOUSING

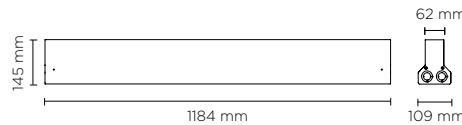

201216	LINEAGROUND 1200 TRIMLESS DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	1.010	42.08
3000°K warm-white			
high-power led	DIFFUSED	1.050	43.75
4000°K neutral-white			
high-power led	DIFFUSED	1.100	45.83

Finish color options:

Glass

Technical data

Class 

Wattage 24 WATT

Light Source Nr. 48 SAMSUNG 3030 LED

Gross weight 9,50 Kg

ACCESSORIES

AC133

FEED CABLE 1 MT. ON/OFF

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

JUMPER CABLE 2 MT. DALI

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT. ON/OFF


4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

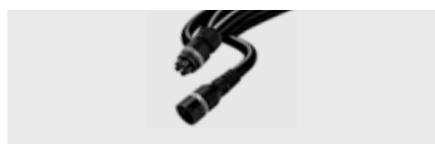

AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).



AC141

KIT "CONTINUOUS LINE" FOR LINEAGROUND TRIMLESS

Alignment rods + securing screws, to allow create "Continuous line" system joining various Lineaground Trimless units together.

