


701500

# LINEACEILING



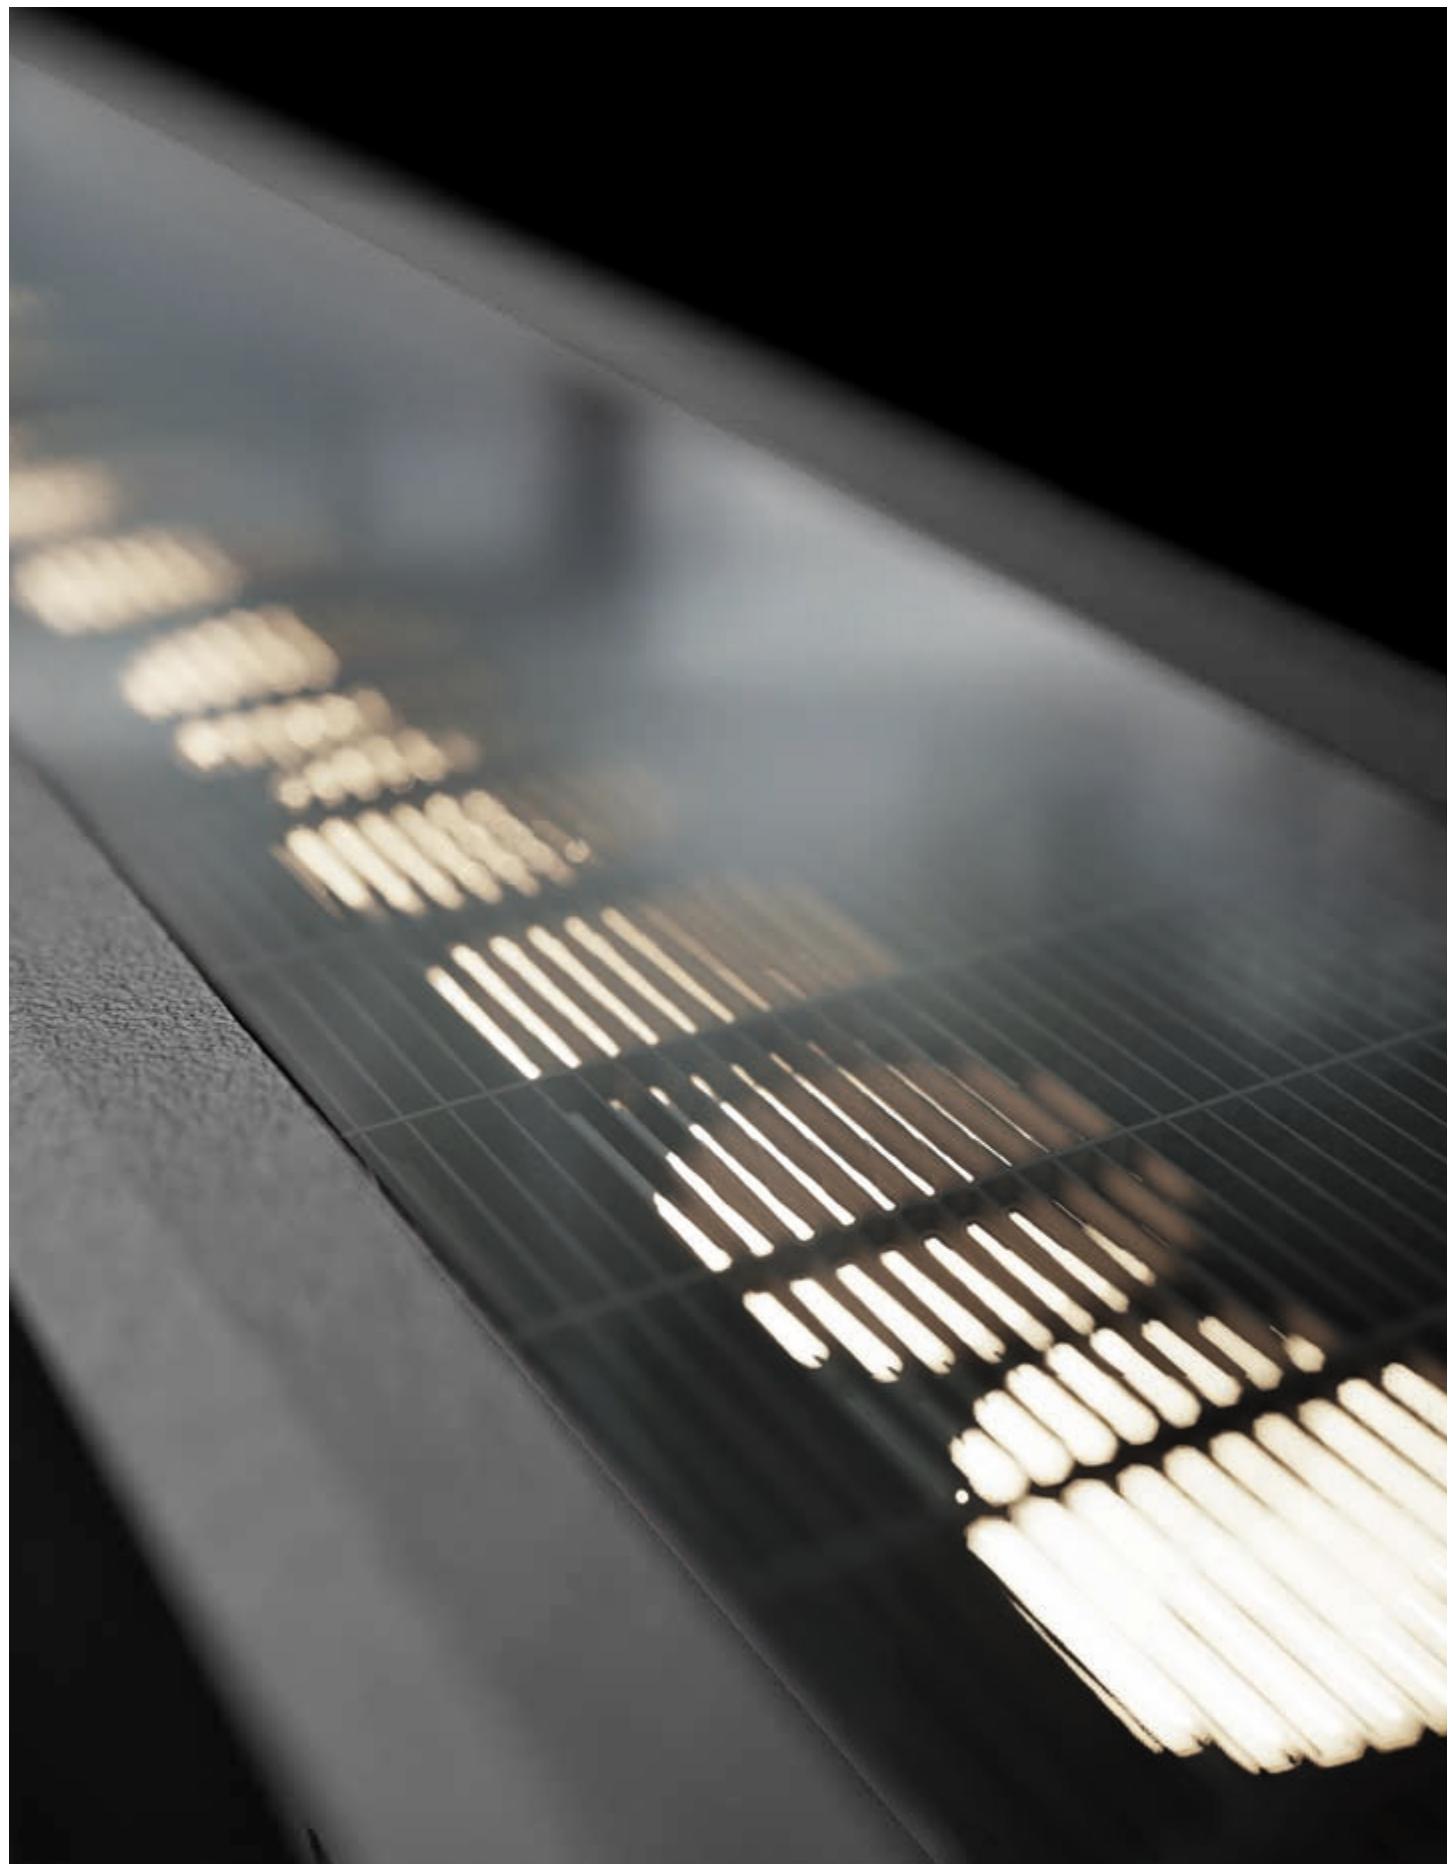

NO EXPOSED  
SCREWS ONCE  
THE PRODUCT IS  
INSTALLED



PLENTY OF  
SOLUTIONS AS  
ANTI-GLARE  
ACCESSORIES



only  
12 mm  
REDUCED WIDTH  
AT 12 MM  
FOR BETTER  
AESTHETIC  
IMPACT




VARIETY OF  
LIGHT SOURCE  
& MODELS



SPECIAL  
TILT SYSTEM  
INTEGRATED  
ALLOWING  
ON SITE  
ADJUSTMENT  
+/- 15 DEG  
WITHOUT  
OPENING  
THE LUMINAIRE

## LIGHT BEAM OPTIONS

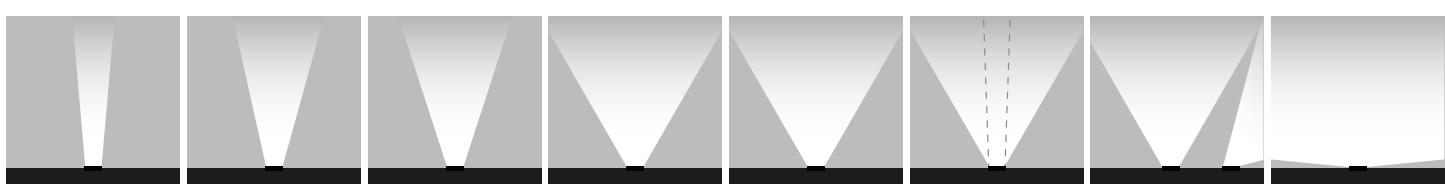

NARROW 15°

MEDIUM 30°

MEDIUM  
WIDE 35°

WIDE  
FLOOD 55°

WIDE  
FLOOD 60°

10x60°  
ELLIPTICAL

ASYMMETRIC  
WALL-WASHER

DIFFUSED



#### Technical features



Available on request



**701501 - 701505 - 701509 - 701513**

## LINEACEILING HP

Linear shape ceiling-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, stainless steel springs. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.

310 mm



**701501**

600 mm



**701505**

900 mm



**701509**

1200 mm



**701513**

#### Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request







701501	LINEACEILING 300 HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	900	75.00	
high-power led	35°	870	72.50	
high-power led	55°	840	70.00	
high-power led	Asymmetric Wall-Washer	870	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	930	77.50	
high-power led	35°	900	75.00	
high-power led	55°	870	72.50	
high-power led	Asymmetric Wall-Washer	900	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	960	80.00	
high-power led	35°	930	77.50	
high-power led	55°	900	75.00	
high-power led	Asymmetric Wall-Washer	930	77.50	

**Finish color options:**

Matt Black



HOLE FOR RECESS



**Technical data**

Class

Wattage 12 WATT

Light Source Nr. 12 SAMSUNG 3030 LED


Gross weight 1,70 Kg




701505	LINEACEILING 600 HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	1.800	75.00	
high-power led	35°	1.740	72.50	
high-power led	55°	1.680	70.00	
high-power led	Asymmetric Wall-Washer	1.740	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	1.860	77.50	
high-power led	35°	1.800	75.00	
high-power led	55°	1.740	72.50	
high-power led	Asymmetric Wall-Washer	1.800	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	1.920	80.00	
high-power led	35°	1.860	77.50	
high-power led	55°	1.800	75.00	
high-power led	Asymmetric Wall-Washer	1.860	77.50	

**Finish color options:**

Matt Black



HOLE FOR RECESS



**Technical data**

Class

Wattage 24 WATT

Light Source Nr. 24 SAMSUNG 3030 LED


Gross weight 3,00 Kg




701509	LINEACEILING 900 HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	2.700	75.00	
high-power led	35°	2.610	72.50	
high-power led	55°	2.520	70.00	
high-power led	Asymmetric Wall-Washer	2.610	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	2.790	77.50	
high-power led	35°	2.700	75.00	
high-power led	55°	2.610	72.50	
high-power led	Asymmetric Wall-Washer	2.700	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	2.880	80.00	
high-power led	35°	2.790	77.50	
high-power led	55°	2.700	75.00	
high-power led	Asymmetric Wall-Washer	2.790	77.50	

**Finish color options:**

Matt Black

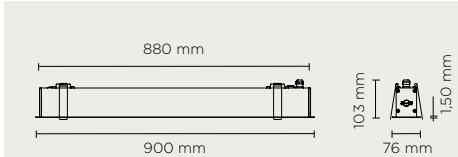

**HOLE FOR RECESS**



**Technical data**

Class

Wattage 36 WATT

Light Source Nr. 36 SAMSUNG 3030 LED


Gross weight 4,50 Kg




701513	LINEACEILING 1200 HP			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	3.600	75.00	
high-power led	35°	3.480	72.50	
high-power led	55°	3.360	70.00	
high-power led	Asymmetric Wall-Washer	3.480	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	3.720	77.50	
high-power led	35°	3.600	75.00	
high-power led	55°	3.480	72.50	
high-power led	Asymmetric Wall-Washer	3.600	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	3.840	80.00	
high-power led	35°	3.720	77.50	
high-power led	55°	3.600	75.00	
high-power led	Asymmetric Wall-Washer	3.720	77.50	

**Finish color options:**

Matt Black

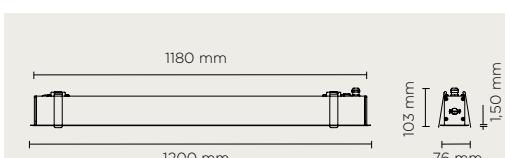

**HOLE FOR RECESS**



**Technical data**

Class

Wattage 48 WATT

Light Source Nr. 48 SAMSUNG 3030 LED

Gross weight 6,00 Kg

## ACCESSORIES

AC132-300

**MICROLOUVRE 300**


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

**MICROLOUVRE 600**


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

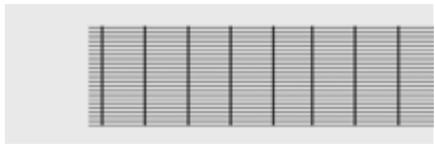

AC132-900

**MICROLOUVRE 900**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

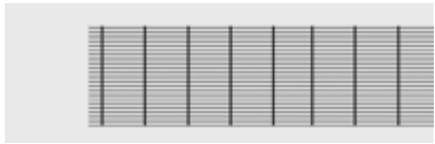

AC132-1200

**MICROLOUVRE 1200**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

**FEED CABLE 1 MT. ON/OFF**

Initial cable 3 core, to start an in-line installation, cable length 1 meter.

Open wires for mains connection and IP68 connector for fixture connection.



AC134

**FEED CABLE 1 MT. DALI**

Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter.

Open wires for mains connection and IP68 connector for fixture connection.



AC135

**JUMPER CABLE 2 MT. ON/OFF**


2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

**JUMPER CABLE 2 MT. DALI**


2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

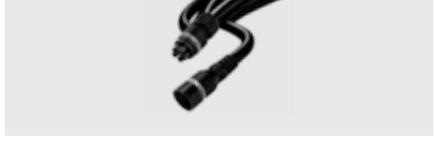

AC137

**JUMPER CABLE 4 MT. ON/OFF**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

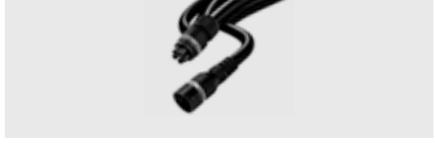

AC138

**JUMPER CABLE 4 MT. DALI**

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

**END CAP ON/OFF**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

**END CAP DALI**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).





701502 - 701506 - 701510 - 701514

## LINEACEILING HP DMX RGBW

Linear shape ceiling-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, stainless steel springs. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz (except for smaller length 310mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with RGBW(3000K) 3535 LED. IP67 rating.

310 mm



701502

600 mm



701506

900 mm



701510

1200 mm



701514

### Technical features




Available on request






### Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included

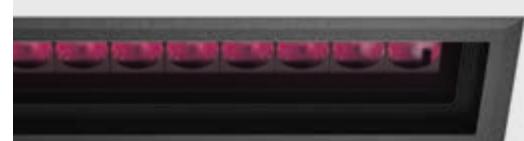

HOLE FOR RECESS


**701502** LINEACEILING 300 HP DMX RGBW




light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>RGBW 3000K</b>			
high-power led	15°	380	38.00
high-power led	30°	365	36.50
high-power led	60°	335	33.50
high-power led	10x60° ELLIPTICAL	365	36.50

## Finish color options:

 Matt Black
**Technical data**

Class	III
Wattage	10 WATT
Light Source	Nr. 12 RGBW 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	1,70 Kg

HOLE FOR RECESS



**701506** LINEACEILING 600 HP DMX RGBW

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>RGBW 3000K</b>			
high-power led	15°	760	38.00
high-power led	30°	730	36.50
high-power led	60°	670	33.50
high-power led	10x60° ELLIPTICAL	730	36.50

## Finish color options:

 Matt Black
**Technical data**

Class	III
Wattage	20 WATT
Light Source	Nr. 24 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	3,00 Kg

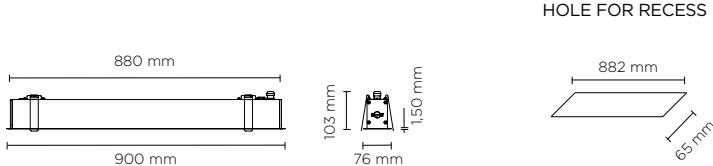


701510	LINEACEILING 900 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>RGBW 3000K</b>			
high-power led	15°	1.140	38.00
high-power led	30°	1.095	36.50
high-power led	60°	1.005	33.50
high-power led	10x60° ELLIPTICAL	1.095	36.50

**Finish color options:**

Matt Black

**Technical data**

Class	
Wattage	30 WATT
Light Source	NR. 36 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	4,50 Kg

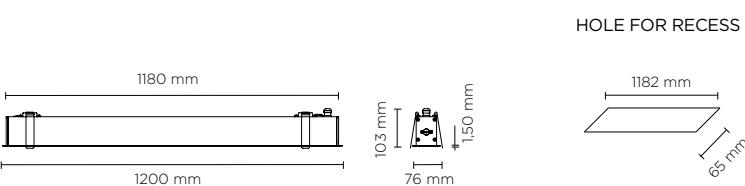

701514	LINEACEILING 1200 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>RGBW 3000K</b>			
high-power led	15°	1.520	38.00
high-power led	30°	1.460	36.50
high-power led	60°	1.340	33.50
high-power led	10x60° ELLIPTICAL	1.460	36.50

**Finish color options:**

Matt Black

**Technical data**

Class	
Wattage	40 WATT
Light Source	Nr. 48 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	6,00 Kg

## ACCESSORIES

**AC132-300**

**MICROLOUVRE 300**


Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC132-600**

**MICROLOUVRE 600**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.

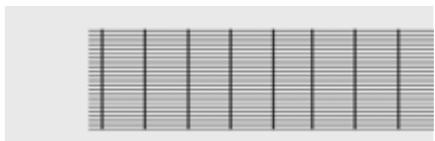

**AC132-900**

**MICROLOUVRE 900**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC132-1200**

**MICROLOUVRE 1200**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC133**

**FEED CABLE 1 MT.**

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



**AC135**

**JUMPER CABLE 2 MT.**

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



**AC137**

**JUMPER CABLE 4 MT.**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



**AC139**

**END CAP**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.





#### Technical features



Available on request



**701503 - 701507 - 701511 - 701515**

## LINEACEILING HP DMX TUNABLE WHITE

Linear shape ceiling-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, stainless steel springs. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz (except for smaller length 310mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with Tunable White 3535 LED. IP67 rating.

310 mm



**701503**

600 mm



**701507**

900 mm



**701511**

1200 mm



**701515**

#### Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included



HOLE FOR RECESS



701503	LINEACEILING 300 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	650	65.00
high-power led	30°	635	63.50
high-power led	60°	620	62.00
high-power led	10x60° ELLIPTICAL	635	63.50


**Finish color options:**

Matt Black

**Technical data**

Class	III
Wattage	10 WATT
Light Source	Nr. 12 TUNABLE WHITE 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	1,70 Kg

HOLE FOR RECESS

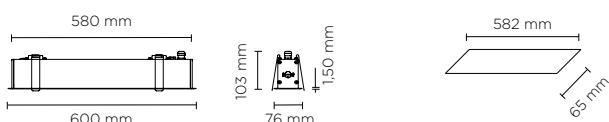


701507	LINEACEILING 600 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	1.300	65.00
high-power led	30°	1.270	63.50
high-power led	60°	1.240	62.00
high-power led	10x60° ELLIPTICAL	1.270	63.50

**Finish color options:**

Matt Black

**Technical data**

Class	III
Wattage	20 WATT
Light Source	Nr. 24 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	3,00 Kg

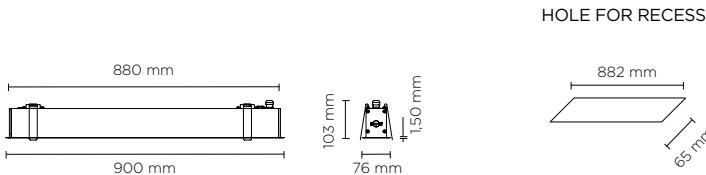


701511	LINEACEILING 900 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	1.950	65.00
high-power led	30°	1.905	63.50
high-power led	60°	1.860	62.00
high-power led	10x60° ELLIPTICAL	1.905	63.50

**Finish color options:**

Matt Black

**Technical data**

Class	
Wattage	30 WATT
Light Source	NR. 36 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	4,50 Kg

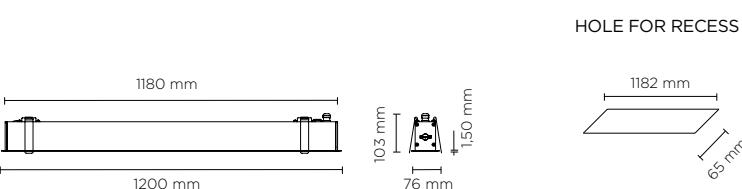

701515	LINEACEILING 1200 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	2.600	65.00
high-power led	30°	2.540	63.50
high-power led	60°	2.480	62.00
high-power led	10x60° ELLIPTICAL	2.540	63.50

**Finish color options:**

Matt Black

**Technical data**

Class	
Wattage	40 WATT
Light Source	Nr. 48 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	6,00 Kg

## ACCESSORIES

**AC132-300**

**MICROLOUVRE 300**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC132-600**

**MICROLOUVRE 600**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC132-900**

**MICROLOUVRE 900**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC132-1200**

**MICROLOUVRE 1200**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



**AC133**

**FEED CABLE 1 MT.**

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



**AC135**

**JUMPER CABLE 2 MT.**

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



**AC137**

**JUMPER CABLE 4 MT.**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).




**AC139**

**END CAP**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



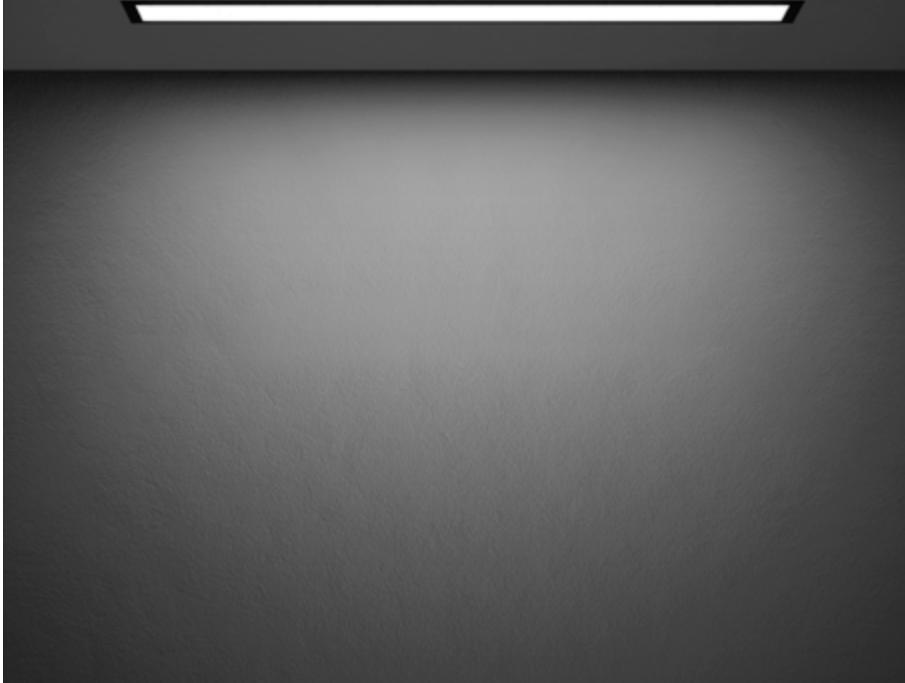

**701504 - 701508 - 701512 - 701516**

## LINEACEILING DIFFUSED

Linear shape ceiling-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, stainless steel springs. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.




**701504**



**701508**



**701512**



**701516**

### Technical features



Available on request




### Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request



HOLE FOR RECESS

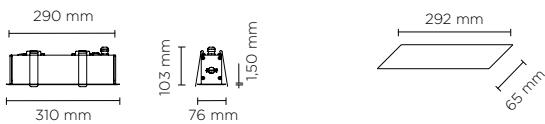

701504	LINEACEILING 300 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	300	37.50
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	310	38.75
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	330	41.25


Finish color options:

Matt Black

Technical data

Class	
Wattage	8 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	1,70 Kg

HOLE FOR RECESS

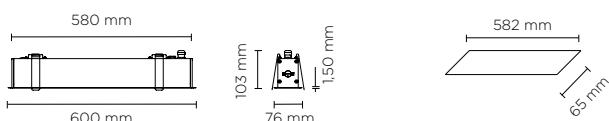


701508	LINEACEILING 600 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	500	41.66
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	520	43.33
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	550	45.83

Finish color options:

Matt Black

Technical data

Class	
Wattage	12 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	3,00 Kg

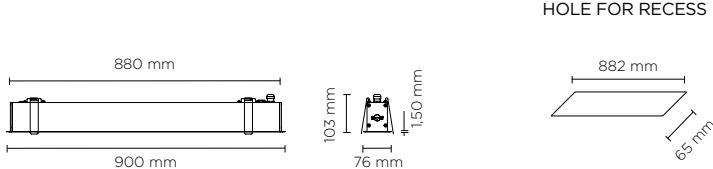


701512	LINEACEILING 900 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	780	45.88
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	800	47.06
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	830	48.80

**Finish color options:**

Matt Black

**Technical data**

Class	
Wattage	17 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	4,50 Kg

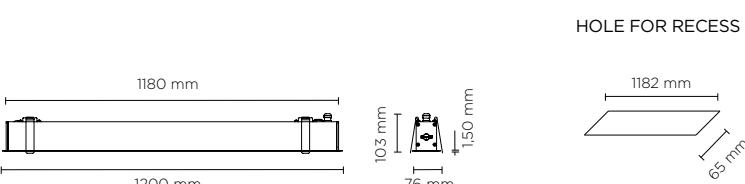

701516	LINEAGROUND 1200 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	1.010	42.08
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	1.050	43.75
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	1.100	45.83

**Finish color options:**

Matt Black

**Technical data**

Class	
Wattage	24 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	6,00 Kg

## ACCESSORIES

AC133

**FEED CABLE 1 MT. ON/OFF**

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC134

**FEED CABLE 1 MT. DALI**

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

**JUMPER CABLE 2 MT. ON/OFF**

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

**JUMPER CABLE 2 MT. DALI**

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

**JUMPER CABLE 4 MT. ON/OFF**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

**JUMPER CABLE 4 MT. DALI**

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

**END CAP ON/OFF**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

**END CAP DALI**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).



701500

# LINEACEILING “CONTINUOUS LINE” SYSTEM



## 701500 LINEACEILING “CONTINUOUS LINE” (SYSTEM)

701501L	LINEACEILING 300 HP - LEFT	701507L	LINEACEILING 600 HP DMX TUNABLE-WHITE - LEFT
701501R	LINEACEILING 300 HP - RIGHT	701507R	LINEACEILING 600 HP DMX TUNABLE-WHITE - RIGHT
701501X	LINEACEILING 300 HP - INTERMEDIATE	701507X	LINEACEILING 600 HP DMX TUNABLE-WHITE INTERMEDIATE
701502L	LINEACEILING 300 HP DMX RGBW - LEFT	701508L	LINEACEILING 600 DIFFUSED - LEFT
701502R	LINEACEILING 300 HP DMX RGBW - RIGHT	701508R	LINEACEILING 600 DIFFUSED - RIGHT
701502X	LINEACEILING 300 HP DMX RGBW - INTERMEDIATE	701508X	LINEACEILING 600 DIFFUSED INTERMEDIATE
701503L	LINEACEILING 300 HP DMX TUNABLE-WHITE - LEFT	701509L	LINEACEILING 900 HP - LEFT
701503R	LINEACEILING 300 HP DMX TUNABLE-WHITE - RIGHT	701509R	LINEACEILING 900 HP - RIGHT
701503X	LINEACEILING 300 HP DMX TUNABLE-WHITE INTERMEDIATE	701509X	LINEACEILING 900 HP - INTERMEDIATE
701504L	LINEACEILING 300 DIFFUSED - LEFT	701510L	LINEACEILING 900 HP DMX RGBW - LEFT
701504X	LINEACEILING 300 DIFFUSED - RIGHT	701510R	LINEACEILING 900 HP DMX RGBW - RIGHT
701504L	LINEACEILING 300 DIFFUSED - INTERMEDIATE	701510X	LINEACEILING 900 HP DMX RGBW INTERMEDIATE
701505L	LINEACEILING 600 HP - LEFT	701511L	LINEACEILING 900 HP DMX TUNABLE-WHITE - LEFT
701505R	LINEACEILING 600 HP - RIGHT	701511R	LINEACEILING 900 HP DMX TUNABLE-WHITE - RIGHT
701505X	LINEACEILING 600 HP - INTERMEDIATE	701511X	LINEACEILING 900 HP DMX TUNABLE-WHITE INTERMEDIATE
701506L	LINEACEILING 600 HP DMX RGBW - LEFT		
701506R	LINEACEILING 600 HP DMX RGBW - RIGHT		
701506X	LINEACEILING 600 HP DMX RGBW - INTERMEDIATE		



<b>701512L</b>	LINEACEILING 900 DIFFUSED - LEFT
<b>701512R</b>	LINEACEILING 900 DIFFUSED - RIGHT
<b>701512X</b>	LINEACEILING 900 DIFFUSED - INTERMEDIATE
<b>701513L</b>	LINEACEILING 1200 HP - LEFT
<b>701513R</b>	LINEACEILING 1200 HP - RIGHT
<b>701513X</b>	LINEACEILING 1200 HP - INTERMEDIATE
<b>701514L</b>	LINEACEILING 1200 HP DMX RGBW - LEFT
<b>701514R</b>	LINEACEILING 1200 HP DMX RGBW - RIGHT
<b>701514X</b>	LINEACEILING 1200 HP DMX RGBW - INTERMEDIATE
<b>701515L</b>	LINEACEILING 1200 HP DMX TUNABLE-WHITE LEFT
<b>701515R</b>	LINEACEILING 1200 HP DMX TUNABLE-WHITE - RIGHT
<b>701515X</b>	LINEACEILING 1200 HP DMX TUNABLE-WHITE INTERMEDIATE
<b>701516L</b>	LINEACEILING 1200 DIFFUSED - LEFT
<b>701516R</b>	LINEACEILING 1200 DIFFUSED - RIGHT
<b>701516X</b>	LINEACEILING 1200 DIFFUSED - INTERMEDIATE

#### ACCESSORIES LINEACEILING LINEACEILING CONTINUOUS LINE

<b>AC132-300</b>	MICROLOUVRE 300
<b>AC132-600</b>	MICROLOUVRE 600
<b>AC132-900</b>	MICROLOUVRE 900
<b>AC132-1200</b>	MICROLOUVRE 1200
<b>AC133</b>	FEED CABLE 1 MT. ON/OFF
<b>AC134</b>	FEED CABLE 1 MT. DALI
<b>AC135</b>	JUMPER CABLE 2 MT. ON/OFF
<b>AC136</b>	JUMPER CABLE 2 MT. DALI
<b>AC137</b>	JUMPER CABLE 4 MT. ON/OFF
<b>AC138</b>	JUMPER CABLE 4 MT. DALI
<b>AC139</b>	END CAP ON/OFF
<b>AC140</b>	END CAP DALI