

403300

LINEAFACADE





REDUCED
SPACING FOR
SEAMLESS
INSTALLATION
WHEN JOINING
ONE PRODUCT
TO OTHER
(3 MM)




BRACKETS
IN VARIOUS
LENGTHS TO
ACHIEVE PERFECT
LIGHTING EFFECT
ON THE WALL



VARIETY OF
LIGHT SOURCE
& MODELS


PLENTY OF SOLUTIONS AS ANTI-GLARE ACCESSORIES

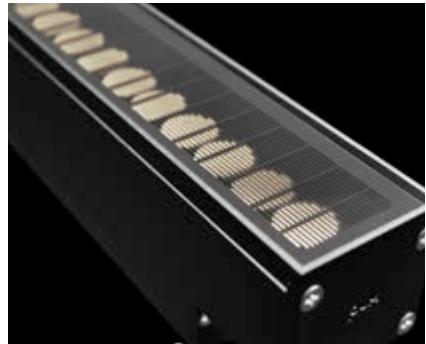

MICRO-LOUVRE




ANTI-GLARE
SINGLE SHIELD

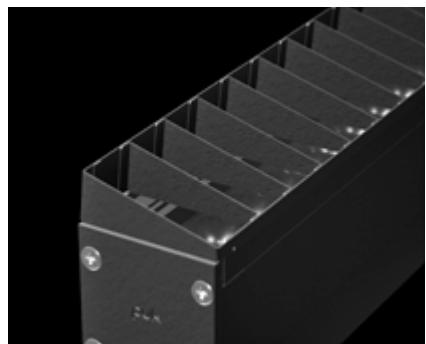

ANTI-GLARE
ASYMMETRIC
SHIELD

LIGHT BEAM OPTIONS

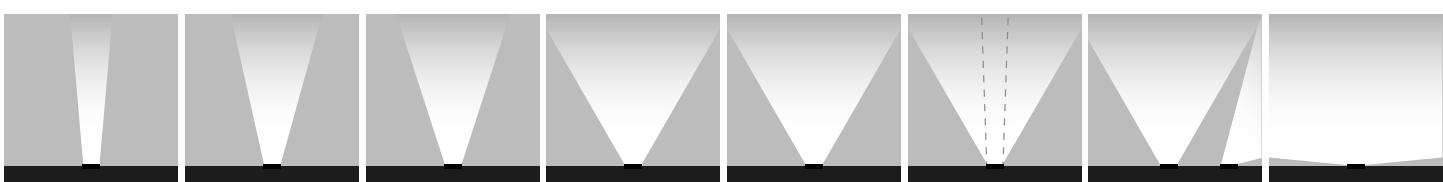

NARROW 15°

MEDIUM 30°

MEDIUM
WIDE 35°

WIDE
FLOOD 55°

WIDE
FLOOD 60°

10x60°
ELLIPTICAL

ASYMMETRIC
WALL-WASHER

DIFFUSED



Technical features



Available on request



403301 - 403305 - 403309 - 403313

LINEAFACADE HP

Linear shape luminaire for outdoor installation, surface mounted on a façade/wall with brackets, four available lengths (290mm, 580mm, 880mm, 1180mm) made in phospho-chromatised and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



403301



403305



403309



403313

Technical data

IP Rating	IP67
IK Rating	IK08
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request






403301 LINEAFACADE 300 HP				
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	900	75.00	
high-power led	35°	870	72.50	
high-power led	55°	840	70.00	
high-power led	Asymmetric Wall-Washer	870	72.50	
3000°K warm-white				
high-power led	15°	930	77.50	
high-power led	35°	900	75.00	
high-power led	55°	870	72.50	
high-power led	Asymmetric Wall-Washer	900	75.00	
4000°K neutral-white				
high-power led	15°	960	80.00	
high-power led	35°	930	77.50	
high-power led	55°	900	75.00	
high-power led	Asymmetric Wall-Washer	930	77.50	

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)



Technical data

Class

Wattage 12 WATT

Light Source Nr. 12 SAMSUNG 3030 LED

Gross weight 1,70 Kg




403305 LINEAFACADE 600 HP				
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	1.800	75.00	
high-power led	35°	1.740	72.50	
high-power led	55°	1.680	70.00	
high-power led	Asymmetric Wall-Washer	1.740	72.50	
3000°K warm-white				
high-power led	15°	1.860	77.50	
high-power led	35°	1.800	75.00	
high-power led	55°	1.740	72.50	
high-power led	Asymmetric Wall-Washer	1.800	75.00	
4000°K neutral-white				
high-power led	15°	1.920	80.00	
high-power led	35°	1.860	77.50	
high-power led	55°	1.800	75.00	
high-power led	Asymmetric Wall-Washer	1.860	77.50	

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)

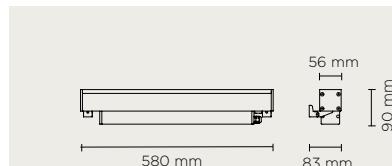

Technical data

Class

Wattage 24 WATT

Light Source Nr. 24 SAMSUNG 3030 LED

Gross weight 3,00 Kg



403309 LINEAFACADE 900 HP				
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	2.700	75.00	
high-power led	35°	2.610	72.50	
high-power led	55°	2.520	70.00	
high-power led	Asymmetric Wall-Washer	2.610	72.50	
3000°K warm-white				
high-power led	15°	2.790	77.50	
high-power led	35°	2.700	75.00	
high-power led	55°	2.610	72.50	
high-power led	Asymmetric Wall-Washer	2.700	75.00	
4000°K neutral-white				
high-power led	15°	2.880	80.00	
high-power led	35°	2.790	77.50	
high-power led	55°	2.700	75.00	
high-power led	Asymmetric Wall-Washer	2.790	77.50	

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

	Technical data
Class	
Wattage	36 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	4,50 Kg



403313 LINEAFACADE 1200 HP				
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
2700°K warm-white				
high-power led	15°	3.600	75.00	
high-power led	35°	3.480	72.50	
high-power led	55°	3.360	70.00	
high-power led	Asymmetric Wall-Washer	3.480	72.50	
3000°K warm-white				
high-power led	15°	3.720	77.50	
high-power led	35°	3.600	75.00	
high-power led	55°	3.480	72.50	
high-power led	Asymmetric Wall-Washer	3.600	75.00	
4000°K neutral-white				
high-power led	15°	3.840	80.00	
high-power led	35°	3.720	77.50	
high-power led	55°	3.600	75.00	
high-power led	Asymmetric Wall-Washer	3.720	77.50	

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

	Technical data
Class	
Wattage	48 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	6,00 Kg

ACCESSORIES

AC132-300

MICROLOUVRE 300

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC141-300

ANTI-GLARE SINGLE SHIELD 300

Anti-glare single shield, improving visual comfort on the outer side.



AC141-600

ANTI-GLARE SINGLE SHIELD 600

Anti-glare single shield, improving visual comfort on the outer side.



AC141-900

ANTI-GLARE SINGLE SHIELD 900

Anti-glare single shield, improving visual comfort on the outer side.



AC141-1200

ANTI-GLARE SINGLE SHIELD 1200

Anti-glare single shield, improving visual comfort on the outer side.



AC142-300

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 300 SINGLE COLOR

Anti-glare asymmetrical shield for single-color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC142-600

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 600 SINGLE COLOR

Anti-glare asymmetrical shield for single-color Lineafaçade range, confering very high glare control: each optic is individually shielded.



ACCESSORIES

AC142-900

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 900 SINGLE COLOR

Anti-glare asymmetrical shield for single-color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC142-1200

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 1200 SINGLE COLOR

Anti-glare asymmetrical shield for single-color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC144

PAIR OF LONGER BRACKETS L 100mm

100mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC145

PAIR OF LONGER BRACKETS L 150mm

150mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC133

FEED CABLE 1 MT. ON/OFF

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI


Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF


2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

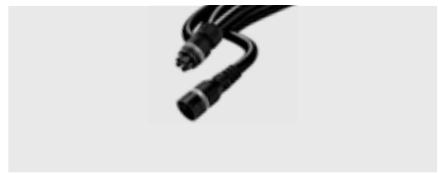

AC136

JUMPER CABLE 2 MT. DALI


2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

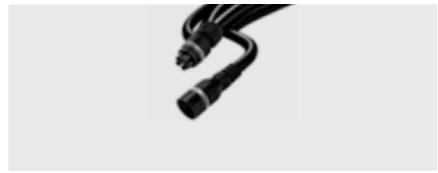

AC137

JUMPER CABLE 4 MT. ON/OFF


4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

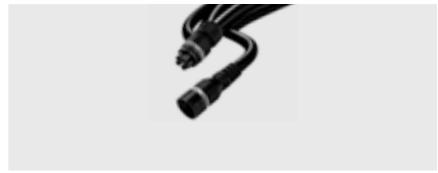

AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

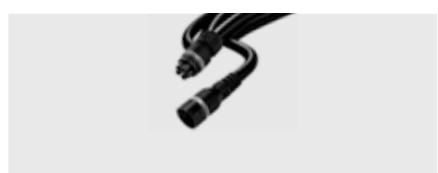

ACCESSORIES

AC139

END CAP ON/OFF


End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.




AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).

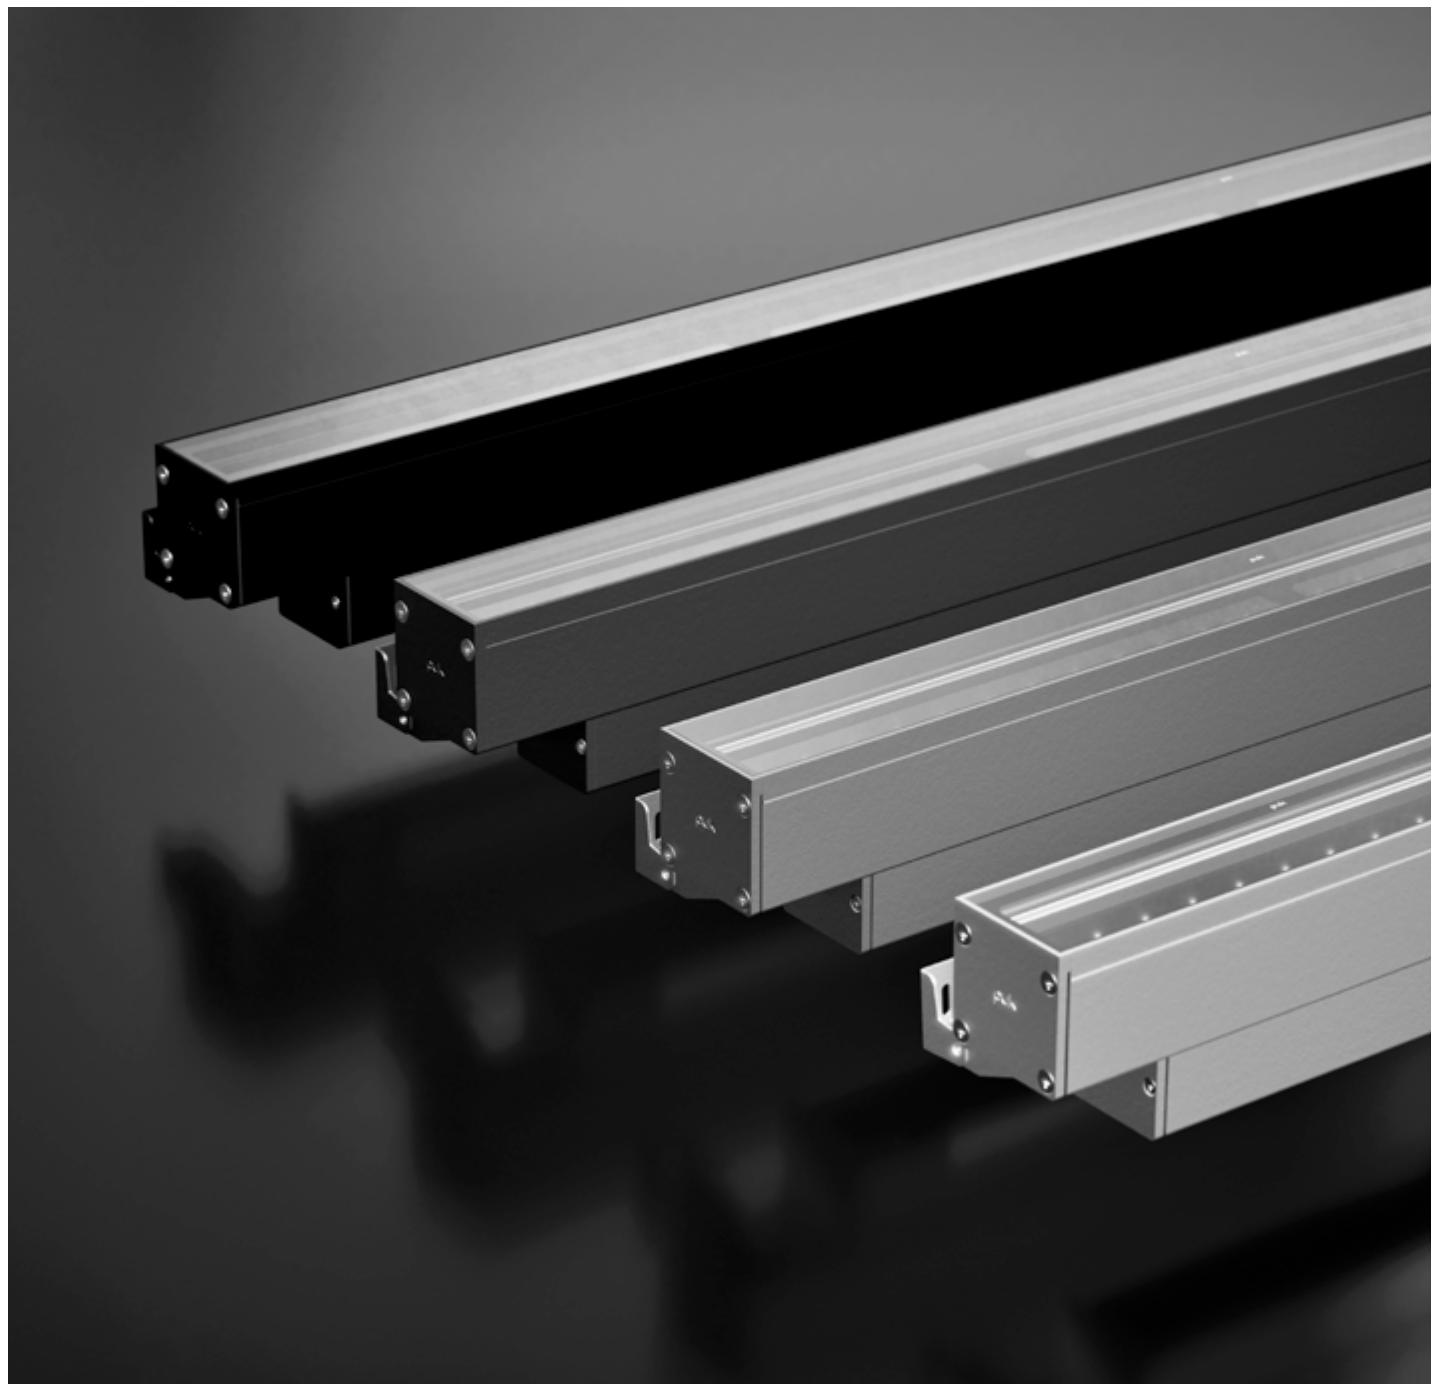


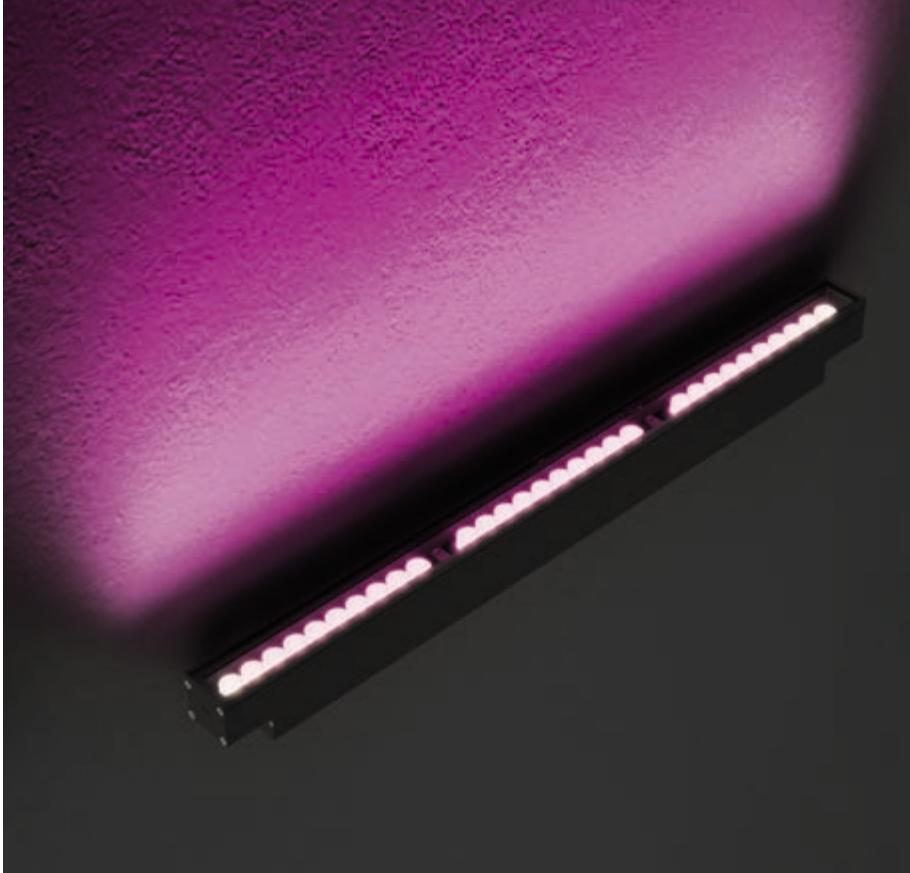

403302 - 403306 - 403310 - 403314

LINEAFACADE HP DMX RGBW

Linear shape luminaire for outdoor installation, surface mounted on a façade/wall with brackets, four available lengths (290mm, 580mm, 880mm, 1180mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets. Built-in LED driver 220-240V 50-60Hz (except for smaller length 290mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with RGBW(3000K) 3535 LED. IP67 rating.




403302



403306




403310



403314

Technical features

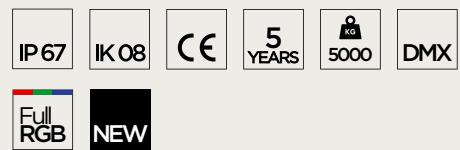


Available on request



Technical data

IP Rating	IP67
IK Rating	IK08
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included





403302	LINEAFACADE 300 HP DMX RGBW			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
RGBW 3000K				
high-power led	15°	380	38.00	
high-power led	30°	365	36.50	
high-power led	60°	335	33.50	
high-power led	10x60° ELLIPTICAL	365	36.50	

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical data


Class

Wattage 10 WATT

Light Source Nr. 12 RGBW 3535 LED

Transformer Constant voltage 24V DC
remote driver needed

Gross weight 1,70 Kg



403306	LINEAFACADE 600 HP DMX RGBW			
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
RGBW 3000K				
high-power led	15°	760	38.00	
high-power led	30°	730	36.50	
high-power led	60°	670	33.50	
high-power led	10x60° ELLIPTICAL	730	36.50	

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical data


Class

Wattage 20 WATT

Light Source Nr. 24 RGBW 3535 LED

Transformer Electrical power supply
220/240V 50/60Hz built-in

Gross weight 3,00 Kg

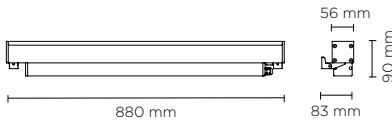

403310	LINEAFACADE 900 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW 3000K			
high-power led	15°	1.140	38.00
high-power led	30°	1.095	36.50
high-power led	60°	1.005	33.50
high-power led	10x60° ELLIPTICAL	1.095	36.50

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)

Technical data


Class

Wattage 30 WATT

Light Source NR. 36 RGBW 3535 LED

Transformer Electrical power supply 220/240V 50/60Hz built-in

Gross weight 4,50 Kg

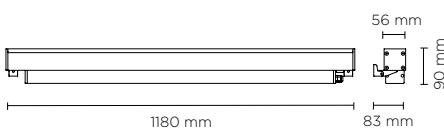

403314	LINEAFACADE 1200 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW 3000K			
high-power led	15°	1.520	38.00
high-power led	30°	1.460	36.50
high-power led	60°	1.340	33.50
high-power led	10x60° ELLIPTICAL	1.460	36.50

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)

Technical data

Class

Wattage 40 WATT

Light Source Nr. 48 RGBW 3535 LED

Transformer Electrical power supply 220/240V 50/60Hz built-in

Gross weight 6,00 Kg

ACCESSORIES

AC132-300

MICROLOUVRE 300

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC141-300

ANTI-GLARE SINGLE SHIELD 300

Anti-glare single shield, improving visual comfort on the outer side.



AC141-600

ANTI-GLARE SINGLE SHIELD 600


Anti-glare single shield, improving visual comfort on the outer side.



AC141-900

ANTI-GLARE SINGLE SHIELD 900


Anti-glare single shield, improving visual comfort on the outer side.

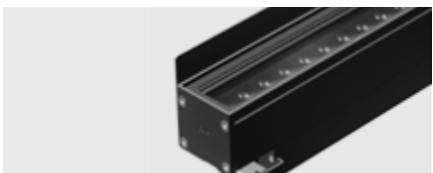

AC141-1200

ANTI-GLARE SINGLE SHIELD 1200

Anti-glare single shield, improving visual comfort on the outer side.

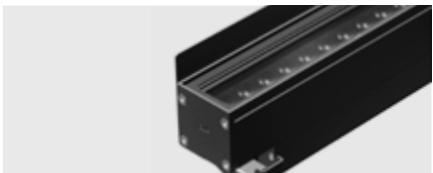

AC143-300

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 300 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC143-600

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 600 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



ACCESSORIES

AC143-900

**ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE
900 RGBW / TW**

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC143-1200

**ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE
1200 RGBW / TW**

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC144

PAIR OF LONGER BRACKETS L 100mm

100mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC145

PAIR OF LONGER BRACKETS L 150mm

150mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC133

FEED CABLE 1 MT.


Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT.


2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

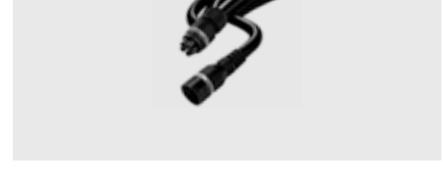

AC137

JUMPER CABLE 4 MT.

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

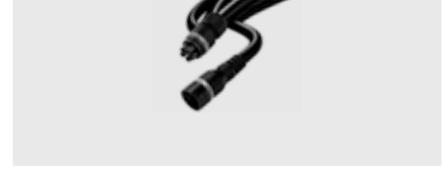



AC139

END CAP

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



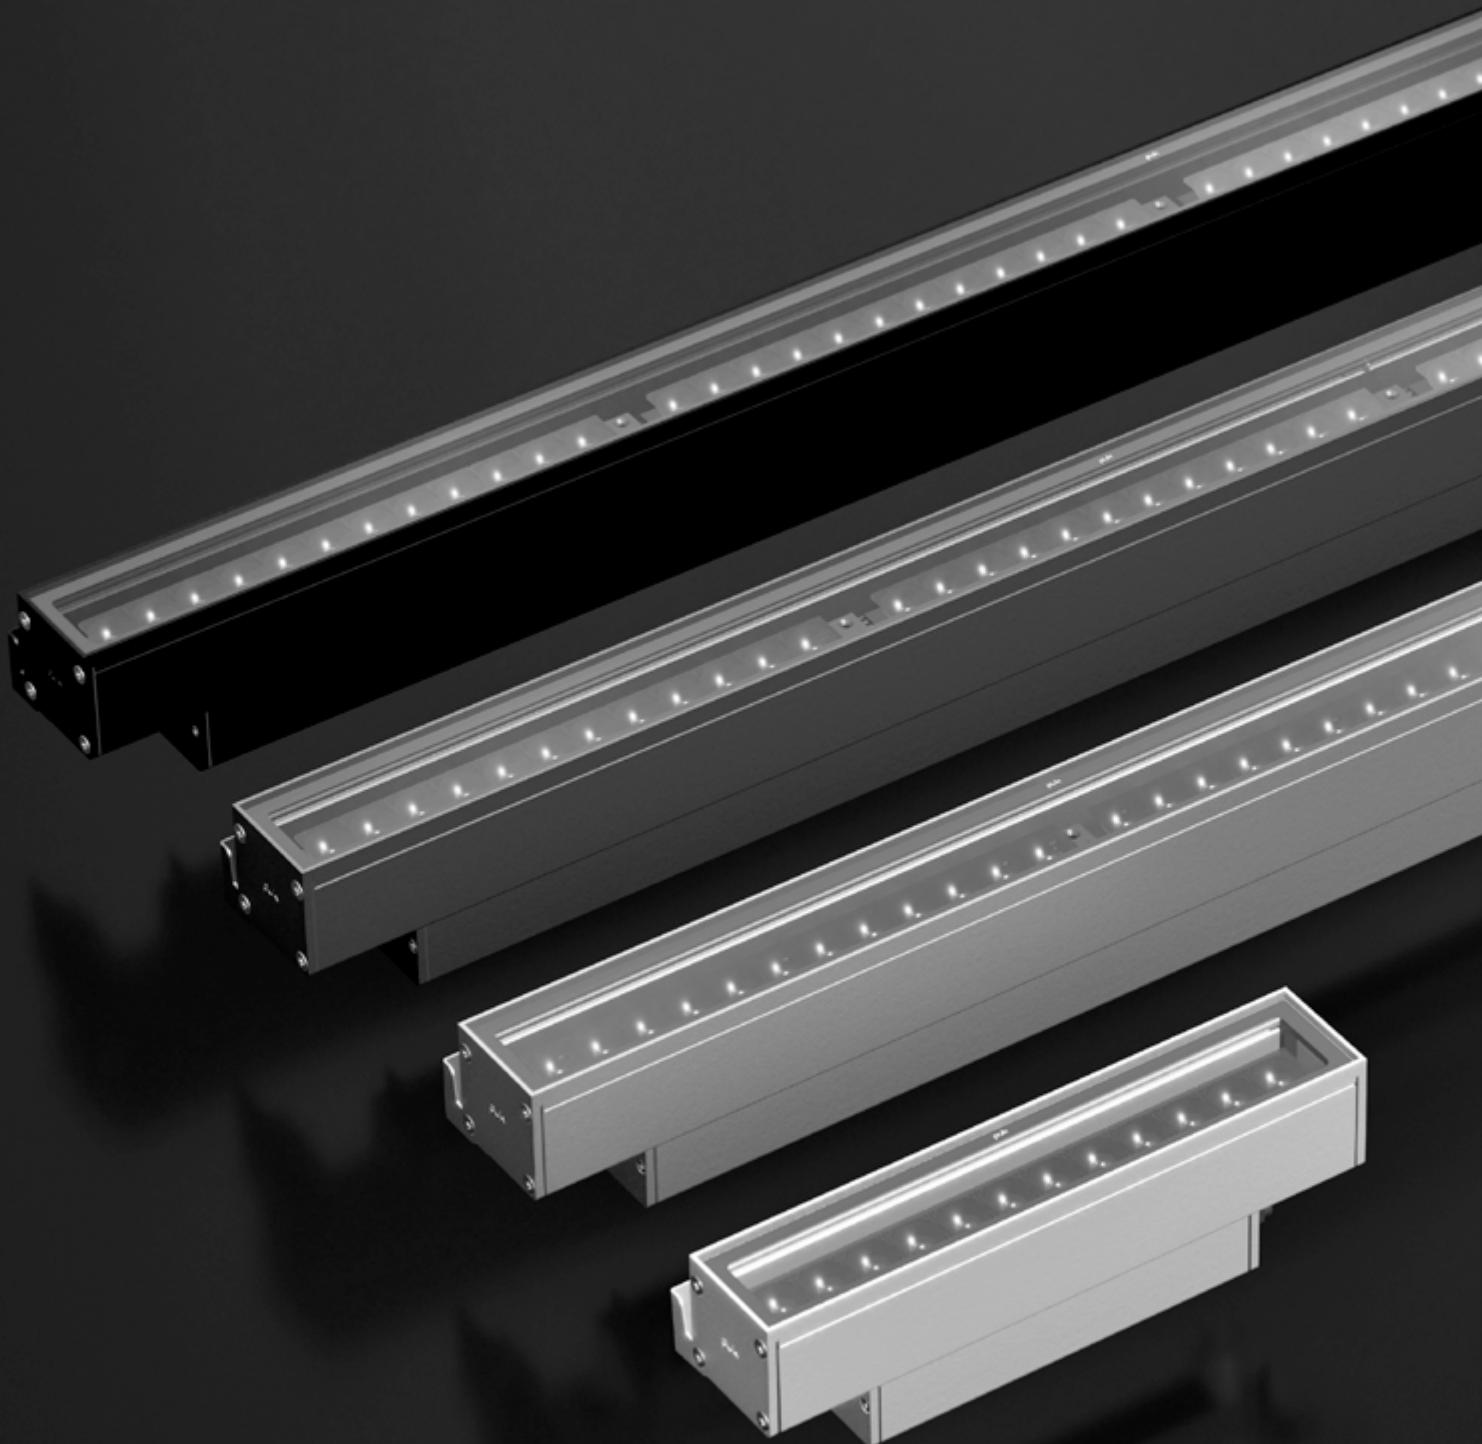


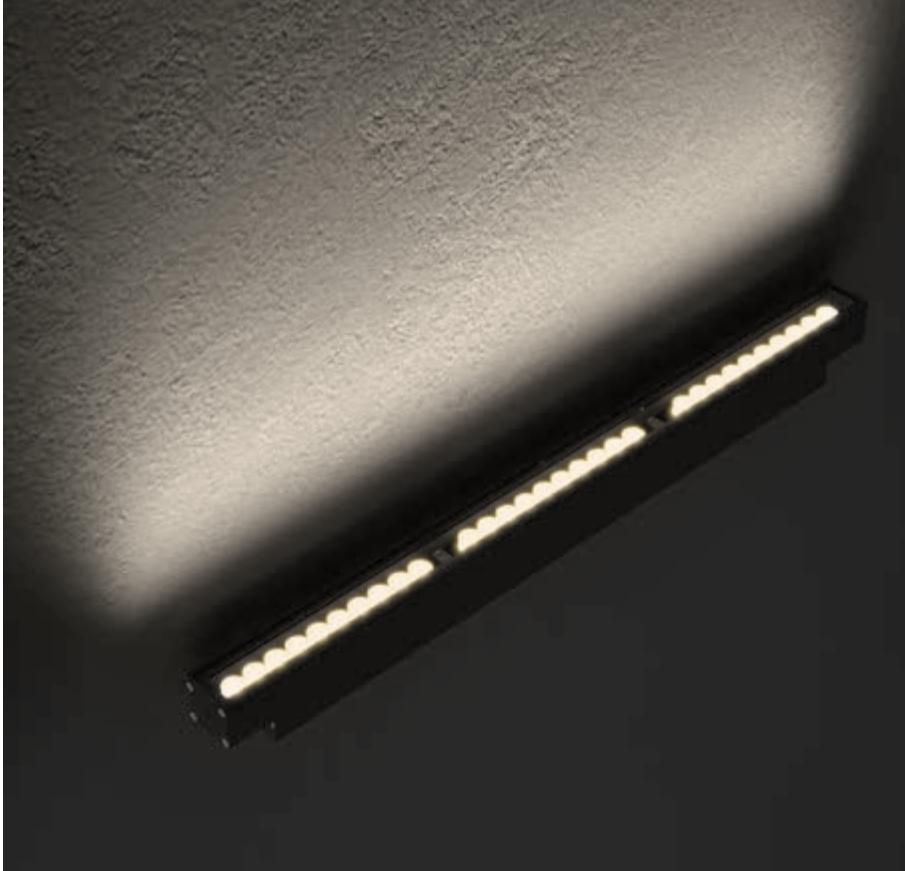

403303 - 403307 - 403311 - 403315

LINEAFACADE HP DMX TUNABLE WHITE

Linear shape luminaire for outdoor installation, surface mounted on a façade/wall with brackets, four available lengths (290mm, 580mm, 880mm, 1180mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets. Built-in LED driver 220-240V 50-60Hz (except for smaller length 290mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with Tunable-White 3535 LED (2700K-5700K). IP67 rating.



403303



403307



403311



403315

Technical features





Available on request



Technical data

IP Rating	IP67
IK Rating	IK08
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included

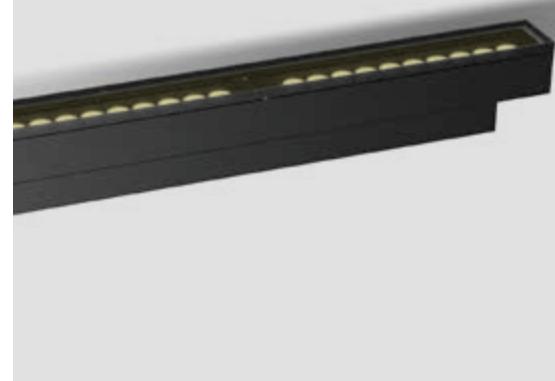



403303	LINEAFACADE 300 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	650	65.00
high-power led	30°	635	63.50
high-power led	60°	620	62.00
high-power led	10x60° ELLIPTICAL	635	63.50

Finish color options:


Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)

Technical data

Class	
Wattage	10 WATT
Light Source	Nr. 12 TUNABLE WHITE 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	1,70 Kg



403307	LINEAFACADE 600 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	1.300	65.00
high-power led	30°	1.270	63.50
high-power led	60°	1.240	62.00
high-power led	10x60° ELLIPTICAL	1.270	63.50

Finish color options:


Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)

Technical data

Class	
Wattage	20 WATT
Light Source	Nr. 24 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	3,00 Kg

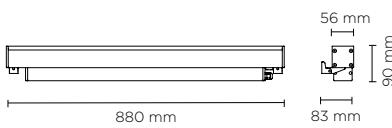

403311	LINEAFACADE 900 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	1.950	65.00
high-power led	30°	1.905	63.50
high-power led	60°	1.860	62.00
high-power led	10x60° ELLIPTICAL	1.905	63.50

Finish color options:


Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical data

Class	
Wattage	30 WATT
Light Source	NR. 36 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	4,50 Kg

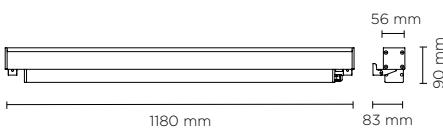

403315	LINEAFACADE 1200 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700K-5600K TUNABLE WHITE			
high-power led	15°	2.600	65.00
high-power led	30°	2.540	63.50
high-power led	60°	2.480	62.00
high-power led	10x60° ELLIPTICAL	2.540	63.50

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical data

Class	
Wattage	40 WATT
Light Source	Nr. 48 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	6,00 Kg

ACCESSORIES

AC132-300

MICROLOUVRE 300

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC141-300

ANTI-GLARE SINGLE SHIELD 300

Anti-glare single shield, improving visual comfort on the outer side.



AC141-600

ANTI-GLARE SINGLE SHIELD 600

Anti-glare single shield, improving visual comfort on the outer side.



AC141-900

ANTI-GLARE SINGLE SHIELD 900

Anti-glare single shield, improving visual comfort on the outer side.



AC141-1200

ANTI-GLARE SINGLE SHIELD 1200

Anti-glare single shield, improving visual comfort on the outer side.



AC143-300

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 300 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC143-600

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 600 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



ACCESSORIES

AC143-900

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 900 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC143-1200

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 1200 RGBW / TW

Anti-glare asymmetrical shield for RGBW/TW Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC144

PAIR OF LONGER BRACKETS L 100mm

100mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC145

PAIR OF LONGER BRACKETS L 150mm

150mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC133

FEED CABLE 1 MT.

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT.

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT.

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC139

END CAP

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.








403304 - 403308 - 403312 - 403316

LINEAFACADE DIFFUSED

Linear shape luminaire for outdoor installation, surface mounted on a façade/wall with brackets, four available lengths (290mm, 580mm, 880mm, 1180mm) made in phospho-chromatised and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



403304



403308



403312



403316

Technical features





Available on request



Technical data

IP Rating	IP67
IK Rating	IK08
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request

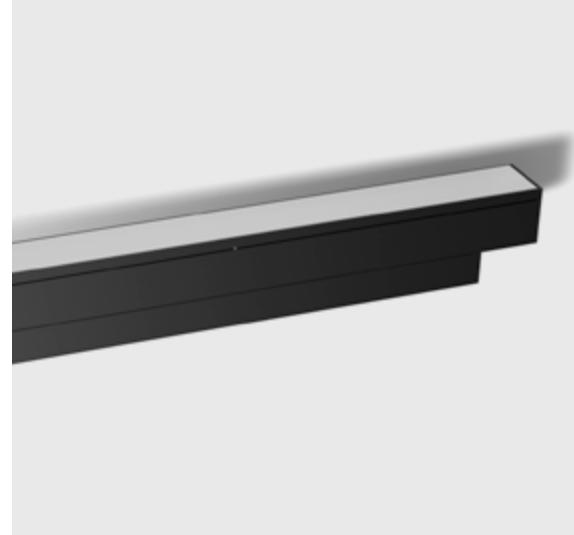



403304	LINEAFACADE 300 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	300	37.50
3000°K warm-white			
high-power led	DIFFUSED	310	38.75
4000°K neutral-white			
high-power led	DIFFUSED	330	41.25

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)


Technical data

Class

Wattage 8 WATT

Light Source Nr. 12 SAMSUNG 3030 LED

Gross weight 1,70 Kg



403308	LINEAFACADE 600 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	500	41.66
3000°K warm-white			
high-power led	DIFFUSED	520	43.33
4000°K neutral-white			
high-power led	DIFFUSED	550	45.83

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)


Technical data

Class

Wattage 12 WATT

Light Source Nr. 24 SAMSUNG 3030 LED

Gross weight 3,00 Kg

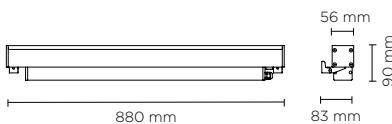

403312	LINEAFACADE 900 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	780	45.88
3000°K warm-white			
high-power led	DIFFUSED	800	47.06
4000°K neutral-white			
high-power led	DIFFUSED	830	48.80

Finish color options:

Textured Grey RAL 9006
 Anthracite Grey RAL 7016
 Matt Black (on request)

Technical data

Class	
Wattage	17 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	4,50 Kg



403316	LINEAGROUND 1200 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	DIFFUSED	1.010	42.08
3000°K warm-white			
high-power led	DIFFUSED	1.050	43.75
4000°K neutral-white			
high-power led	DIFFUSED	1.100	45.83

Finish color options:

Textured Grey RAL 9006
 Anthracite Grey RAL 7016
 Matt Black (on request)

Technical data


Class	
Wattage	24 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	6,00 Kg

ACCESSORIES

AC141-300

ANTI-GLARE SINGLE SHIELD 300

Anti-glare single shield, improving visual comfort on the outer side.

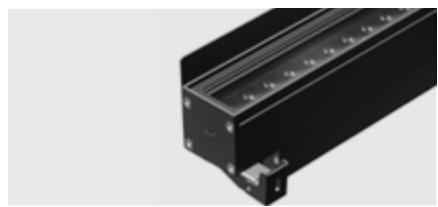

AC141-600

ANTI-GLARE SINGLE SHIELD 600

Anti-glare single shield, improving visual comfort on the outer side.



AC141-900

ANTI-GLARE SINGLE SHIELD 900

Anti-glare single shield, improving visual comfort on the outer side.



AC141-1200

ANTI-GLARE SINGLE SHIELD 1200

Anti-glare single shield, improving visual comfort on the outer side.



AC142-300

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 300 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC142-600

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 600 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC142-900

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 900 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC142-1200

ANTI-GLARE ASYMMETRIC SHIELD FOR LINEAFAÇADE 1200 single color

Anti-glare asymmetrical shield for single color Lineafaçade range, confering very high glare control: each optic is individually shielded.



AC144

PAIR OF LONGER BRACKETS L 100mm

100mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



ACCESSORIES

AC145

PAIR OF LONGER BRACKETS L 150mm

150mm length extension fixing brackets (2x), to increase the distance of Lineafaçade from the wall.



AC133

FEED CABLE 1 MT.

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI

Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

JUMPER CABLE 2 MT. DALI

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT. ON/OFF

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.



AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).



