



201100

# LINEAGROUND



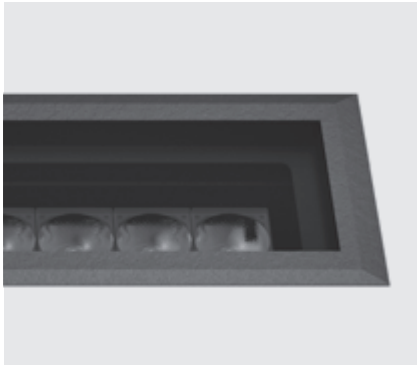


NO EXPOSED  
SCREWS ONCE  
THE PRODUCT IS  
INSTALLED

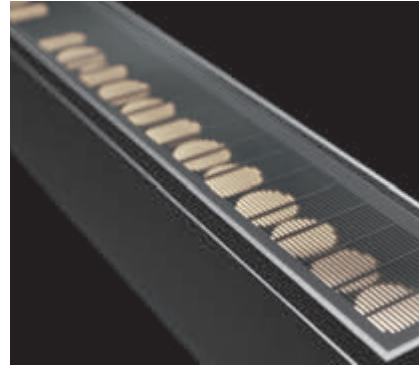

PLENTY OF  
SOLUTIONS AS  
ANTI-GLARE  
ACCESSORIES



only  
**12 mm**  
REDUCED WIDTH  
AT 12 MM  
FOR BETTER  
AESTHETIC  
IMPACT

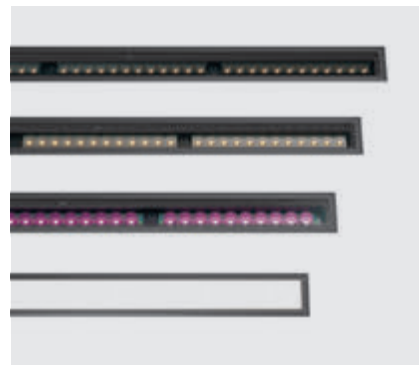

VARIETY OF  
LIGHT SOURCE  
& MODELS



SPECIAL  
TILT SYSTEM  
INTEGRATED  
ALLOWING  
ON SITE  
ADJUSTMENT  
+/- 15 DEG  
WITHOUT  
OPENING  
THE LUMINAIRE

## LIGHT BEAM OPTIONS



NARROW 15°

MEDIUM 30°

MEDIUM  
WIDE 35°


WIDE  
FLOOD 55°

WIDE  
FLOOD 60°

10x60°  
ELLIPTICAL

ASYMMETRIC  
WALL-WASHER

DIFFUSED

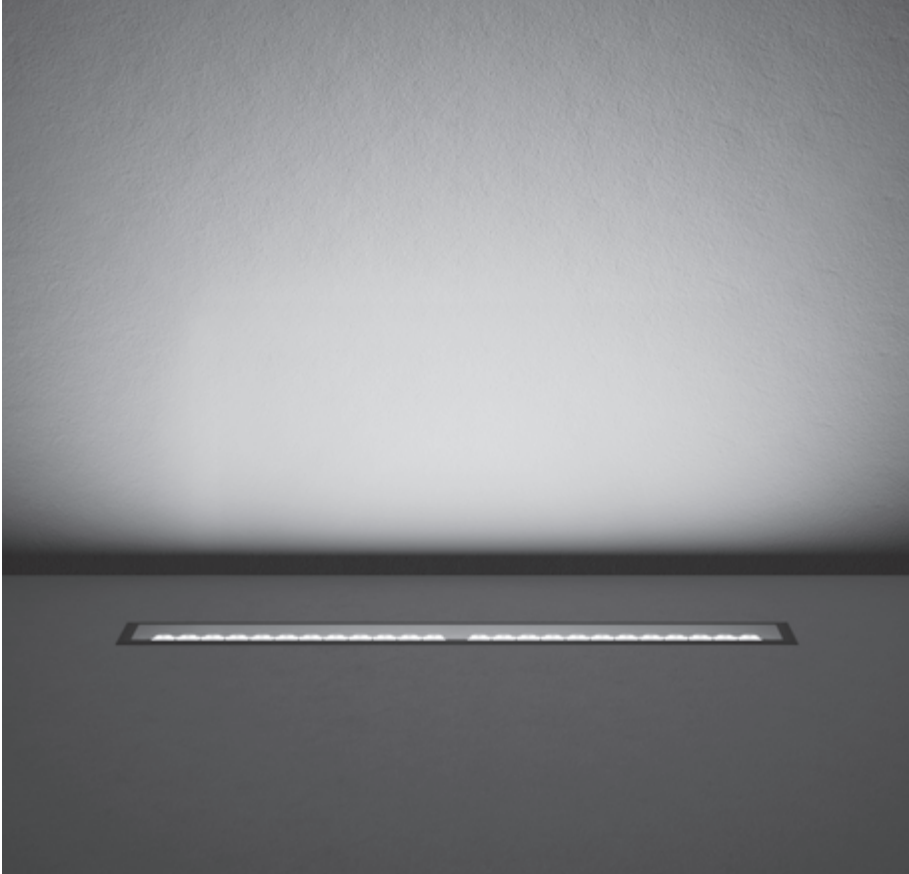


201101 - 201105 - 201109 - 201113

## LINEAGROUND HP

Linear shape ground-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.



201101



201105



201109



201113

### Technical features



Available on request



### Technical data

IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request





201101		LINEAGROUND 300 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	900	75.00	
high-power led	35°	870	72.50	
high-power led	55°	840	70.00	
high-power led	Asymmetric Wall-Washer	870	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	930	77.50	
high-power led	35°	900	75.00	
high-power led	55°	870	72.50	
high-power led	Asymmetric Wall-Washer	900	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	960	80.00	
high-power led	35°	930	77.50	
high-power led	55°	900	75.00	
high-power led	Asymmetric Wall-Washer	930	77.50	

**Finish color options:**

■ Matt Black




201105		LINEAGROUND 600 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	1800	75.00	
high-power led	35°	1740	72.50	
high-power led	55°	1680	70.00	
high-power led	Asymmetric Wall-Washer	1740	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	1860	77.50	
high-power led	35°	1800	75.00	
high-power led	55°	1740	72.50	
high-power led	Asymmetric Wall-Washer	1800	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	1920	80.00	
high-power led	35°	1860	77.50	
high-power led	55°	1800	75.00	
high-power led	Asymmetric Wall-Washer	1860	77.50	


**Finish color options:**

■ Matt Black

**LUMINAIRE**



**RECESS HOUSING**




**Technical data**

Class	⊕
Wattage	12 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	3,00 Kg

**LUMINAIRE**



**RECESS HOUSING**

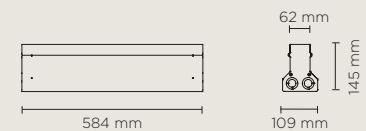

**Technical data**

Class	⊕
Wattage	24 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	5,50 Kg




201109		LINEAGROUND 900 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	2.700	75.00	
high-power led	35°	2.610	72.50	
high-power led	55°	2.520	70.00	
high-power led	Asymmetric Wall-Washer	2.610	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	2.790	77.50	
high-power led	35°	2.700	75.00	
high-power led	55°	2.610	72.50	
high-power led	Asymmetric Wall-Washer	2.700	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	2.880	80.00	
high-power led	35°	2.790	77.50	
high-power led	55°	2.700	75.00	
high-power led	Asymmetric Wall-Washer	2.790	77.50	


**Finish color options:**

■ Matt Black

LUMINAIRE



RECESS HOUSING



**Technical data**

Class	⊕
Wattage	36 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	7,00 Kg




201113		LINEAGROUND 1200 HP		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>2700°K warm-white</b>				
high-power led	15°	3.600	75.00	
high-power led	35°	3.480	72.50	
high-power led	55°	3.360	70.00	
high-power led	Asymmetric Wall-Washer	3.480	72.50	
<b>3000°K warm-white</b>				
high-power led	15°	3.720	77.50	
high-power led	35°	3.600	75.00	
high-power led	55°	3.480	72.50	
high-power led	Asymmetric Wall-Washer	3.600	75.00	
<b>4000°K neutral-white</b>				
high-power led	15°	3.840	80.00	
high-power led	35°	3.720	77.50	
high-power led	55°	3.600	75.00	
high-power led	Asymmetric Wall-Washer	3.720	77.50	


**Finish color options:**

■ Matt Black

LUMINAIRE



RECESS HOUSING



**Technical data**

Class	⊕
Wattage	48 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	9,50 Kg

## ACCESSORIES

AC132-300

MICROLOUVRE 300

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

MICROLOUVRE 600

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

MICROLOUVRE 900

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

MICROLOUVRE 1200

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

FEED CABLE 1 MT. ON/OFF

Initial cable 3 core, to start an in-line installation, cable length 1 meter.  
Open wires for mains connection and IP68 connector for fixture connection.



AC134

FEED CABLE 1 MT. DALI

Initial cable 5 core, to start an in-line DALI installation, cable length 1 meter.  
Open wires for mains connection and IP68 connector for fixture connection.



AC135

JUMPER CABLE 2 MT. ON/OFF

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC136

JUMPER CABLE 2 MT. DALI

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC137

JUMPER CABLE 4 MT. ON/OFF

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).



AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.




AC140

END CAP DALI

End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).




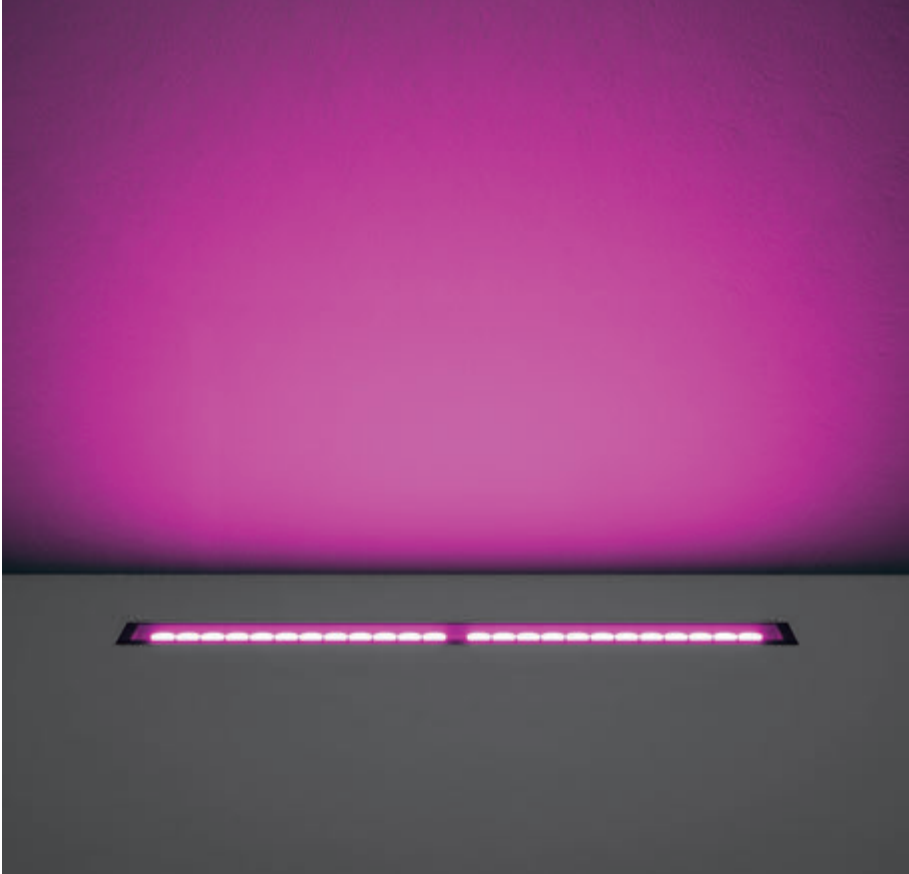


201102 - 201106 - 201110 - 201114

## LINEAGROUND HP DMX RGBW


Linear shape ground-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz (except for smaller length 310mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with RGBW(3000K) 3535 LED. IP67 rating.




201102



201106



201110



201114

### Technical features



### Available on request



### Technical data


IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included



LUMINAIRE



RECESS HOUSING



201102		LINEAGROUND 300 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	380	38.00	
high-power led	30°	365	36.50	
high-power led	60°	335	33.50	
high-power led	10x60° ELLIPTICAL	365	36.50	


Finish color options:

■ Matt Black


Technical data

Class	⚡
Wattage	10 WATT
Light Source	Nr. 12 RGBW 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	3,00 Kg

LUMINAIRE



RECESS HOUSING

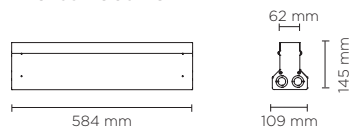

201106		LINEAGROUND 600 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	760	38.00	
high-power led	30°	730	36.50	
high-power led	60°	670	33.50	
high-power led	10x60° ELLIPTICAL	730	36.50	



Finish color options:

■ Matt Black


Technical data

Class	⚡
Wattage	20 WATT
Light Source	Nr. 24 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	5,50 Kg

LUMINAIRE



RECESS HOUSING



201110		LINEAGROUND 900 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	1.140	38.00	
high-power led	30°	1.095	36.50	
high-power led	60°	1.005	33.50	
high-power led	10x60° ELLIPTICAL	1.095	36.50	



Finish color options:

■ Matt Black


Technical data

Class	⊕
Wattage	30 WATT
Light Source	NR. 36 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	7,00 Kg

LUMINAIRE



RECESS HOUSING



201114		LINEAGROUND 1200 HP DMX RGBW		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>RGBW 3000K</b>				
high-power led	15°	1.520	38.00	
high-power led	30°	1.460	36.50	
high-power led	60°	1.340	33.50	
high-power led	10x60° ELLIPTICAL	1.460	36.50	

Finish color options:

■ Matt Black

Technical data

Class	⊕
Wattage	40 WATT
Light Source	Nr. 48 RGBW 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	9,50 Kg

## ACCESSORIES

AC132-300

**MICROLOUVRE 300**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

**MICROLOUVRE 600**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

**MICROLOUVRE 900**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

**MICROLOUVRE 1200**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

**FEED CABLE 1 MT.**

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

**JUMPER CABLE 2 MT.**

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC137

**JUMPER CABLE 4 MT.**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).




AC139

**END CAP**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.




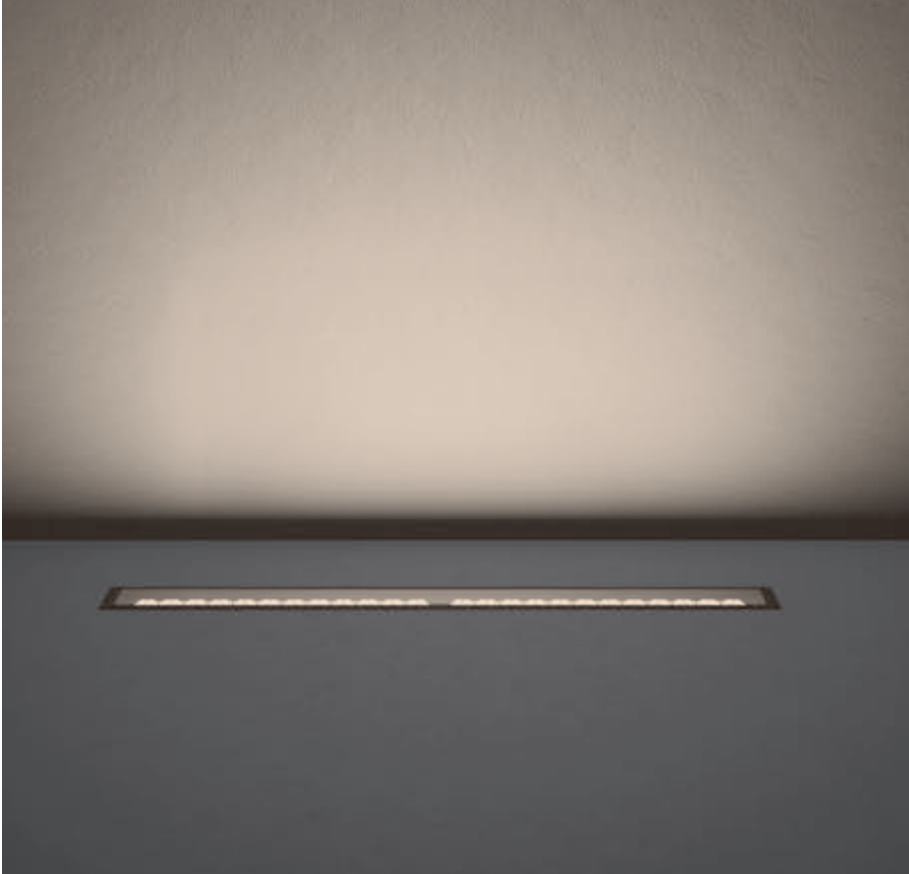


201103 - 201107 - 201111 - 201115

## LINEAGROUND HP DMX TUNABLE WHITE


Linear shape ground-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz (except for smaller length 310mm which requires remote constant voltage 24V DC power supply), DMX interface integrated, with Tunable White 3535 LED. IP67 rating.



201103



201107



201111



201115

### Technical features




### Available on request




### Technical data


IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
DMX cable	DMX in & DMX out cables included

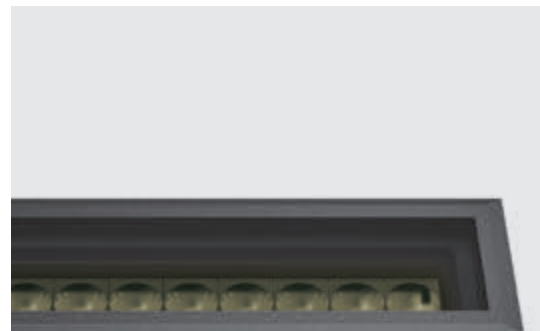

## LUMINAIRE



## RECESS HOUSING



201103	LINEAGROUND 300 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	650	65.00
high-power led	30°	635	63.50
high-power led	60°	620	62.00
high-power led	10x60° ELLIPTICAL	635	63.50


## Finish color options:

■ Matt Black


## Technical data

Class	◆
Wattage	10 WATT
Light Source	Nr. 12 TUNABLE WHITE 3535 LED
Transformer	Constant voltage 24V DC remote driver needed
Gross weight	3,00 Kg

## LUMINAIRE



## RECESS HOUSING



201107	LINEAGROUND 600 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	1.300	65.00
high-power led	30°	1.270	63.50
high-power led	60°	1.240	62.00
high-power led	10x60° ELLIPTICAL	1.270	63.50


## Finish color options:

■ Matt Black


## Technical data

Class	⊕
Wattage	20 WATT
Light Source	Nr. 24 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	5,50 Kg

LUMINAIRE



RECESS HOUSING



201111	LINEAGROUND 900 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	1.950	65.00
high-power led	30°	1.905	63.50
high-power led	60°	1.860	62.00
high-power led	10x60° ELLIPTICAL	1.905	63.50

Finish color options:

■ Matt Black

Technical data

Class	⊕
Wattage	30 WATT
Light Source	NR. 36 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	7,00 Kg

LUMINAIRE



RECESS HOUSING



201115	LINEAGROUND 1200 HP DMX TUNABLE-WHITE		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700K-5600K TUNABLE WHITE</b>			
high-power led	15°	2.600	65.00
high-power led	30°	2.540	63.50
high-power led	60°	2.480	62.00
high-power led	10x60° ELLIPTICAL	2.540	63.50

Finish color options:

■ Matt Black

Technical data

Class	⊕
Wattage	40 WATT
Light Source	Nr. 48 TUNABLE-WHITE 3535 LED
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gross weight	9,50 Kg

## ACCESSORIES

AC132-300

**MICROLOUVRE 300**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-600

**MICROLOUVRE 600**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-900

**MICROLOUVRE 900**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC132-1200

**MICROLOUVRE 1200**

Anti-glare grid that sections the light beam into microcells, adding visual comfort without compromising the quality or homogeneity of the light.



AC133

**FEED CABLE 1 MT.**

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.



AC135

**JUMPER CABLE 2 MT.**

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC137

**JUMPER CABLE 4 MT.**

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).



AC139

**END CAP**

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.





201104 - 201108 - 201112 - 201116

## LINEAGROUND DIFFUSED

Linear shape ground-recessed luminaire for outdoor installation, four available lengths (310mm, 600mm, 900mm, 1200mm) made in phospho-chromatised, anodized and polyester powder coated extruded copper-free aluminium, with tempered safety glass, moulded silicone gaskets, extruded aluminum back box. Light source tilt system +/- 15deg from outside. Built-in LED driver 220-240V 50-60Hz, with SAMSUNG 3030 LED. IP67 rating.




201104



201108



201112



201116

### Technical features




NEW

Available on request


DALI

### Technical data


IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance extruded copper-free aluminum
Coating	anodizing treatment + protective powder coating
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG9 cable gland
Power cable	1 mt. neoprene power cable included, in & out cable for loop-in loop-out connection available on request

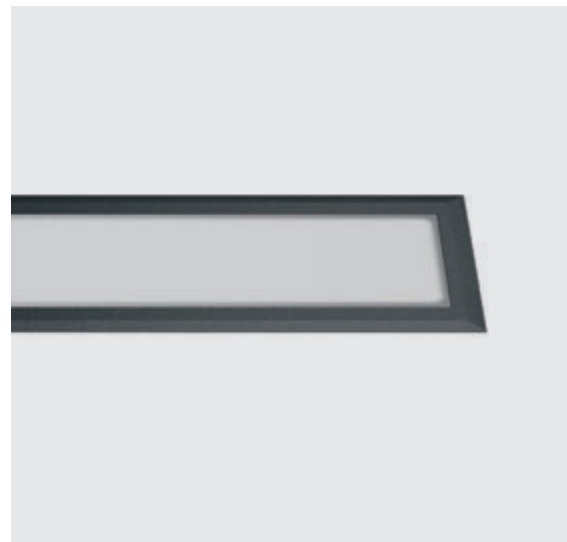

## LUMINAIRE



## RECESS HOUSING



201104	LINEAGROUND 300 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	300	37.50
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	310	38.75
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	330	41.25


## Finish color options:

■ Matt Black


## Technical data

Class	⊕
Wattage	8 WATT
Light Source	Nr. 12 SAMSUNG 3030 LED
Gross weight	3,00 Kg

## LUMINAIRE



## RECESS HOUSING

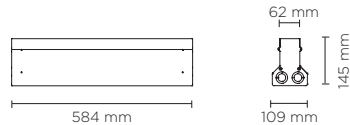

201108	LINEAGROUND 600 DIFFUSED		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	500	41.66
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	520	43.33
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	550	45.83


## Finish color options:

■ Matt Black


## Technical data

Class	⊕
Wattage	12 WATT
Light Source	Nr. 24 SAMSUNG 3030 LED
Gross weight	5,50 Kg

LUMINAIRE



RECESS HOUSING



201112		LINEAGROUND 900 DIFFUSED	
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	780	45.88
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	800	47.06
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	830	48.80



#### Finish color options:

■ Matt Black


#### Technical data

Class	⊕
Wattage	17 WATT
Light Source	Nr. 36 SAMSUNG 3030 LED
Gross weight	7,00 Kg

LUMINAIRE



RECESS HOUSING



201116		LINEAGROUND 1200 DIFFUSED	
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
high-power led	DIFFUSED	1.010	42.08
<b>3000°K warm-white</b>			
high-power led	DIFFUSED	1.050	43.75
<b>4000°K neutral-white</b>			
high-power led	DIFFUSED	1.100	45.83

#### Finish color options:

■ Matt Black

#### Technical data

Class	⊕
Wattage	24 WATT
Light Source	Nr. 48 SAMSUNG 3030 LED
Gross weight	9,50 Kg

## ACCESSORIES

---

AC133

FEED CABLE 1 MT. ON/OFF

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.

---



AC134

FEED CABLE 1 MT. DALI

Initial cable 3 core, to start an in-line installation, cable length 1 meter. Open wires for mains connection and IP68 connector for fixture connection.

---



AC135

JUMPER CABLE 2 MT. ON/OFF

2 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

---



AC136

JUMPER CABLE 2 MT. DALI

2 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

---



AC137

JUMPER CABLE 4 MT. ON/OFF

4 meters length extension, 3 core cable with male and female IP68 connectors (end to end).

---



AC138

JUMPER CABLE 4 MT. DALI

4 meters length extension, 5 core DALI cable with male and female IP68 connectors (end to end).

---



AC139

END CAP ON/OFF

End cap for connectors, to terminate the in-line installation of light fixture equipped with 3 core cable.

---



AC140

END CAP DALI


End cap for connectors, to terminate the in-line installation of light fixture equipped with 5 core cable (DALI).

---




# LINEAGROUND "CONTINUOUS LINE" SYSTEM

## EXAMPLE OF A 3 UNITS SYSTEM

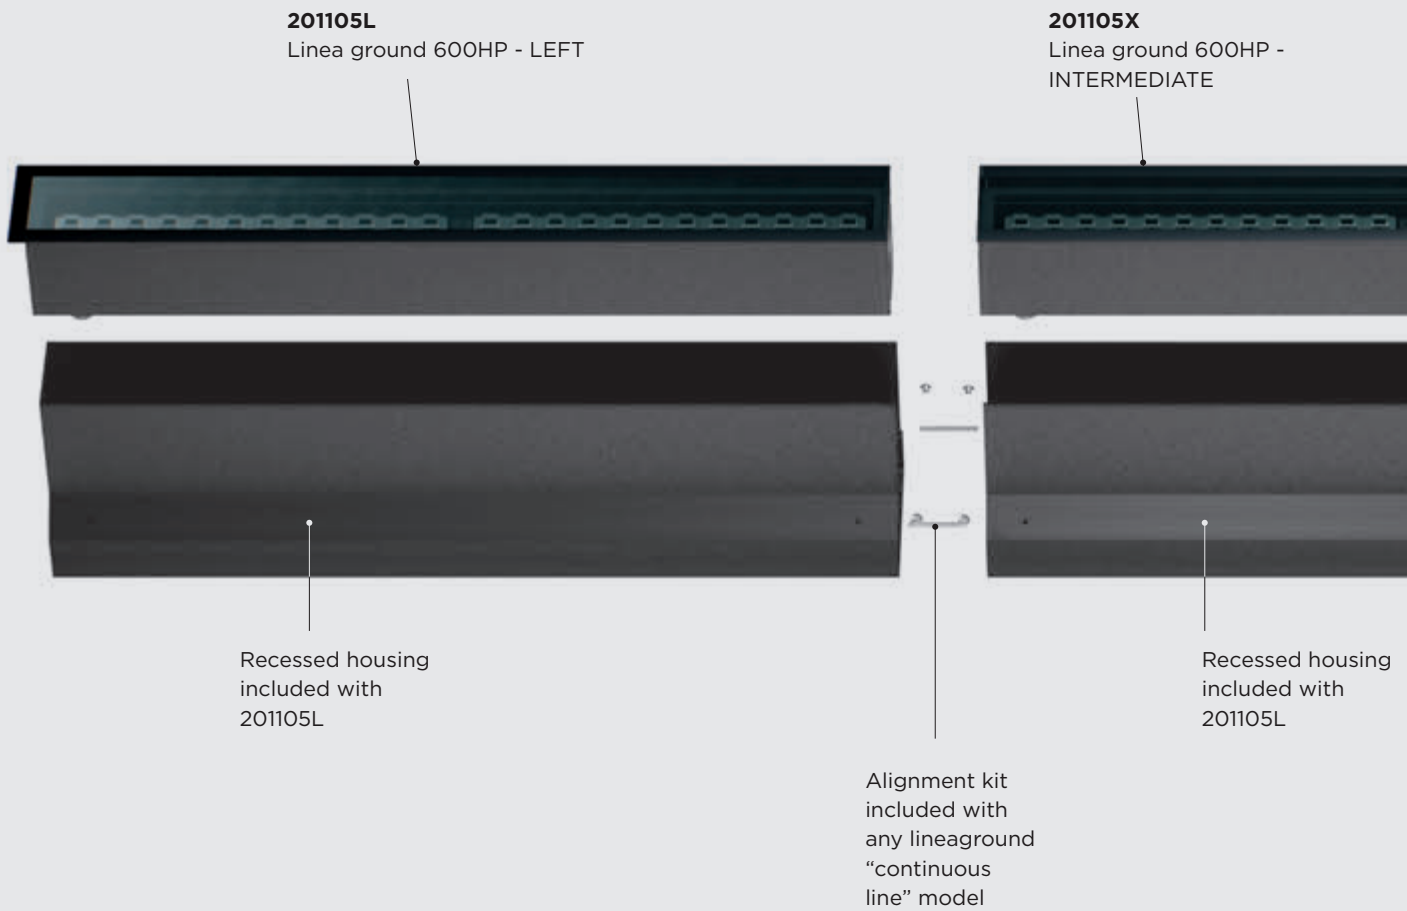

**201105R**  
Linea ground 600HP - RIGHT

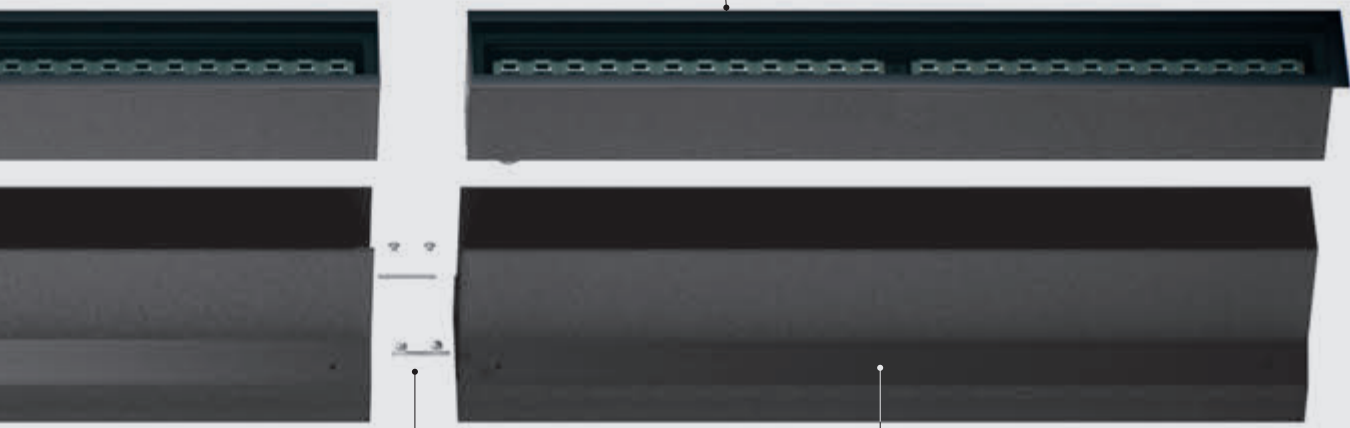

Recessed housing  
included with 201105L

Alignment kit  
included with  
any lineaground  
"continuous  
line" model



201100 LINEAGROUND "CONTINUOUS LINE" (SYSTEM)	
201101L	LINEAGROUND 300 HP - LEFT
201101R	LINEAGROUND 300 HP - RIGHT
201101X	LINEAGROUND 300 HP - INTERMEDIATE
201102L	LINEAGROUND 300 HP DMX RGBW - LEFT
201102R	LINEAGROUND 300 HP DMX RGBW - RIGHT
201102X	LINEAGROUND 300 HP DMX RGBW - INTERMEDIATE
201103L	LINEAGROUND 300 HP DMX TUNABLE-WHITE - LEFT
201103R	LINEAGROUND 300 HP DMX TUNABLE-WHITE - RIGHT
201103X	LINEAGROUND 300 HP DMX TUNABLE-WHITE INTERMEDIATE
201104L	LINEAGROUND 300 DIFFUSED - LEFT
201104R	LINEAGROUND 300 DIFFUSED - RIGHT
201104X	LINEAGROUND 300 DIFFUSED - INTERMEDIATE
201105L	LINEAGROUND 600 HP - LEFT
201105R	LINEAGROUND 600 HP - RIGHT
201105X	LINEAGROUND 600 HP - INTERMEDIATE
201106L	LINEAGROUND 600 HP DMX RGBW - LEFT
201106R	LINEAGROUND 600 HP DMX RGBW - RIGHT
201106X	LINEAGROUND 600 HP DMX RGBW - INTERMEDIATE
201107L	LINEAGROUND 600 HP DMX TUNABLE-WHITE - LEFT
201107R	LINEAGROUND 600 HP DMX TUNABLE-WHITE - RIGHT
201107X	LINEAGROUND 600 HP DMX TUNABLE-WHITE INTERMEDIATE
201108L	LINEAGROUND 600 DIFFUSED - LEFT
201108R	LINEAGROUND 600 DIFFUSED - RIGHT
201108X	LINEAGROUND 600 DIFFUSED INTERMEDIATE
201109L	LINEAGROUND 900 HP - LEFT
201109R	LINEAGROUND 900 HP - RIGHT
201109X	LINEAGROUND 900 HP - INTERMEDIATE
201110L	LINEAGROUND 900 HP DMX RGBW - LEFT
201110R	LINEAGROUND 900 HP DMX RGBW - RIGHT
201110X	LINEAGROUND 900 HP DMX RGBW INTERMEDIATE
201111L	LINEAGROUND 900 HP DMX TUNABLE-WHITE - LEFT
201111R	LINEAGROUND 900 HP DMX TUNABLE-WHITE - RIGHT
201111X	LINEAGROUND 900 HP DMX TUNABLE-WHITE INTERMEDIATE



<b>201112L</b>	LINEAGROUND 900 DIFFUSED - LEFT
<b>201112R</b>	LINEAGROUND 900 DIFFUSED - RIGHT
<b>201112X</b>	LINEAGROUND 900 DIFFUSED - INTERMEDIATE
<b>201113L</b>	LINEAGROUND 1200 HP - LEFT
<b>201113R</b>	LINEAGROUND 1200 HP - RIGHT
<b>201113X</b>	LINEAGROUND 1200 HP - INTERMEDIATE
<b>201114L</b>	LINEAGROUND 1200 HP DMX RGBW - LEFT
<b>201114R</b>	LINEAGROUND 1200 HP DMX RGBW - RIGHT
<b>201114X</b>	LINEAGROUND 1200 HP DMX RGBW - INTERMEDIATE
<b>201115L</b>	LINEAGROUND 1200 HP DMX TUNABLE-WHITE - LEFT
<b>201115R</b>	LINEAGROUND 1200 HP DMX TUNABLE-WHITE - RIGHT
<b>201115X</b>	LINEAGROUND 1200 HP DMX TUNABLE-WHITE INTERMEDIATE
<b>201116L</b>	LINEAGROUND 1200 DIFFUSED - LEFT
<b>201116R</b>	LINEAGROUND 1200 DIFFUSED - RIGHT
<b>201116X</b>	LINEAGROUND 1200 DIFFUSED - INTERMEDIATE

#### ACCESSORIES LINEAGROUND / LINEAGROUND TRIMLESS / LINEAGROUND CONTINUOUS LINE

<b>AC132-300</b>	MICROLOUVRE 300
<b>AC132-600</b>	MICROLOUVRE 600
<b>AC132-900</b>	MICROLOUVRE 900
<b>AC132-1200</b>	MICROLOUVRE 1200
<b>AC133</b>	FEED CABLE 1 MT. ON/OFF
<b>AC134</b>	FEED CABLE 1 MT. DALI
<b>AC135</b>	JUMPER CABLE 2 MT. ON/OFF
<b>AC136</b>	JUMPER CABLE 2 MT. DALI
<b>AC137</b>	JUMPER CABLE 4 MT. ON/OFF
<b>AC138</b>	JUMPER CABLE 4 MT. DALI
<b>AC139</b>	END CAP ON/OFF
<b>AC140</b>	END CAP DALI