




Flexa Sphera

Nava + Arosio



PRODUCT WEIGHT 080 kg



Flexa Sphera Small 800

Code Example

905001, .27, .DF, .07, .0

Accessories p. 411

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist flexible stainless-steel bollard structure and a distinctive glass element that softens and diffuses the emitted light. All structural parts are phospho-chromatised and polyester powder coated. Total height 840 mm. Remote constant voltage 24V DC power supply needed. IP66 rating.



905001
3W
Transparent Glass

CCT	Beam Angle	lm	lm/w	Finish	Dimming
.27 2700°K	.DF diffused	110	36.60	.07 Obsidian Black	.0 ON/OFF
.30 3000°K	.DF diffused	120	40.00		
.40 4000°K	.DF diffused	140	46.60		




905002
3W
Opal Glass

CCT	Beam Angle	lm	lm/w	Finish	Dimming
.27 2700°K	.DF diffused	110	36.60	.07 Obsidian Black	.0 ON/OFF
.30 3000°K	.DF diffused	120	40.00		
.40 4000°K	.DF diffused	140	46.60		

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
Meanwell	LPV-20-24	Contant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	Contant voltage 24V DC	35W	IP67	min 1 - max 8



PRODUCT WEIGHT 1,00 kg



Code Example

905003.**.27**.**.DF**.**.07**.**.0**

Accessories p. 411

Flexa Sphera Small 1100

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist flexible stainless-steel bollard structure and a distinctive glass element that softens and diffuses the emitted light. All structural parts are phospho-chromatised and polyester powder coated. Total height 1140 mm. Remote constant voltage 24V DC power supply needed. IP66 rating.



905003
3W
Transparent Glass

CCT	Beam Angle	lm	lm/w
.27 2700°K	.DF diffused	110	36.60
.30 3000°K	.DF diffused	120	40.00
.40 4000°K	.DF diffused	140	46.60

Finish **.07** Obsidian Black Dimming **.0** ON/OFF





905004
3W
Opal Glass

CCT	Beam Angle	lm	lm/w
.27 2700°K	.DF diffused	110	36.60
.30 3000°K	.DF diffused	120	40.00
.40 4000°K	.DF diffused	140	46.60

Finish **.07** Obsidian Black Dimming **.0** ON/OFF

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
Meanwell	LPV-20-24	Contant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	Contant voltage 24V DC	35W	IP67	min 1 - max 8

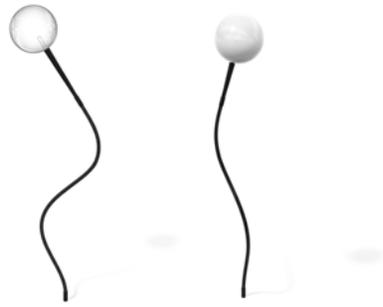

PRODUCT WEIGHT 0,90 kg



Flexa Sphera Big 800

Code Example

905005.**.27**.**.DF**.**.07**.**.0**

Accessories p. 411

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist flexible stainless-steel bollard structure and a distinctive glass element that softens and diffuses the emitted light. All structural parts are phospho-chromatised and polyester powder coated. Total height 920 mm. Remote constant voltage 24V DC power supply needed. IP66 rating.



905005
3W
Transparent Glass

CCT	Beam Angle	lm	lm/w
.27 2700°K	.DF diffused	110	36.60
.30 3000°K	.DF diffused	120	40.00
.40 4000°K	.DF diffused	140	46.60

Finish: **.07** Obsidian Black
Dimming: **.0** ON/OFF



905006
3W
Opal Glass



CCT	Beam Angle	lm	lm/w
.27 2700°K	.DF diffused	110	36.60
.30 3000°K	.DF diffused	120	40.00
.40 4000°K	.DF diffused	140	46.60

Finish: **.07** Obsidian Black
Dimming: **.0** ON/OFF

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
Meanwell	LPV-20-24	Contant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	Contant voltage 24V DC	35W	IP67	min 1 - max 8





PRODUCT WEIGHT 1,10 kg



Flexa Sphera Big 1100

Code Example

905007.27.DF.07.0

Accessories p. 411

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist flexible stainless-steel bollard structure and a distinctive glass element that softens and diffuses the emitted light. All structural parts are phospho-chromatised and polyester powder coated. Total height 1220 mm. Remote constant voltage 24V DC power supply needed. IP66 rating.



905007
3W
Transparent Glass

CCT	Beam Angle	lm	lm/w
.27 2700°K	.DF diffused	110	36.60
.30 3000°K	.DF diffused	120	40.00
.40 4000°K	.DF diffused	140	46.60

Finish: **.07** Obsidian Black
Dimming: **.0** ON/OFF



905008
3W
Opal Glass

CCT	Beam Angle	lm	lm/w
.27 2700°K	.DF diffused	110	36.60
.30 3000°K	.DF diffused	120	40.00
.40 4000°K	.DF diffused	140	46.60

Finish: **.07** Obsidian Black
Dimming: **.0** ON/OFF

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
Meanwell	LPV-20-24	Contant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	Contant voltage 24V DC	35W	IP67	min 1 - max 8

ACCESSORIES NOT INCLUDED

Accessories to be ordered separately.



AC146

SPIKE

Stainless steel ground spike.

Compatible for all products of the series.