




PRODUCT WEIGHT 0,30 kg



Hydrofloor Nano XXS All-Glass

Code Example

201081 · .27 · .15 · GL · 0

Accessories p. 90


Round ground-recessed luminaire for outdoor installation flush with the ground, hard anodized black aluminium body and cover/diffuser made entirely in tempered safety glass, moulded silicone gasket. Remote constant current 350 mA driver needed, with 1 CREE XP-G2 LED. IP68 rating.


201081
1W

CCT	Beam Angle	lm	lm/w	Finish	Dimming
.27 2700°K	.15 15°	71	71.00	.GL <input type="checkbox"/> Clear Glass	.0 ON/OFF
	.30 30°	62	62.00		
	.45 45°	57	57.00		
.30 3000°K	.15 15°	75	75.00		
	.30 30°	65	65.00		
	.45 45°	60	60.00		
.40 4000°K	.15 15°	80	80.00		
	.30 30°	70	70.00		
	.45 45°	65	65.00		

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
ALVIT Italy	AL1435S-IP	constant current 350mA	14W	IP67	min 1 - max 8
Meanwell	LPC-20-350	constant current 350mA	16.8W	IP67	min 4 - max 12

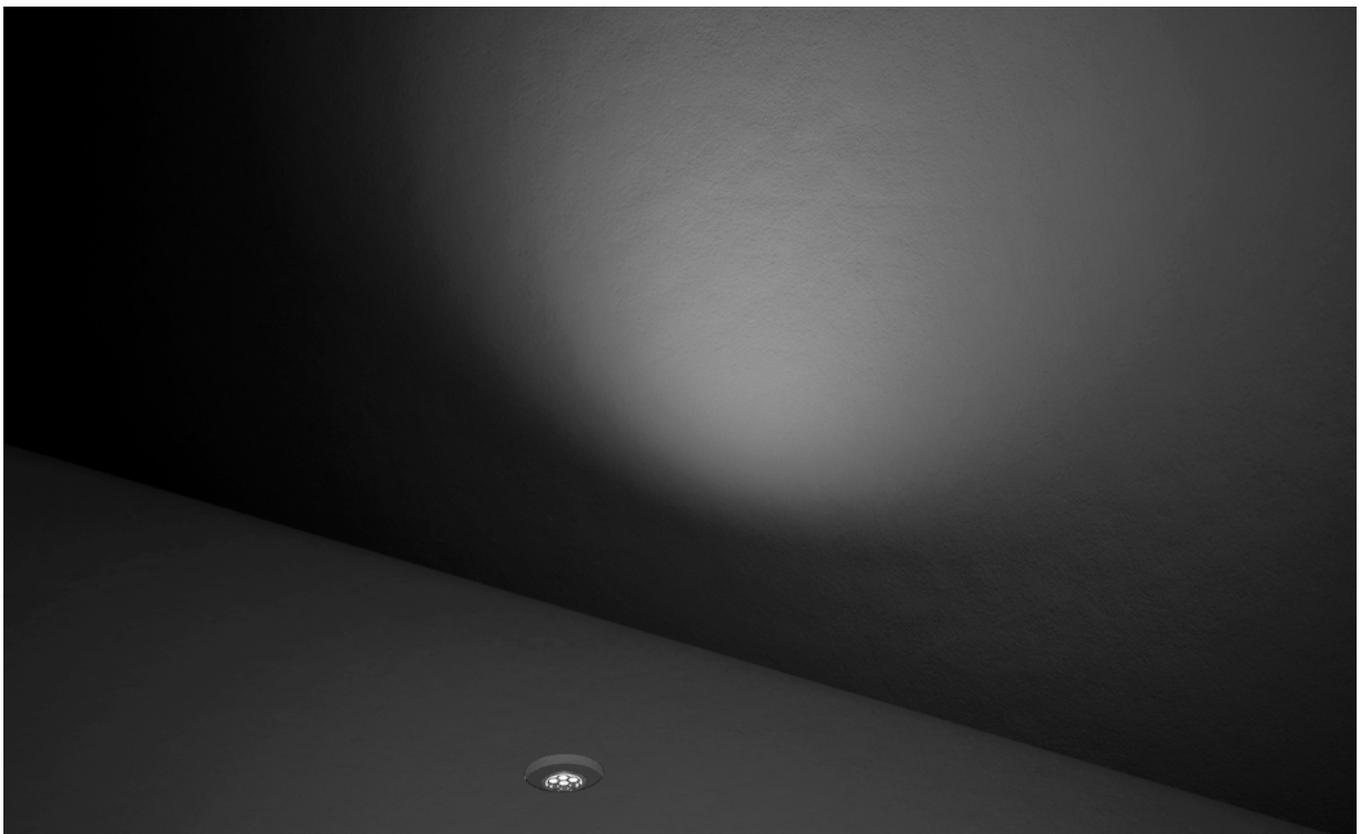



PRODUCT WEIGHT 0,90 kg



Hydrofloor Nano XS All-Glass

Round ground-recessed luminaire for outdoor installation flush with the ground, hard anodized black aluminium body and cover/diffuser made entirely in tempered safety glass, moulded silicone gasket. Remote constant current max 700 mA driver needed, with 1 CREE XP-L LED. IP68 rating.

Code Example

201082 .27 .10 .GL .0

Accessories p. 90


201082
Max 2,5W

CCT	Beam Angle	Finish	Dimming
.27 2700°K	.10 10°	.GL <input type="checkbox"/> Clear Glass	.0 ON/OFF
	.30 30°		
	.45 45°		
.30 3000°K	.10 10°		
	.30 30°		
	.45 45°		
.40 4000°K	.10 10°		
	.30 30°		
	.45 45°		

CCT	Beam Angle	350 mA LED POWER 1.2W		500 mA LED POWER 1.7W		700 mA LED POWER 2.5W	
		lm	lm/w	lm	lm/w	lm	lm/w
2700°K	10°	131	109.00	186	109.00	274	109.00
	30°	124	103.00	178	105.00	261	104.00
	45°	118	98.00	168	99.00	247	99.00
3000°K	10°	138	115.00	196	115.00	288	115.00
	30°	132	110.00	187	110.00	275	110.00
	45°	125	104.00	177	104.00	260	104.00
4000°K	10°	144	120.00	204	120.00	300	120.00
	30°	137	114.00	194	114.00	285	114.00
	45°	131	109.00	186	109.00	273	109.00

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
ALVIT Italy	AL1435S-IP	constant current 350mA	14W	IP67	min 1 - max 8
ALVIT Italy	AL1450S-IP	constant current 500mA	14W	IP67	min 1 - max 6
ALVIT Italy	AL1470S-IP	constant current 700mA	14W	IP67	min 1 - max 4



PRODUCT WEIGHT 1,10 kg



Hydrofloor Nano All-Glass

Code Example

201083.27.04.GL.0

Accessories p. 90

Round ground-recessed luminaire for outdoor installation flush with the ground, hard anodized black aluminium body and cover/diffuser made entirely in tempered safety glass, moulded silicone gasket. Remote constant current max 700 mA driver needed, with 1 CREE XHP35 HD LED. IP68 rating.

201083

Max 10W

CCT	Beam Angle	Finish	Dimming
.27 2700°K	.04 4°	.GL <input type="checkbox"/> Clear Glass	.0 ON/OFF
	.10 10°		
	.28 28°		
	.55 55°		
.30 3000°K	.04 4°		
	.10 10°		
	.28 28°		
	.55 55°		
.40 4000°K	.04 4°		
	.10 10°		
	.28 28°		
	.55 55°		

CCT	Beam Angle	350 mA LED POWER 5W		500 mA LED POWER 7W		700 mA LED POWER 10W	
		lm	lm/w	lm	lm/w	lm	lm/w
2700°K	4°	485	97.00	656	93.71	862	86.20
	10°	465	93.00	629	89.86	828	82.80
	28°	450	90.00	610	87.14	804	80.40
	55°	383	76.60	519	74.14	683	68.30
3000°K	4°	510	102.00	690	98.57	907	90.69
	10°	489	97.80	662	94.57	872	87.20
	28°	474	94.80	642	91.71	846	84.60
	55°	403	80.58	546	77.95	719	71.91
4000°K	4°	520	104.00	703	100.43	930	93.00
	10°	499	99.80	676	96.57	890	89.00
	28°	484	96.80	656	93.71	863	86.30
	55°	411	82.28	558	79.65	734	73.36


Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
ALVIT Italy	AL1435S-IP	constant current 350mA	14W	IP67	min 1 - max 2
ALVIT Italy	AL1450S-IP	constant current 500mA	14W	IP67	1
ALVIT Italy	AL1470S-IP	constant current 700mA	14W	IP67	1
TCI Italy	152014/350	constant current 350mA	17W	IP68	min 1 - max 3
TCI Italy	152014/500	constant current 500mA	24W	IP68	min 1 - max 3
TCI Italy	152014/700	constant current 700mA	30W	IP68	min 1 - max 3

INTEGRATED ACCESSORIES

201074 . 27 . 15 . SS . 0 . _ _ _

Built-in accessories to be requested when ordering
example 201074.27.15.SS.0.HC



.HC

HONEYCOMB

A honeycomb structure designed to shield the light beam, reduce glare, and eliminate direct exposure to the light source.

Available for:

HYDROFLOOR **NANO XXS**
HYDROFLOOR **NANO XS**
HYDROFLOOR **NANO**
HYDROFLOOR **NANO XXS ALL GLASS**
HYDROFLOOR **NANO XS ALL GLASS**
HYDROFLOOR **NANO ALL GLASS**



.GS

STANDARD GLARE SHIELD

Glare shield accessory made in hard anodized black aluminum, providing good balance in between glare control and light output.

Available for:

HYDROFLOOR **NANO XS**
HYDROFLOOR **NANO**
HYDROFLOOR **NANO XS ALL GLASS**
HYDROFLOOR **NANO ALL GLASS**



.SC

SUPER COMFORT GLARE SHIELD

Glare shield accessory made in hard anodized black aluminum, for applications requiring very reduced glaring; minimal light loss on the light surface but overall lumen output typically reduced by 50%.

Available for:

HYDROFLOOR **NANO XS**
HYDROFLOOR **NANO**
HYDROFLOOR **NANO XS ALL GLASS**
HYDROFLOOR **NANO ALL GLASS**