


Lucea

Nava + Arosio



Empty cage version



Opal glass diffuser

PRODUCT WEIGHT:
909001: 1,50 /kg
909002: 1,60 /kg



Code Example

909001, .27, .DF, .07, 0

Accessories p. 427

Lucea Petit

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist stainless-steel bollard structure and light head. All structural parts are phospho-chromatised and polyester powder coated. Total height 900 mm. Remote constant voltage 24V DC power supply needed. IP66 rating.



909001
3W
 Empty cage

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	110	36.60
.30 3000°K	.DF Diffused	120	40.00
.40 4000°K	.DF Diffused	140	46.60

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	



909002
3W
 Cage with opal glass diffuser


CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	110	36.60
.30 3000°K	.DF Diffused	120	40.00
.40 4000°K	.DF Diffused	140	46.60

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	

PRODUCT WEIGHT 1,60 kg

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
Meanwell	LPV-20-24	Contant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	Contant voltage 24V DC	35W	IP67	min 1 - max 8



Empty cage version



Opal glass diffuser

PRODUCT WEIGHT:
909003: 1,50 /kg
909004: 1,60 /kg



Lucea Petit 10°

Code Example

909003.27.DF.07.0

Accessories p. 427

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist stainless-steel bollard structure and light head. All structural parts are phospho-chromatised and polyester powder coated. Total height 900 mm. Remote constant voltage 24V DC power supply needed. IP66 rating.



909003
 Empty cage

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	110	36.60
.30 3000°K	.DF Diffused	120	40.00
.40 4000°K	.DF Diffused	140	46.60

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	



909004
 3W
 Cage with opal glass diffuser

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	110	36.60
.30 3000°K	.DF Diffused	120	40.00
.40 4000°K	.DF Diffused	140	46.60


Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	

Remote Driver Selection

Brand	Manufacturer code	Type	Watt	IP Rate	Number of fixtures
Meanwell	LPV-20-24	Contant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	Contant voltage 24V DC	35W	IP67	min 1 - max 8





Obsidian Black



Wild Green



Dark Brown



Empty cage version



Opal glass diffuser

PRODUCT WEIGHT:
909005: 4,50 /kg
909006: 4,70 /kg



Lucea Bollard

Code Example

909005.**27**.**DF**.**07**.**0**

Accessories p. 427

Outdoor lighting solution designed to guide and enhance exterior spaces with refined illumination. Featuring a minimalist stainless-steel bollard structure and light head. All structural parts are phospho-chromatised and polyester powder coated. Total height 1020 mm. With 1 direct 220-240V LUMENS “EDC 38C” COB LED IP66 rating.



909005
8W
 Empty cage

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	440	55.00
.30 3000°K	.DF Diffused	450	56.25
.40 4000°K	.DF Diffused	480	60.00

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	



909006
8W
 Cage with opal glass diffuser

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	440	55.00
.30 3000°K	.DF Diffused	450	56.25
.40 4000°K	.DF Diffused	480	60.00

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	



Obsidian Black




Wild Green



Dark Brown





Empty cage version



Opal glass diffuser

PRODUCT WEIGHT:
909007: 2,00 /kg
909008: 2,20 /kg



Lucea Wall

This wall-mounted luminaire translates the essential design of Lucea concept into a refined outdoor wall light. Featuring a stainless-steel wall fixing base and light head. All structural parts are phospho-chromatised and polyester powder coated. With 1 direct 220-240V LUMENS "EDC 38C" COB LED IP66 rating.

Code Example

909007.**.27**.**.DF**.**.07**.**.0**

Accessories p. 427



909007
8W
 Empty cage

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	440	55.00
.30 3000°K	.DF Diffused	450	56.25
.40 4000°K	.DF Diffused	480	60.00

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	



909008
8W
 Cage with opal glass diffuser

CCT	Beam Angle	Im	Im/w
.27 2700°K	.DF Diffused	440	55.00
.30 3000°K	.DF Diffused	450	56.25
.40 4000°K	.DF Diffused	480	60.00

Finish	Dimming
.07 Obsidian Black	.0 ON/OFF
.08 Wild Green	
.09 Dark Brown	




Obsidian Black



Wild Green



Dark Brown

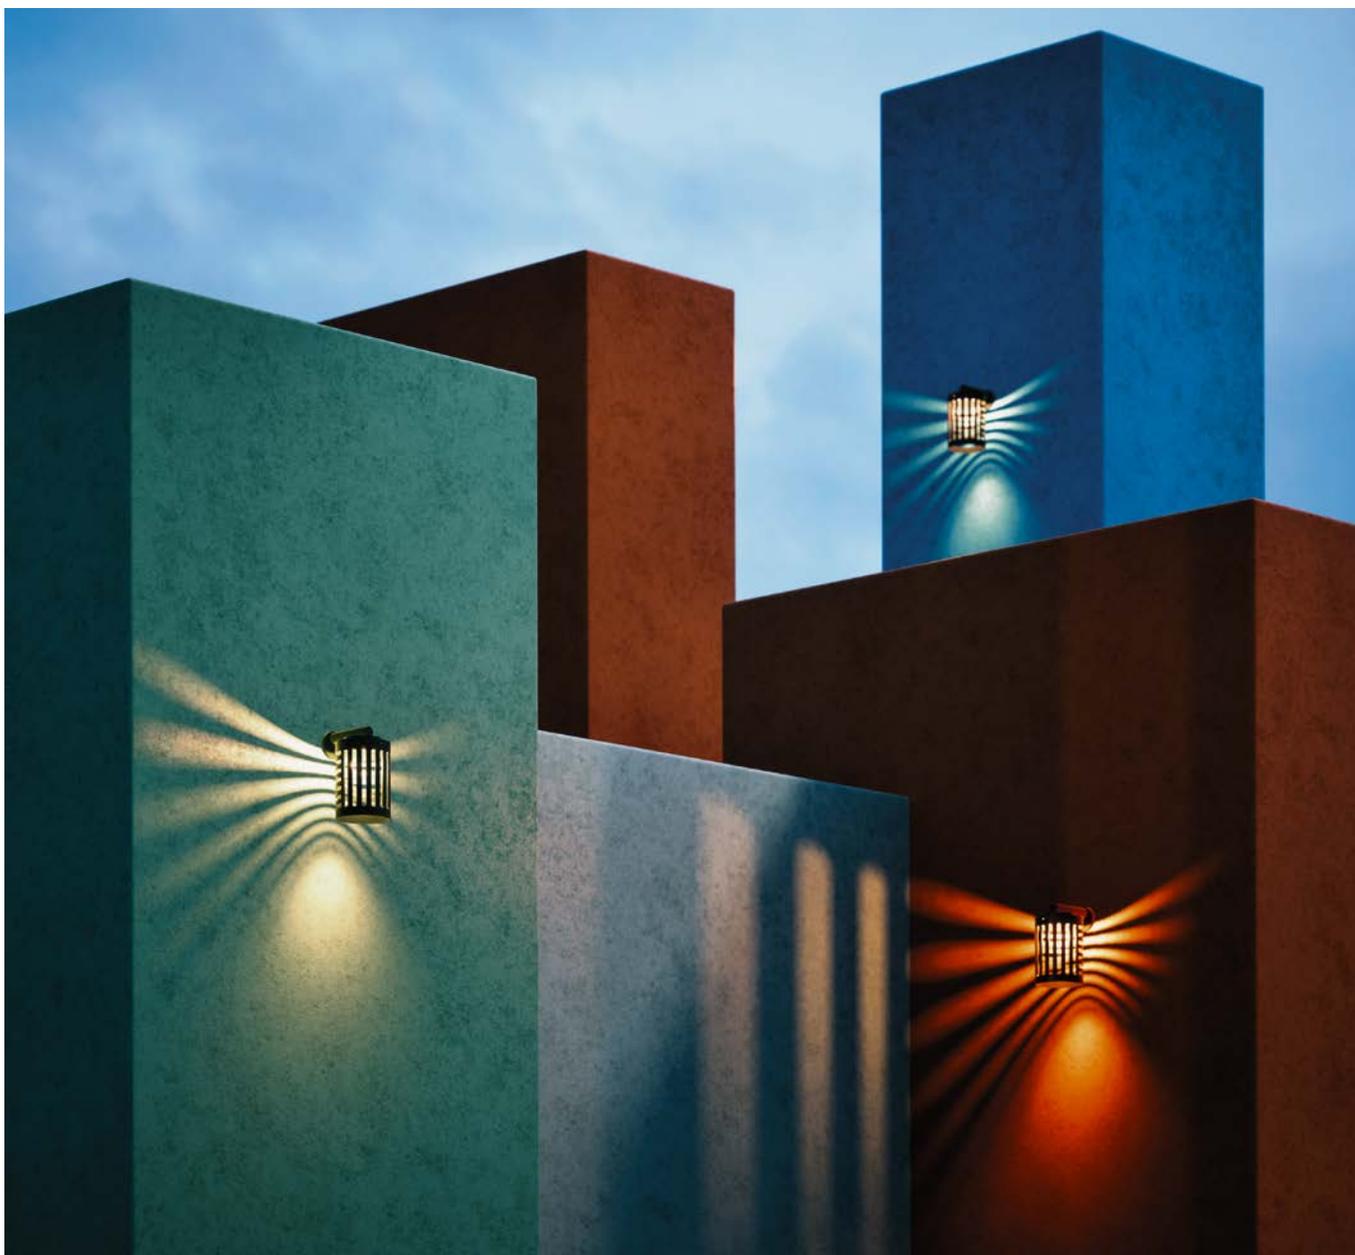

ACCESSORIES NOT INCLUDED

Accessories to be ordered separately.



AC146

SPIKE

Stainless steel ground spike.

Available for:

- ALL LUCEA **PETIT** ITEMS
- ALL LUCEA **BOLLARD** ITEMS



AC065

ANCHORAGE UNIT

Available for:

- ALL LUCEA **BOLLARD** ITEMS