


303004

## POOL MINI

Swimming-pool underwater luminaire, round shape, wall-recessed, completely made in stainless steel AISI 316L, polypropylene housing for recess. 24V remote driver needed, with 4 OSRAM LED. IP 68 rating.



**THIS LUMINAIRE IS SUITABLE ONLY FOR UNDERWATER INSTALLATION**

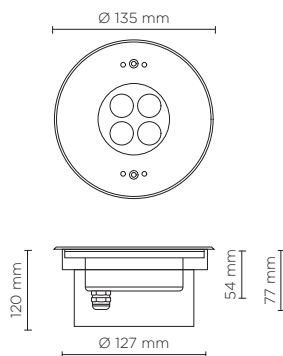

| light source             | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--------------------------|--------------------|-------------------|------------------------|
| <b>3000°K warm-white</b> |                    |                   |                        |
| high-power led           | M 30°              | 415               | 51.87                  |

### Finish color options:

Stainless Steel

### remote driver selection

| brand    | manufacturer code | type                    | watt | IP rate | numbers of fixtures |
|----------|-------------------|-------------------------|------|---------|---------------------|
| Meanwell | LPV-20-24         | constant voltage 24V DC | 20W  | IP67    | min 1 - max 2       |
| Meanwell | LPV-35-24         | constant voltage 24V DC | 35W  | IP67    | min 1 - max 3       |
| Meanwell | LPV-60-24         | constant voltage 24V DC | 60W  | IP67    | min 1 - max 6       |
| Meanwell | LPV-100-24        | constant voltage 24V DC | 100W | IP67    | min 1 - max 11      |

### Technical features



### Technical data

|                |  |
|----------------|--|
| Wattage        | 8 WATT   |
| IP Rating      | IP68 - 1 METERS DEPTH                                      |
| IK Rating      | IK09   |
| Material       | Completely made in stainless steel AISI 316 L marine grade |
| Trim           | Stainless steel AISI 316 L marine grade                    |
| Light source   | NR. 4 x 2W OSRAM LED                                       |
| Screws         | Stainless steel  |
| Remote driver  | 24V DC NEEDED  |
| Gasket         | EPDM rubber  |
| Glass          | Tempered   |
| Cable gland    | PG11 made in nickel-plated brass.                          |
| Power cable    | 2 mt. neoprene power cable included                        |
| Recess housing | Made in polypropylene                                      |
| Gross weight   | 1,30 Kg  |

