

403202

WALLBOX MINI SYMMETRIC 01

Wall applique for outdoor wall installation, with one side light distribution. Luminaire body is made of extruded copper-free aluminum, secured with die-cast aluminum base, tempered safety glass and stainless steel screws. Symmetrical wide light distribution. Built-in LED driver 220-240V 50-60Hz, with 20 x mid-power SAMSUNG 2835 LED. IP66 rating.

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|---------------------|-------------------|------------------------|
| 2700°K warm-white | | | |
| mid-power led | SYMMETRIC WIDE 110° | 560 | 70.00 |
| 3000°K warm-white | | | |
| mid-power led | SYMMETRIC WIDE 110° | 570 | 71.25 |
| 4000°K neutral-white | | | |
| mid-power led | SYMMETRIC WIDE 110° | 590 | 73.75 |

Finish color options:

Textured Grey RAL 9006


Anthracite Grey RAL 7016

Matt Black (on request)

Technical features



Available on request

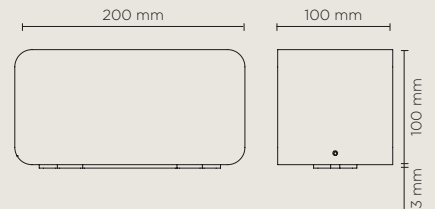

Technical data

| | |
|--------------|---|
| Wattage | 8 WATT |
| IP Rating | IP66 |
| IK Rating | IK08 |
| Material | High corrosion resistance extruded copper-free aluminium |
| Coating | Polyester powder coating wit phosphochromating pre-finish |
| Light source | 20 x mid-power SAMSUNG 2835 LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in |
| Glass | Tempered |
| Power cable | 0,5 mt. power cable included |
| Gross weight | 1,70 Kg |

